

AD-A094 688

AD-A 094 688

NAVAIRDEVGEN-79156-60



NADC

Tech. Info.

# DESIGN AND TEST OF A HYDRA-OPTIC FLIGHT CONTROL ACTUATION SYSTEM (HOFCAS) CONCEPT

DECEMBER 1980

FINAL REPORT FOR PERIOD  
SEPTEMBER 1979-DECEMBER 1980

Approved for Public Release  
Distribution Unlimited

Prepared For:

NAVAL AIR SYSTEMS COMMAND (AIR 340D)  
Department of the Navy  
Washington, DC 20361

AIRCRAFT AND CREW SYSTEMS TECHNOLOGY DIRECTORATE (CODE 60/2)  
Naval Air Development Center  
Warminster, PA 18974

DTIC QUALITY INSPECTED 3



Rockwell International

North American Aircraft Division

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)


REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER NADC-79156-60	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) DESIGN AND TEST OF A HYDRA-OPTIC FLIGHT CONTROL ACTUATION SYSTEM (HOFCAS) CONCEPT		5. TYPE OF REPORT & PERIOD COVERED Final Report 18 SEP 1979 - 17 DEC 1980
		6. PERFORMING ORG. REPORT NUMBER NR80H-87
7. AUTHOR(s) Lloyd L. Kohnhorst Domenic A. Magnacca		8. CONTRACT OR GRANT NUMBER(s) N62269-79-C-0709
9. PERFORMING ORGANIZATION NAME AND ADDRESS Rockwell International North American Aircraft Division 4300 E. Fifth Avenue, Columbus, OH 43216		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS Naval Air Development Center Warminster, PA 18974		12. REPORT DATE December 1980
		13. NUMBER OF PAGES 105
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) AIR-530311 and AIR-340D Naval Air Systems Command Department of the Navy Washington, DC 20361		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report)  Approved for Public Release; Distribution Unlimited		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Direct Digital Drive Flight Control Actuation Digital Fly-By-Light EMI Immunity Hydra-Powered Alternator Optical Control		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The feasibility of the Hydra-Optic Flight Control Actuation System (HOFCAS) concept was demonstrated in a laboratory program. The concept offers a realistic approach for reducing susceptibility to electromagnetic hazards in fly-by-wire control systems. The system features a modular design, digital direct drive actuator that will offer improved performance and reliability by reducing system complexity. The laboratory testing demonstrated the concept functions satisfactorily and is ready for flight testing in a T-2C aircraft.		

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

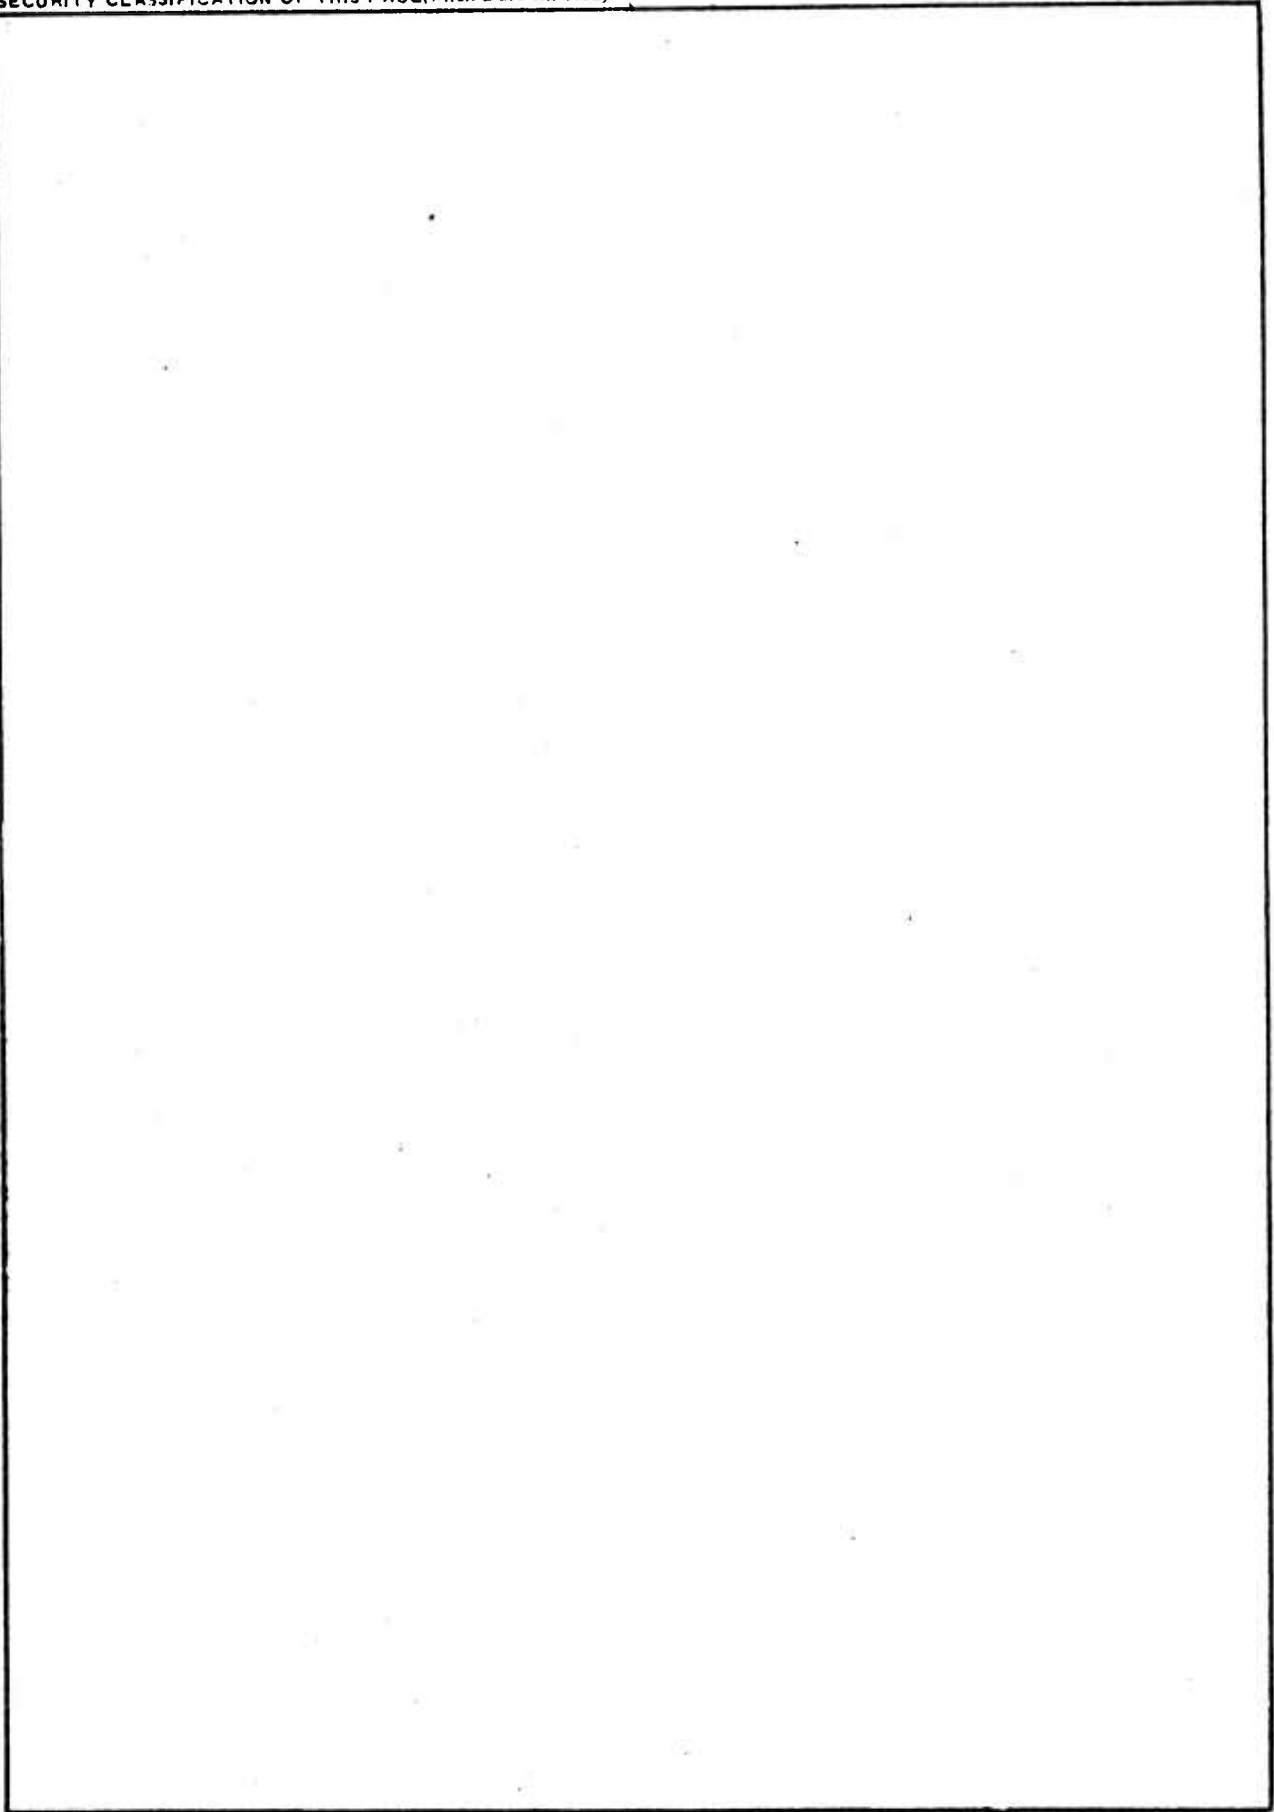

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

## SUMMARY

This report describes the development, testing and demonstration of a Hydra-Optic Flight Control Actuation System (HOFCAS) suitable for the actuation tasks of a Digital Fly-By-Wire flight control system. HOFCAS offers a realistic, cost effective approach to reducing the susceptibility of aircraft fly-by-wire systems to EMP, EMI, RFI, lightning, etc. By removing the conventional wiring to the actuation areas of an aircraft, the concept eliminates the opportunity for electromagnetic hazards to enter the system.

The HOFCAS concept provides a direct drive, hydraulically powered surface actuation system that provides immunity to electromagnetic radiation. The direct drive actuator, developed in a previous multi-phase Navy Advanced Flight Control Actuation System (AFCAS) program, uses an electrical torque motor to power a single stage hydraulic valve for control of the actuator. A hydraulically powered alternator supplies the electrical power needed to operate the torque motor. The actuator command signal is supplied by a fiber optic link. The HOFCAS was configured to operate the directional control system in a T-2C aircraft. The AFCAS program demonstrated direct digital control of a surface actuator, and the HOFCAS extends this technology to demonstrate that conventional interconnecting electrical wiring to the surface actuators can be eliminated.

The HOFCAS was laboratory tested using T-2C flight hardware and the results demonstrated the system to be completely acceptable for flight testing. The laboratory setup, including controls and signal paths, simulated the T-2C installation. Additional testing was performed on various components to establish areas where design improvements could be added to extend the capability of the concept. This was especially true with the Hydra-Powered Alternator (HPA) where the data indicates a significant improvement can be obtained with an alternator and electronics specifically designed for this application.

**(DTIC QUALITY INSPECTED 3)**

## PREFACE

This report documents research conducted by the North American Aircraft Division of Rockwell International Corporation, Columbus, Ohio, under contract N62269-79-C-0709 with the Naval Air Development Center, Warminster, Pennsylvania. Technical direction was provided by Mr. C. Abrams, the Program Manager for Navy Flight Control (Code 6012).

This report discusses the development, test, and demonstration of a Hydra-Optic Flight Control Actuation System (HOFCAS) for Digital Fly-By-Light control. The HOFCAS utilized the assets from the previous AFCAS programs and was designed to be flight tested and evaluated in a T-2C aircraft.

Acknowledgement is given to the following for participation on this project:

Mr. E. Solomon - System Engineer  
Mr. B. Holland - Hydraulic Engineer

Appreciation is extended to the many individuals who provided helpful support and constructive criticism of the program; in particular Mr. C. Abrams, Mr. T. Jansen, and Mr. W. Kaniuka of the Naval Air Development Center.

Discussions in this report of components and material supplied by various manufacturers shall not be construed as either an endorsement or criticism of any item. The Government incurs no liability or obligation to any supplier from the information presented herein.

## TABLE OF CONTENTS

	<u>TITLE</u>	<u>PAGE NO.</u>
	SUMMARY	1
	PREFACE	2
	TABLE OF CONTENTS	3
	LIST OF FIGURES	5
	LIST OF TABLES	9
1.0	INTRODUCTION	10
	1.1 BACKGROUND INFORMATION	10
	1.2 OBJECTIVE	11
	1.3 TECHNICAL APPROACH	11
2.0	HYDRA-OPTIC FLIGHT CONTROL ACTUATION SYSTEM (HOFcas)	14
	2.1 GENERAL DESCRIPTION	14
	2.2 SYSTEM DESCRIPTION	14
	2.3 HYDRA-POWERED ALTERNATOR (HPA)	19
	2.4 ELECTRONIC DRIVE UNIT (EDU)	19
	2.5 TRANSDUCERS	21
	2.5.1 Pedal Force Transducers	21
	2.5.2 Actuator LVDT Position Feedback Transducers	21
	2.6 AFCAS ACTUATOR	24
	2.7 MICROCOMPUTER ASSEMBLY AND POWER SUPPLY	25
	2.8 SOFTWARE DESCRIPTION	27
	2.8.1 Function	27
	2.8.2 Program Modules	27
	2.9 HYDRAULIC SUPPLY	29
3.0	LABORATORY TESTS	31
	3.1 TEST OBJECTIVES	31
	3.2 TECHNICAL APPROACH	31
	3.2.1 Components	31
	3.2.2 Lab Setup	31
	3.3 FUNCTIONAL TESTS	31
	3.3.1 Hydra-Powered Alternator (HPA)	31
	3.3.2 System Null and Gain Tests	40
	3.4 INTEGRATION TESTS	46
	3.4.1 System Response	46
	3.4.2 EDU Power Supplies	49
	3.4.3 Simulated Failures	52

TABLE OF CONTENTS (Cont'd)

	<u>TITLE</u>	<u>PAGE NO.</u>
3.5	PERFORMANCE TESTS	53
3.5.1	System Frequency Response, Maximum Gain, DFBL Mode	53
3.5.2	System Frequency Response, ABU Mode	53
3.6	ENVIRONMENTAL TESTS	53
3.6.1	Fiber Optic Loop	53
3.6.2	Hydra-Powered Alternator (HPA)	53
4.0	ANALYSIS OF RESULTS	56
4.1	HYDRA-POWERED ALTERNATOR (HPA)	56
4.2	FIBER OPTIC LINK	57
4.3	FLIGHT TEST CONFIGURATION	57
4.4	HOFCAS PERFORMANCE	59
5.0	CONCLUSIONS AND RECOMMENDATIONS	61
	REFERENCES	62
 <u>APPENDICES</u>		
A	MICROCOMPUTER AND SOFTWARE	63
B	HYDRA-POWERED ALTERNATOR (HPA)	87
	LIST OF ABBREVIATIONS/ACRONYMS	101
	SUMMARY OF METRIC CONVERSIONS	105



## LIST OF FIGURES

<u>FIGURE NO.</u>	<u>TITLE</u>	<u>PAGE NO.</u>
1-1	T-2C DEMONSTRATOR AIRCRAFT	12
2-1	HOFCAS SIMPLIFIED BLOCK DIAGRAM	15
2-2	HOFCAS OPERATIONAL MODES, SIMPLIFIED BLOCK DIAGRAM	16
2-3	HYDRA-OPTIC FLIGHT CONTROL ACTUATION SYSTEM (HOFCAS) T-2C (INSTALLATION SCHEMATIC)	17/18
2-4	HPA TURBINE WHEEL AND ALTERNATOR	20
2-5	HPA ASSEMBLY	20
2-6	EDU WITH FIBER OPTIC CABLES ATTACHED	22
2-7	PEDAL FORCE TRANSDUCERS	22
2-8	RUDDER ACTUATOR ASSEMBLY	23
2-9	MICROCOMPUTER UNIT WITH FIBER OPTIC CABLES ATTACHED	26
2-10	DFBL MICROCOMPUTER PROGRAM FLOW CHART	28
2-11	LABORATORY TEST SETUP PICTORIAL	30
3-1	HPA NO-LOAD TEST SETUP	32
3-2	HPA VAC AND FREQUENCY VERSUS HPA $\Delta P$ , NO-LOAD	34
3-3	HPA FLUID FLOW AND TEMPERATURE VERSUS HPA $\Delta P$ , NO-LOAD	34
3-4	HPA NO-LOAD OUTPUT VOLTAGE WAVEFORM	35
3-5	HPA LOAD TEST SETUP	36
3-6	HPA VAC & FREQUENCY VERSUS HPA OUTPUT CURRENT	37



LIST OF FIGURES (Cont'd)

<u>FIGURE NO.</u>	<u>TITLE</u>	<u>PAGE NO.</u>
3-7	TRANSFORMER SECONDARY VAC & CURRENT VERSUS HPA OUTPUT CURRENT (TRANSFORMER PRIMARY)	37
3-8	TRANSFORMER PRIMARY & SECONDARY NO-LOAD VOLTAGE WAVEFORMS	38
3-9	TRANSFORMER PRIMARY AND SECONDARY FULL-LOAD VOLTAGE WAVEFORMS	38
3-10	HPA VA OUTPUT VERSUS HPA $\Delta P$ , CONSTANT RESISTIVE LOAD	39
3-11	HPA FLOW AND FREQUENCY VERSUS HPA $\Delta P$ , CONSTANT RESISTIVE LOAD	39
3-12	TRANSFORMER PRIMARY AND SECONDARY VOLTAGE WAVEFORMS, 2500 PSI HPA $\Delta P$	40
3-13	NULL AND GAIN TEST SETUP	41
3-14	FIBER OPTIC LOOP TRANSMITTER INPUT AND RECEIVER OUTPUT WAVEFORMS, CHANNEL #1	42
3-15	FIBER OPTIC LOOP RECEIVER OUTPUT AND MOTOR COIL #1 CURRENT WAVEFORMS	42
3-16	FIBER OPTIC LINK INPUT/OUTPUT WAVEFORMS, STATIC GAIN TEST	45
3-17	EDU INPUT VOLTAGE WAVEFORM, SYSTEM NULL (MICROCOMPUTER PWM OUTPUT @ 50% MODULATION)	45
3-18	SYSTEM DYNAMIC TEST LAB SETUP	47
3-19	DIGITAL FLY-BY-LIGHT MODE SYSTEM RESPONSE, FLIGHT GAIN CONFIGURATION, AIRCRAFT POWER (400 HZ)	48
3-20	DIGITAL FLY-BY-LIGHT MODE SYSTEM RESPONSE, FLIGHT GAIN CONFIGURATION, HPA POWER (1000 HZ)	48

LIST OF FIGURES (Cont'd)

<u>FIGURE NO.</u>	<u>TITLE</u>	<u>PAGE NO.</u>
3-21	DIGITAL FLY-BY-WIRE MODE SYSTEM RESPONSE, FLIGHT GAIN CONFIGURATION, AIRCRAFT POWER (400 HZ)	50
3-22	DIGITAL FLY-BY-WIRE MODE SYSTEM RESPONSE, FLIGHT GAIN CONFIGURATION, HPA POWER (1000 HZ)	50
3-23	STEP INPUT RESPONSE, FLIGHT GAIN CONFIGURATION, DFBL MODE	51
3-24	STEP INPUT RESPONSE, FLIGHT GAIN CONFIGURATION, DFBW MODE	51
3-25	DIGITAL FLY-BY-LIGHT MODE SYSTEM RESPONSE, MAXIMUM CAPABILITY, HPA POWER (1000 HZ) AND AIRCRAFT POWER (400 HZ)	54
3-26	ANALOG BACK-UP MODE SYSTEM RESPONSE, FLIGHT GAIN CONFIGURATION, AIRCRAFT POWER (400 HZ)	54
3-27	TEMPERATURE TEST FIBER OPTIC LOOP INPUT AND OUTPUT WAVEFORMS	55
4-1	TORQUE MOTOR CHARACTERISTICS	58
4-2	AFCAS FREQUENCY RESPONSE	60
4-3	FREQUENCY RESPONSE, AFCAS DESIGNED FOR DIRECT DIGITAL DRIVE	60
A-1	MONOBOARD MICROCOMPUTER BLOCK DIAGRAM	65
A-2	MONOBOARD MICROCOMPUTER	66
A-3	MICROPROCESSOR UNIT ORGANIZATION (MC6800)	67
A-4	ANALOG-TO-DIGITAL CONVERTER - MP7208/7216	70
A-5	DIGITAL-TO-ANALOG CONVERTER - MP7104	70
A-6	PROM MAP	86

LIST OF FIGURES (Cont'd)

<u>FIGURE NO.</u>	<u>TITLE</u>	<u>PAGE NO.</u>
B-1	HPA, FRONT VIEW	89
B-2	HPA, TOP VIEW	90
B-3	HPA, SECTIONED VIEW	91

## LIST OF TABLES

<u>TABLE NO.</u>	<u>TITLE</u>	<u>PAGE NO.</u>
I	MOTOR COIL CURRENTS, SYSTEM NULL	43
II	FIBER OPTIC LINK INPUT/OUTPUT SIGNALS VERSUS SIMULATED LVDT AND PEDAL COMMAND INPUTS	44
III	ACTUATOR POSITION VERSUS PEDAL COMMAND	46
IV	EDU CHANNELS 1 AND 2 POWER SUPPLY OUTPUTS, SYSTEM NULL	52
A-I	ACCUMULATOR AND MEMORY INSTRUCTIONS (MC6800)	68
A-II	INDEX REGISTER AND STACK MANIPULATION INSTRUCTIONS (MC6800)	69
A-III	JUMP AND BRANCH INSTRUCTIONS (MC6800)	69
A-IV	CONVERTER CHARACTERISTICS	71
A-V	PROGRAM LISTING	72
B-I	PERFORMANCE SPECIFICATION, HPA	94
B-II	APPLICABLE MILITARY SPECIFICATIONS	96

## 1.0 INTRODUCTION

### 1.1 BACKGROUND INFORMATION

The development of Advanced Flight Control Actuation Systems (AFCAS) for the next generation aircraft has been a joint undertaking by the Navy and Rockwell International Corporation since 1972. The Navy recognized the need for advanced high performance flight control actuation systems as used for Fly-By-Wire but without the increased complexity normally associated with these systems. The AFCAS program investigated totally new approaches for surface actuation instead of using the traditional actuators with added accessories and functions. As a result, the AFCAS program offers an approach to surface actuator standardization and reduced actuator complexity. This in turn produces reduced cost, size and weight while still providing improved performance.

The AFCAS concept being developed by the Naval Air Development Center (NADC) is a direct-drive, lightweight, hydraulic surface actuation system capable of being controlled with a direct digital command. This Direct Digital Drive (D<sup>3</sup>) actuation system and the lightweight hydraulics, have been successfully flight tested and shown to be a practical approach to surface actuation. This project utilizes AFCAS with new approaches incorporated to eliminate the conventional interconnecting cabling to the surface actuator.

A major concern for future fly-by-wire aircraft is protection against electronic hazards such as EMI, EMP, lightning, high energy radiation, and spurious signals. If control signals can be transmitted via light pulses, particularly to the actuation regions, then electromagnetic transient protection can be greatly enhanced. By removing all electrical connections to the actuator, electromagnetic coupling which would allow RFI, lightning or other transient signals to enter would be eliminated. The electrical power required to receive and utilize the light pulses would be generated hydraulically within the actuator. The electronics to restore the digital signal and drive the electrohydraulic valve would also be contained within or on the actuator. The system developed for this project offers an approach for meeting the goal of a direct drive surface actuator with no interconnecting cabling.

The AFCAS program that preceded this study was a six phase program (References 1 through 6) that explored the feasibility of direct drive, developed the concept, and evaluated it in a series of laboratory and flight test programs. Phase VI of this program incorporated the microcomputer and successfully demonstrated the D<sup>3</sup> capability of the AFCAS. Pulse modulated signals, generated in the microcomputer, were power amplified in an Electronic Drive Unit (EDU) and used to control the direct drive actuator. An analog backup capability was also provided, whereby the EDU controlled the actuator directly and the microcomputer was not in the control loop.

## 1.2 OBJECTIVE

The general objective of this program was to assemble and test a direct-drive, lightweight, hydraulic surface actuator system that provides immunity to all forms of electromagnetic radiation. The specific goal was to operate the Navy's digital AFCAS without the need for electrical power being transmitted to the actuator. This was accomplished by modifying the Navy's AFCAS to operate with a hydraulically-driven alternator supplying the electrical power, and adding an optical command link between the microcomputer and the direct drive actuator electronics.

## 1.3 TECHNICAL APPROACH

The technical approach used to develop the Hydra-Optic Flight Control Actuation System (HOFCAS) was to utilize assets developed under the previous six-phase AFCAS program and to demonstrate, through laboratory testing, that the HOFCAS concept is suitable for flight in the T-2C Demonstrator Aircraft. The AFCAS actuator, the transducers, and the microcomputer power supply were used without change. The microcomputer and the EDU were modified to incorporate optical data transmission. A Hydra-Powered Alternator (HPA) was added to supply the electrical power needed for the actuator drive unit. Additional changes were made to the system switching and interconnecting wiring to incorporate the new modes of operation.

The system configuration was designed and tested to verify that the HOFCAS is suitable for controlling the rudder of a T-2C aircraft, shown in Figure 1-1. For this application the T-2C control system will be modified from a mechanically powered cable system to a full powered Digital Fly-By-Light (DFBL) system with an Analog Back-Up (ABU) mode of operation. The original cable system between the rudder pedals and the rudder will be removed. The rudder pedal will be attached to force transducers. Force on the rudder pedal is converted to a proportional electrical signal by these force transducers. This signal is supplied to a microcomputer where it is summed with the feedback signal and processed into a pulse modulated error signal. The pulse modulated error signal is transmitted optically through fiber optic cables to the EDU where it is converted to electrical signals, power amplified, and used to control the torque motor of a direct drive hydraulic rudder actuator. This modified system provided full power DFBL control of the rudder, instead of the manually operated rudder of the basic T-2C aircraft.

The HOFCAS mounting requirements, lead length, and hydraulic and electrical power sources were selected to be compatible with the T-2C. The HOFCAS evaluation criteria were selected to meet the dynamic performance requirement of the T-2C aircraft. Safety provisions, including failure mode evaluation, were based on T-2C flight safety requirements. The previous AFCAS flight test program included a hydraulic bypass valve on the direct drive actuator. This device allows the rudder to seek a trail position if the rudder control system were lost. Flight testing has established the aircraft can be safely landed with the rudder in the trail position. This feature establishes a third level of redundancy beyond the DFBL and the ABU modes of control.



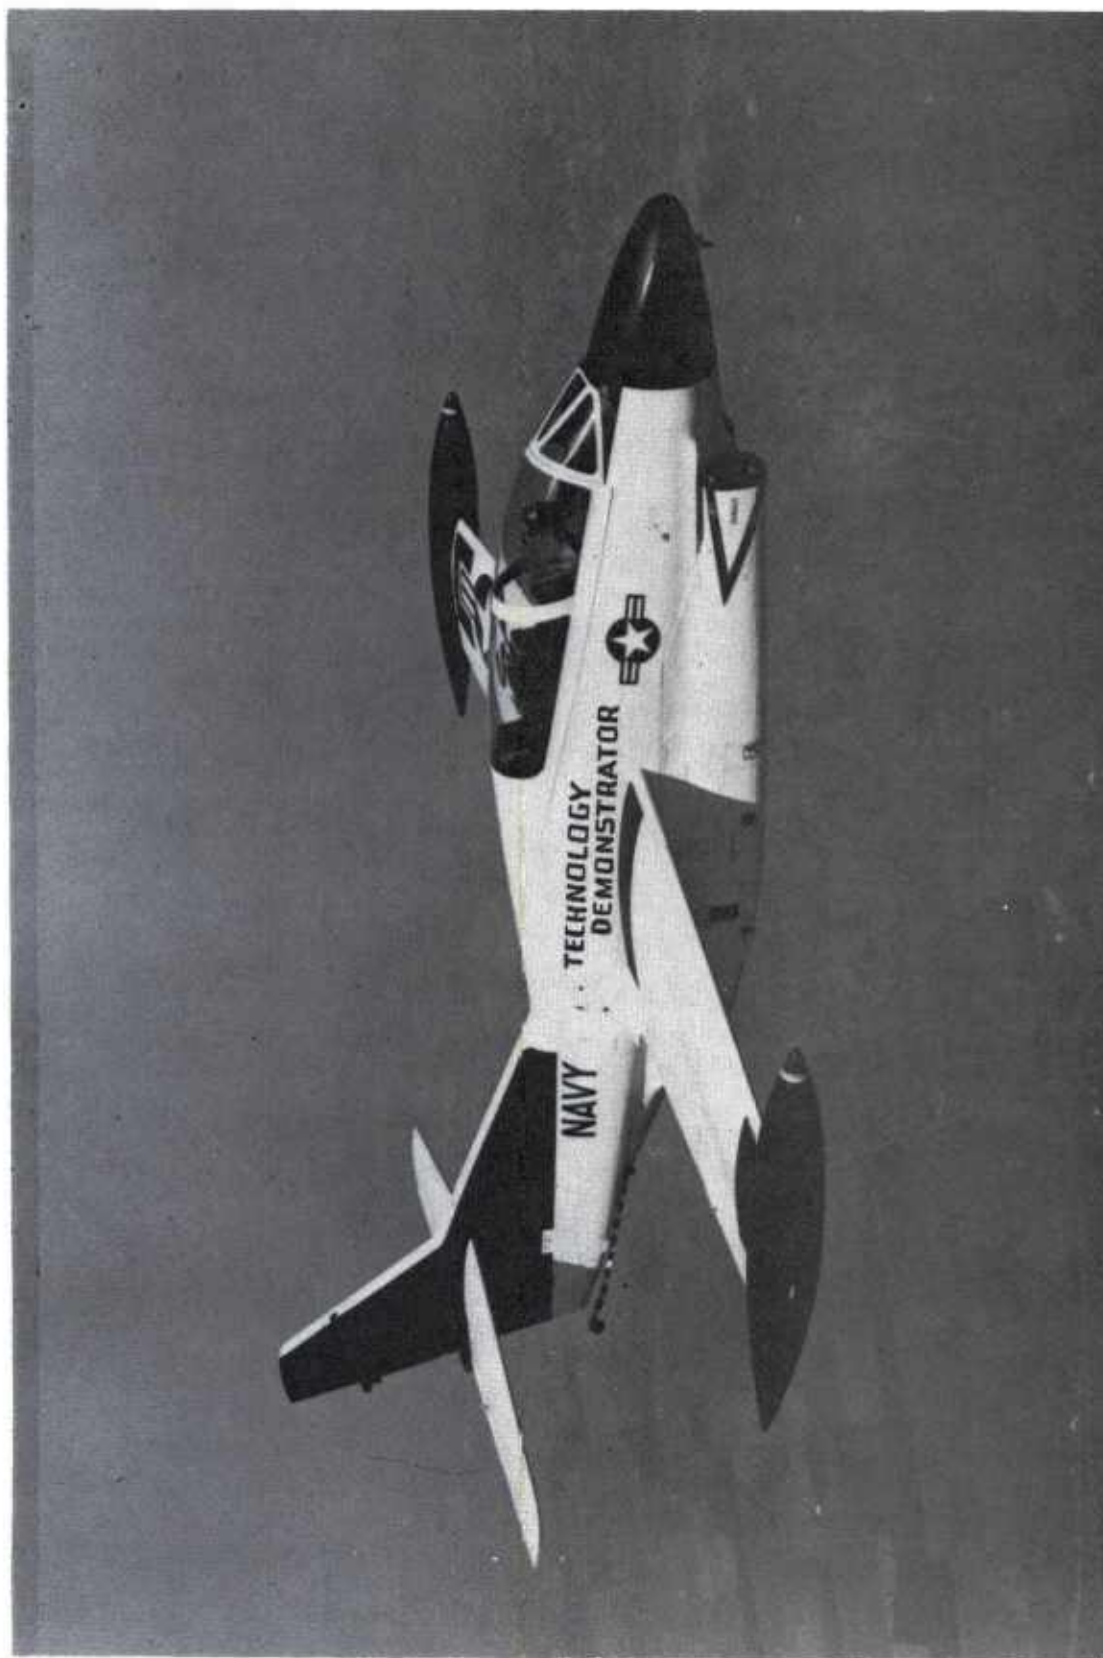


Figure 1-1. T-2C Demonstrator Aircraft



All the major components needed to fly the HOF CAS in the T-2C were assembled in the laboratory for the system testing. System and component tests were performed to insure satisfactory operation in the T-2C. Additional system tests were performed that exceeded T-2C requirements. These tests were performed to establish the performance levels possible with the present HOF CAS and to identify areas where improvements could be made if necessary.

This approach makes use of existing Navy hardware to test and evaluate several critical portions of an actuation system that eliminates the need for wiring to transmit power and signal to the actuation region. The Navy currently has a separate program for developing an optical position sensor to provide a feedback for this direct drive hardware. After the optical sensor, the HPA, and the EDU are integrated into a common actuation package with the D<sup>3</sup> actuator, the general objectives of this program will be achieved.

## 2.0 HYDRA-OPTIC FLIGHT CONTROL ACTUATION SYSTEM (HOFCAS)

### 2.1 GENERAL DESCRIPTION

The HOFCAS utilizes a direct drive actuation system, commanded by light, with self contained electrical power to control an aircraft rudder actuation system. The system hardware for this program is a modification of the Phase VI Direct Digital Drive AFCAS program hardware previously evaluated and described in Reference 6.

A simplified block diagram showing the major components of the HOFCAS system is contained in Figure 2-1. The shaded areas in Figure 2-1 indicate the units modified or added for the HOFCAS. The microcomputer and the EDU were modified to incorporate the optical command link (new) and the HOFCAS Hydra-Powered Alternator (HPA) is a new unit added to provide electrical power for the EDU in the Digital Fly-By-Light (DFBL) mode.

### 2.2 SYSTEM DESCRIPTION

Two modes of system operation are provided, the DFBL and the ABU modes. Figure 2-2 contains a block diagram that illustrates the two modes of operation, and a functional schematic of the system is shown in Figure 2-3.

The DFBL mode is selected by momentarily holding the cockpit DFBL ENGAGE switch to ON, energizing the DFBL control relays and resulting in the following:

- The pedal command and actuator feedback transducer outputs are connected to the microcomputer input.
- The microcomputer output is connected to the EDU via the fiber optic control link.
- Hydraulic pressure is supplied to the HOFCAS HPA, and the 26 VAC, 1000 HZ HPA output is used to power the EDU via a 26 VAC to 115 VAC step-up transformer. The EDU input power is utilized to provide excitation for the transducers and to condition, amplify, and convert the optical signals into electrical signals which are power amplified and used to drive the torque motor coils.

If the microcomputer senses the system is functioning properly, a power ground is continuously supplied to the DFBL ENGAGE switch holding coil by the microcomputer and the system remains in the DFBL mode.

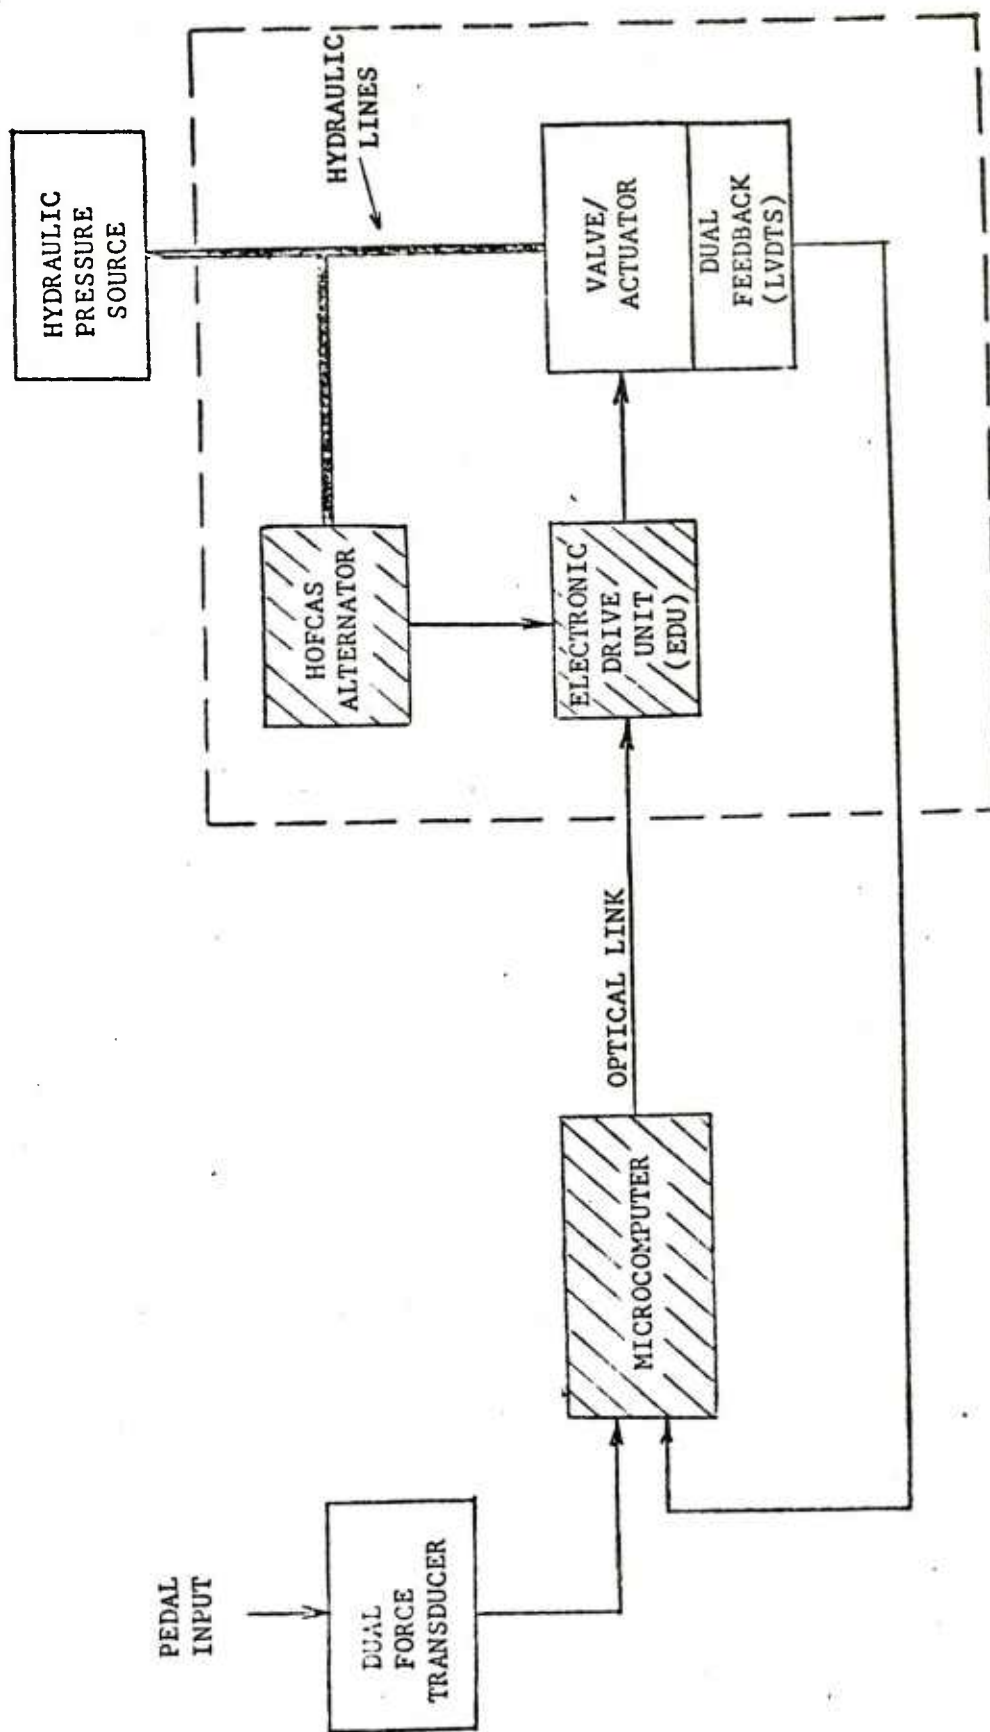


Figure 2-1. HOFCAS Simplified Block Diagram

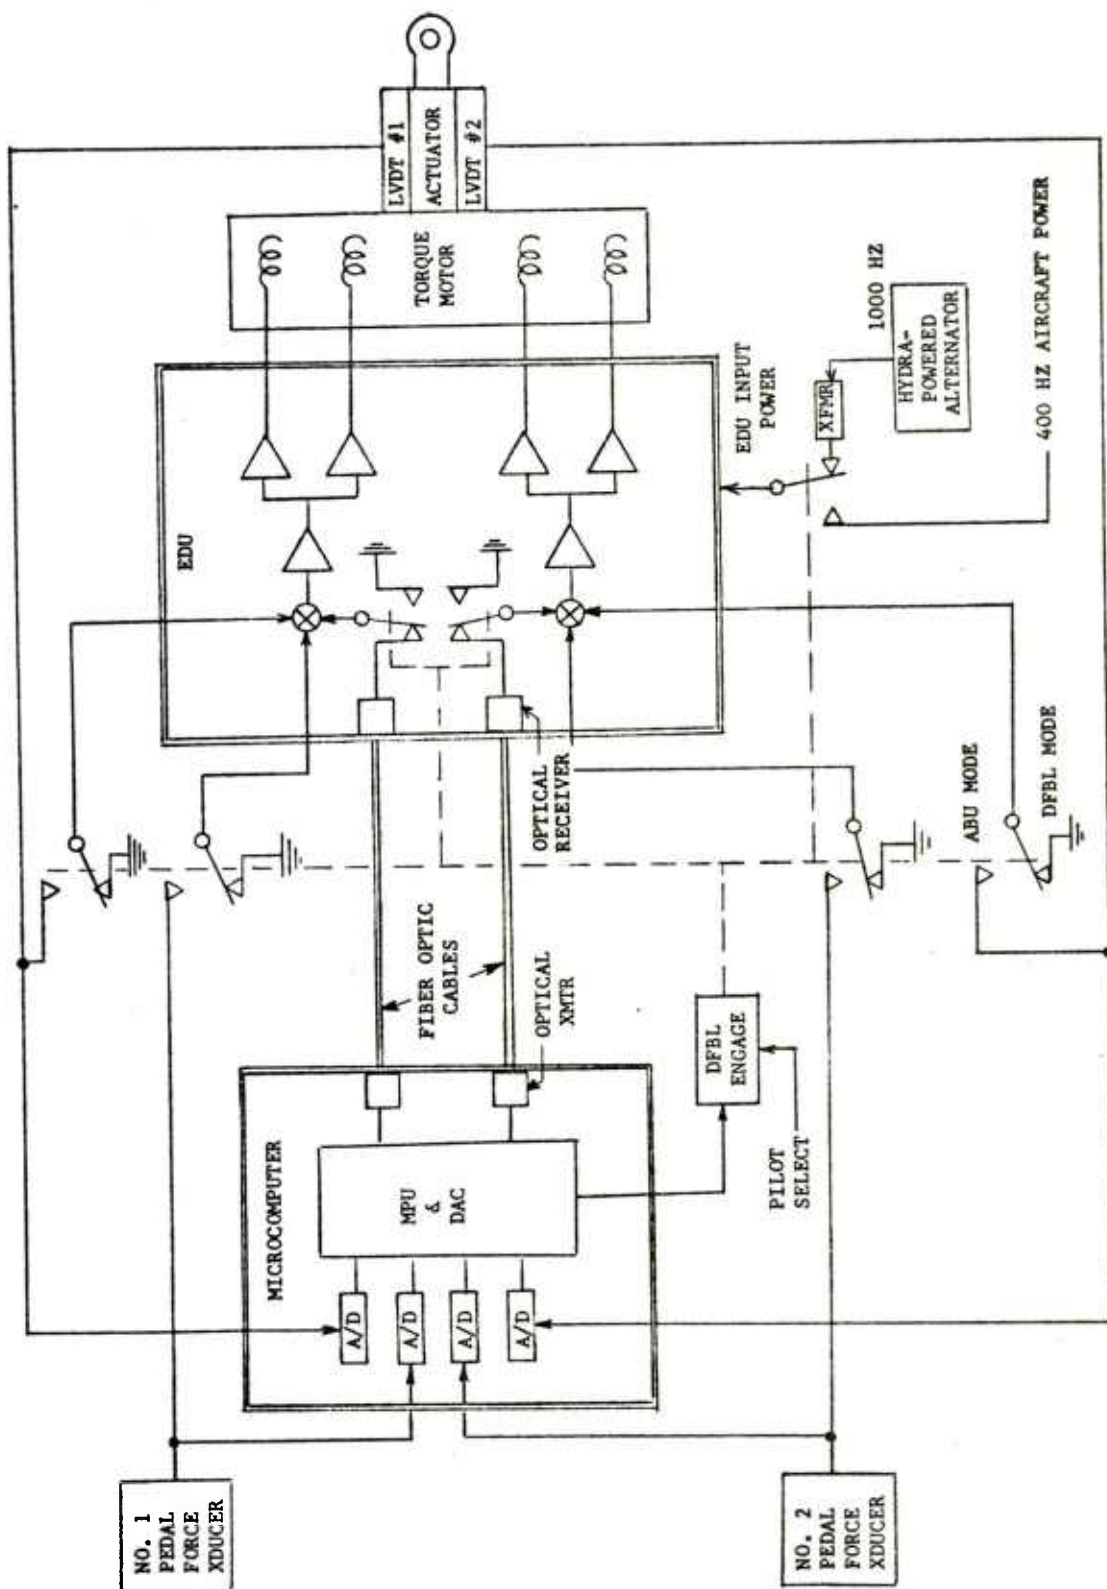


Figure 2-2. HOFCAS Operational Modes, Simplified Block Diagram

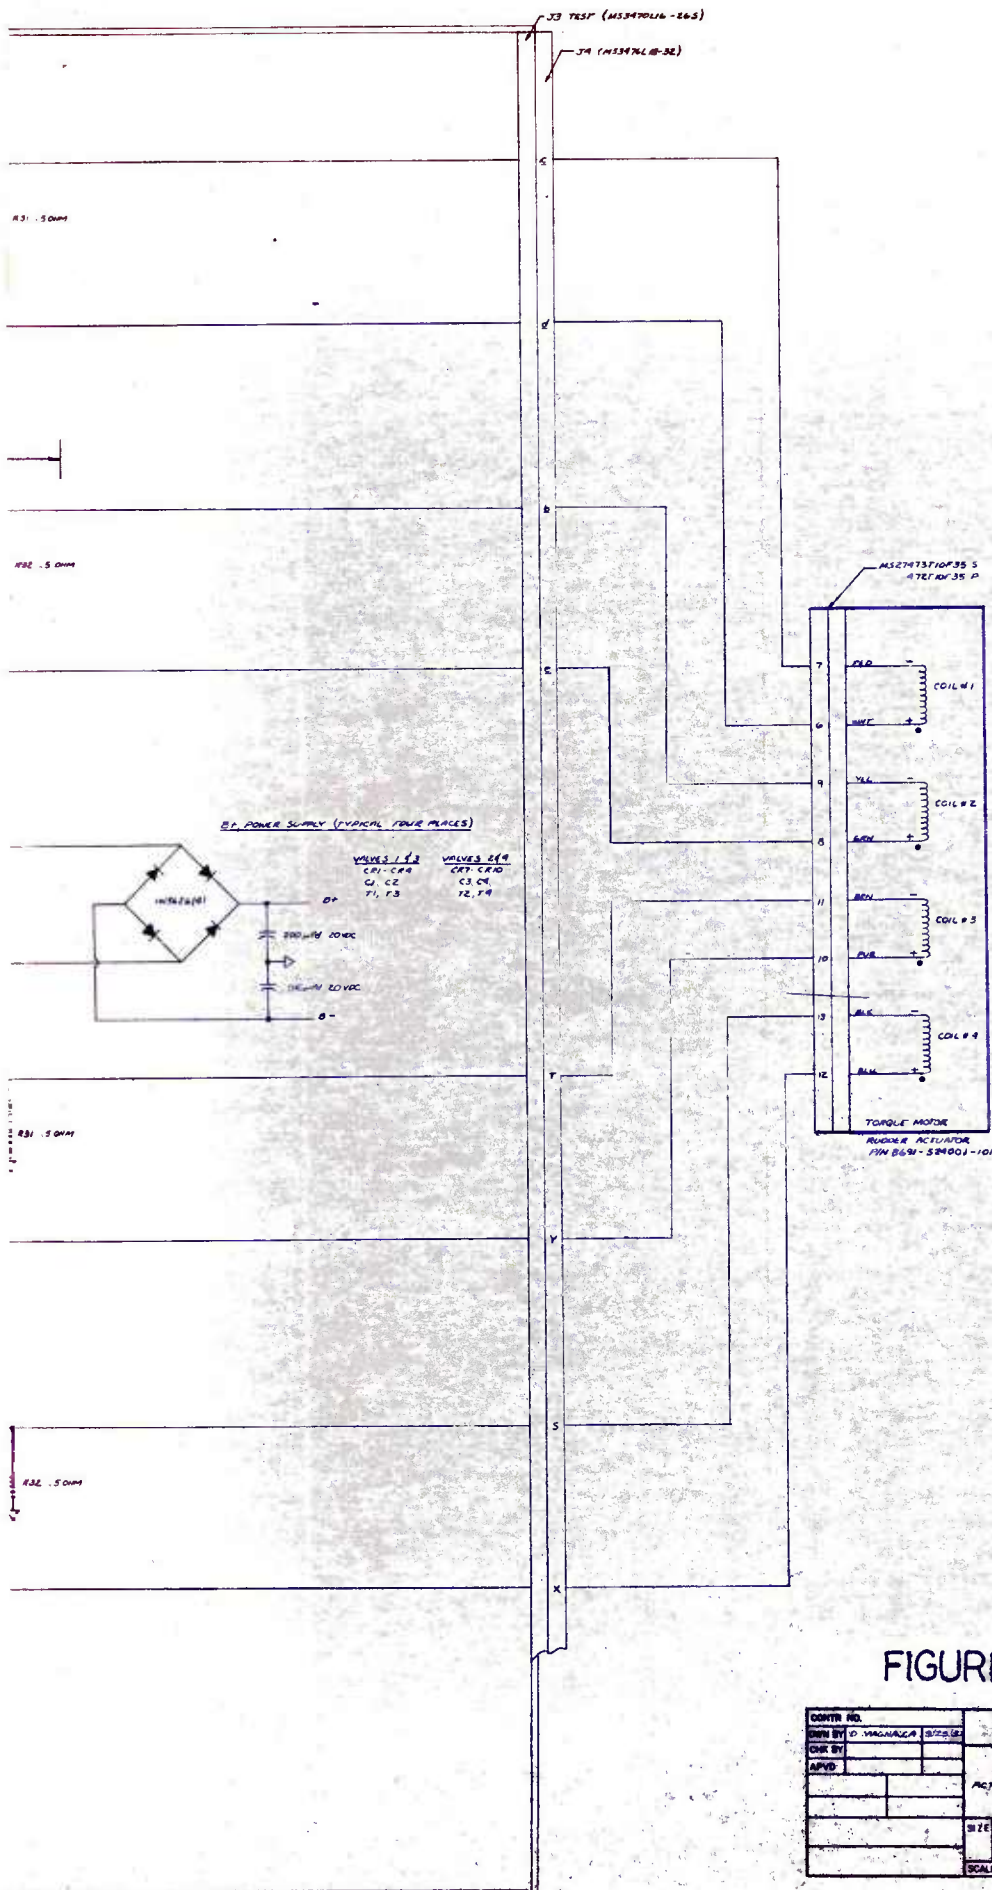


FIGURE 2-3

CONTR NO.		Columbus Aircraft Division	
OWN BY D. MACALUSO		North American Rockwell	
CHK BY		COLUMBUS DIV.	
APVD		HYDRA-OPTIC FLIGHT CONTROL	
		ACTUATION SYSTEM (HYDRA) T-2C	
		(HYDRA SCHEMATIC)	
SIZE CODE IDENT NO.		INFORMATION PRINT	
89372			
SCALE		SHEET	



The ABU mode can be selected by manually placing the DFBL ENGAGE switch to OFF, or automatically by the microcomputer removing the power ground from the DFBL ENGAGE switch holding coil if abnormal system operating errors occur.

Switching to the ABU mode results in the following:

- The fiber optic control link output from the microcomputer is disconnected from the EDU, and the pedal command and actuator feedback transducer outputs are connected directly to the EDU where they are summed and amplified to drive the four torque motor coils of the actuator direct drive valve.
- Hydraulic pressure is removed from the HOF CAS HPA, and the EDU is powered by 115 VAC, 400 HZ aircraft power.

The various system components are discussed in the following paragraphs.

### 2.3 HYDRA-POWERED ALTERNATOR (HPA)

The HOF CAS HPA assembly, Bertea P/N 287700, supplies electrical power to the EDU in the DFBL mode. The alternator rated output, at 3000 psi (21 MPa)  $\Delta P$  and a fluid flow of 0.72 gpm (2.7 L/min), is 25 watts @ 26 VAC, 1000 HZ. The HPA was not used in the previous Phase VI of the Digital AFCAS program and has been added for HOF CAS.

The unit consists of a hydraulically driven 2" (5.1 cm) diameter turbine wheel coupled to a conventional permanent magnet electric alternator, spun by fluid discharged from a .020" (.05 cm) diameter orifice. The 6-pole configuration of the alternator, Electro-Kinetics Model No. 4922-2, provides a frequency of 1000 HZ at 10,000 rpm.

The alternator output is nearly sinusoidal with a resistance load, and distorts to a pseudo square wave when inductive loads are applied (detailed data describing alternator output and waveforms are contained in section 3.3.1 of this report).

The HPA turbine wheel and alternator are shown in Figure 2-4 and the HPA assembly is shown in Figure 2-5. Additional alternator data is supplied in Appendix B.

### 2.4 ELECTRONIC DRIVE UNIT (EDU)

The EDU contains the electronics required for converting optical inputs to electrical input signals, signal conditioning and amplification, signal summation, and power amplification to current drive the actuator torque motor. The unit was designed by the North American Aircraft Division (NAAD) and contains two independent channels, each sub-divided into dual valve driver circuits.

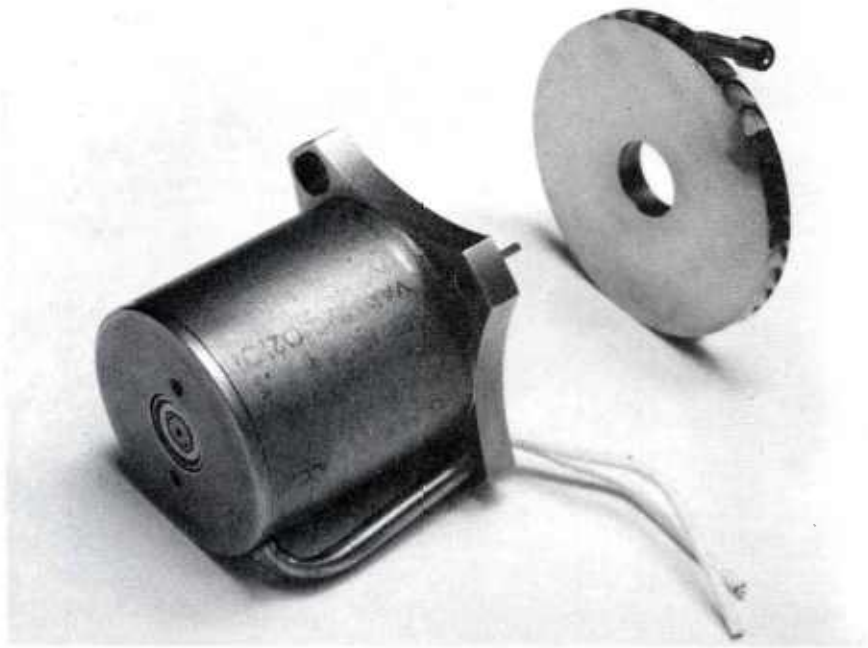


Figure 2-4. HPA Turbine Wheel and Alternator

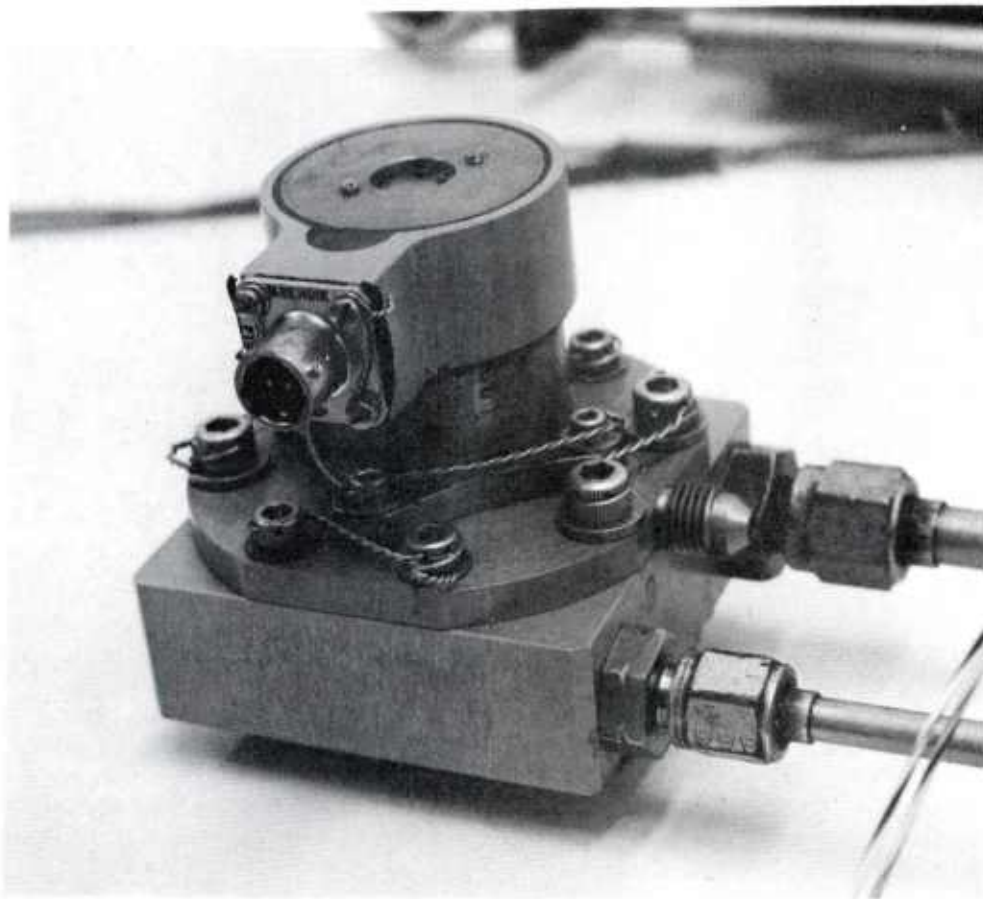


Figure 2-5. HPA Assembly



Each of the dual valve driver circuits employ current feedback with a highly reliable "Darlington" power transistor configuration. Redundant power supplies are used. The circuitry is designed so that in the event an output stage fails "hardover", the voltage applied to a motor coil will not exceed its rated value. This limiting feature permits a subunit failure to be compensated or nullified by another subunit. Closed loop tests showed that operation of the redundant subunits provided high immunity to component failures as reported in Reference 3, NR75H-1 Control by Wire Modular Actuator Tests (AFCAS).

The dual channel fiber optic receiver amplifier added for HOF CAS converts the microcomputer optical output signals to electrical input signals for the EDU. Each receiver amplifier channel contains a detector, two stages of gain, and a passive isolation circuit. The optical signals received consist of PWM information, and the passive isolation feature prevents a hardover of the rudder actuator if the drive signal is lost due to a microcomputer or fiber optic loop failure.

The dual channel fiber optic receiver amplifier and associated detectors are located on a single module board, contained in a housing mounted on the EDU. All electrical and optical connections to the module board were made to permit easy removal if return of the EDU to its original configuration is desired.

The modified EDU with fiber optic cables is depicted in Figure 2-6 and a functional schematic, including the fiber optic receiver amplifier, is included in Figure 2-3.

## 2.5 TRANSDUCERS

### 2.5.1 Pedal Force Transducers

Two force transducers, Schaevitz Model FTD-IT-500, are used to convert pedal forces into DC signals. Excitation is provided by the EDU  $\pm 15$  VDC power supplies. The force transducers are connected to the pedals through a cable/sector assembly having a mechanical advantage of 2.28 (pedal force  $\times$  2.28 = transducer force). The transducers have a maximum capacity of 500 lbs. (2.2 kN), a spring rate of approximately 8000 lb/in (1.4 MN/m), and a design scale factor of 0.01 v/lb (.002 v/N). The force transducers are shown in Figure 2-7.

### 2.5.2 Actuator LVDT Position Feedback Transducers

Two Schaevitz Model 2000 HCD DC Linear Variable Differential Transformers (LVDT's) provide dual position rudder actuator feedback signals. Excitation is provided by the EDU  $\pm 15$  VDC power supply. Actuator position travel,  $\pm 1.75$  in. ( $\pm 4.45$  cm) max., is converted through a bellcrank and push rod to angular travel of the rudder,  $\pm 12^\circ$  max. The design scale factor for both LVDT's is 5.0 VDC/inch (1.97 VDC/cm). The position transducers are shown mounted on the rudder actuator in Figure 2-8.

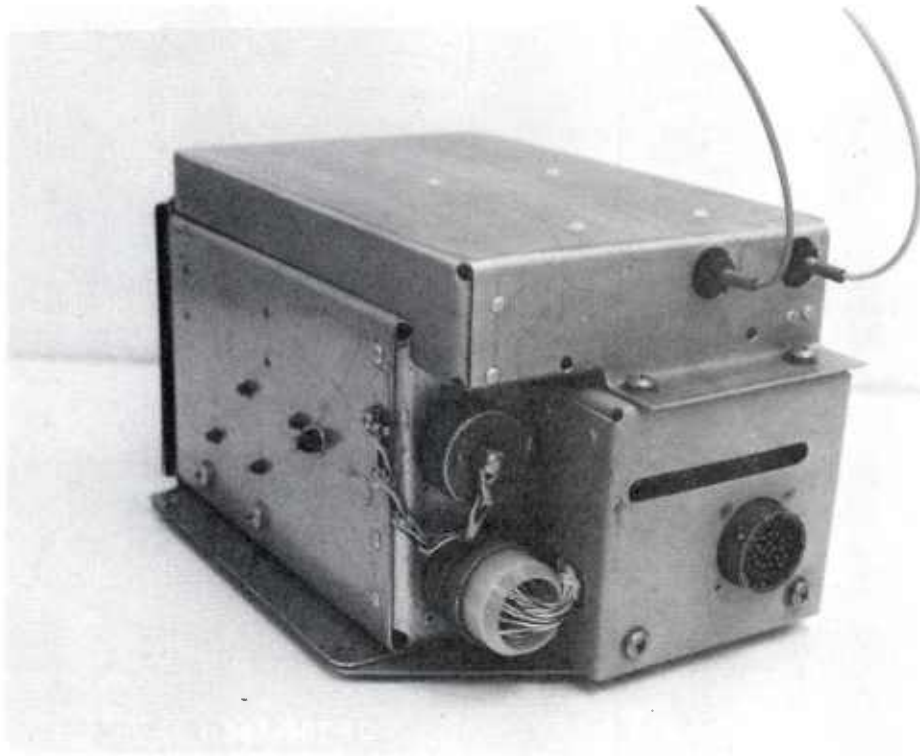


Figure 2-6. EDU With Fiber Optic Cables Attached

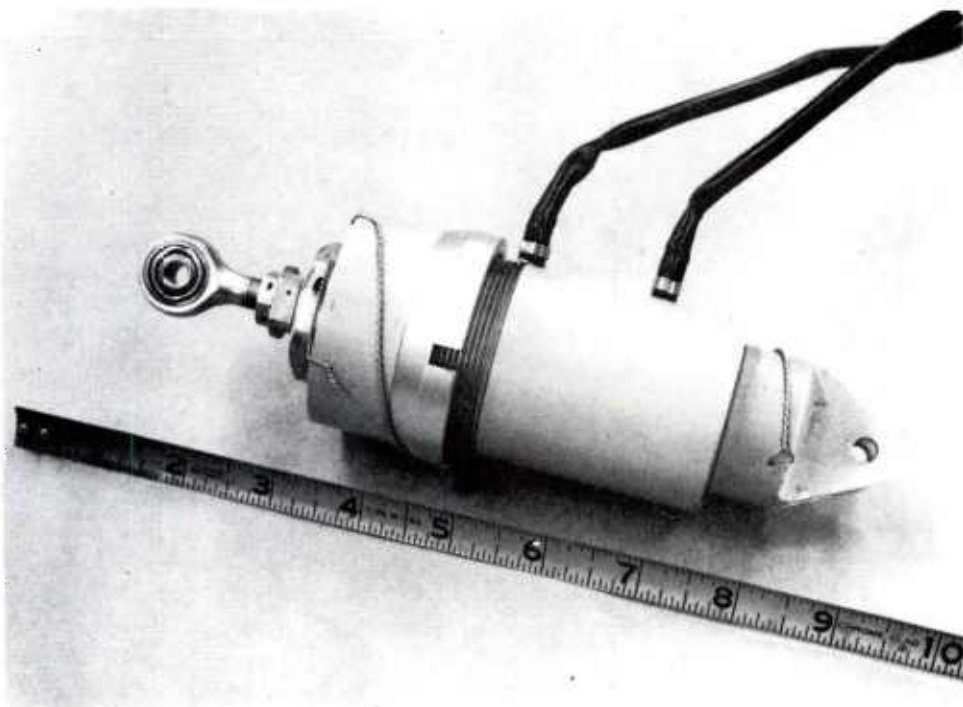


Figure 2-7. Pedal Force Transducers

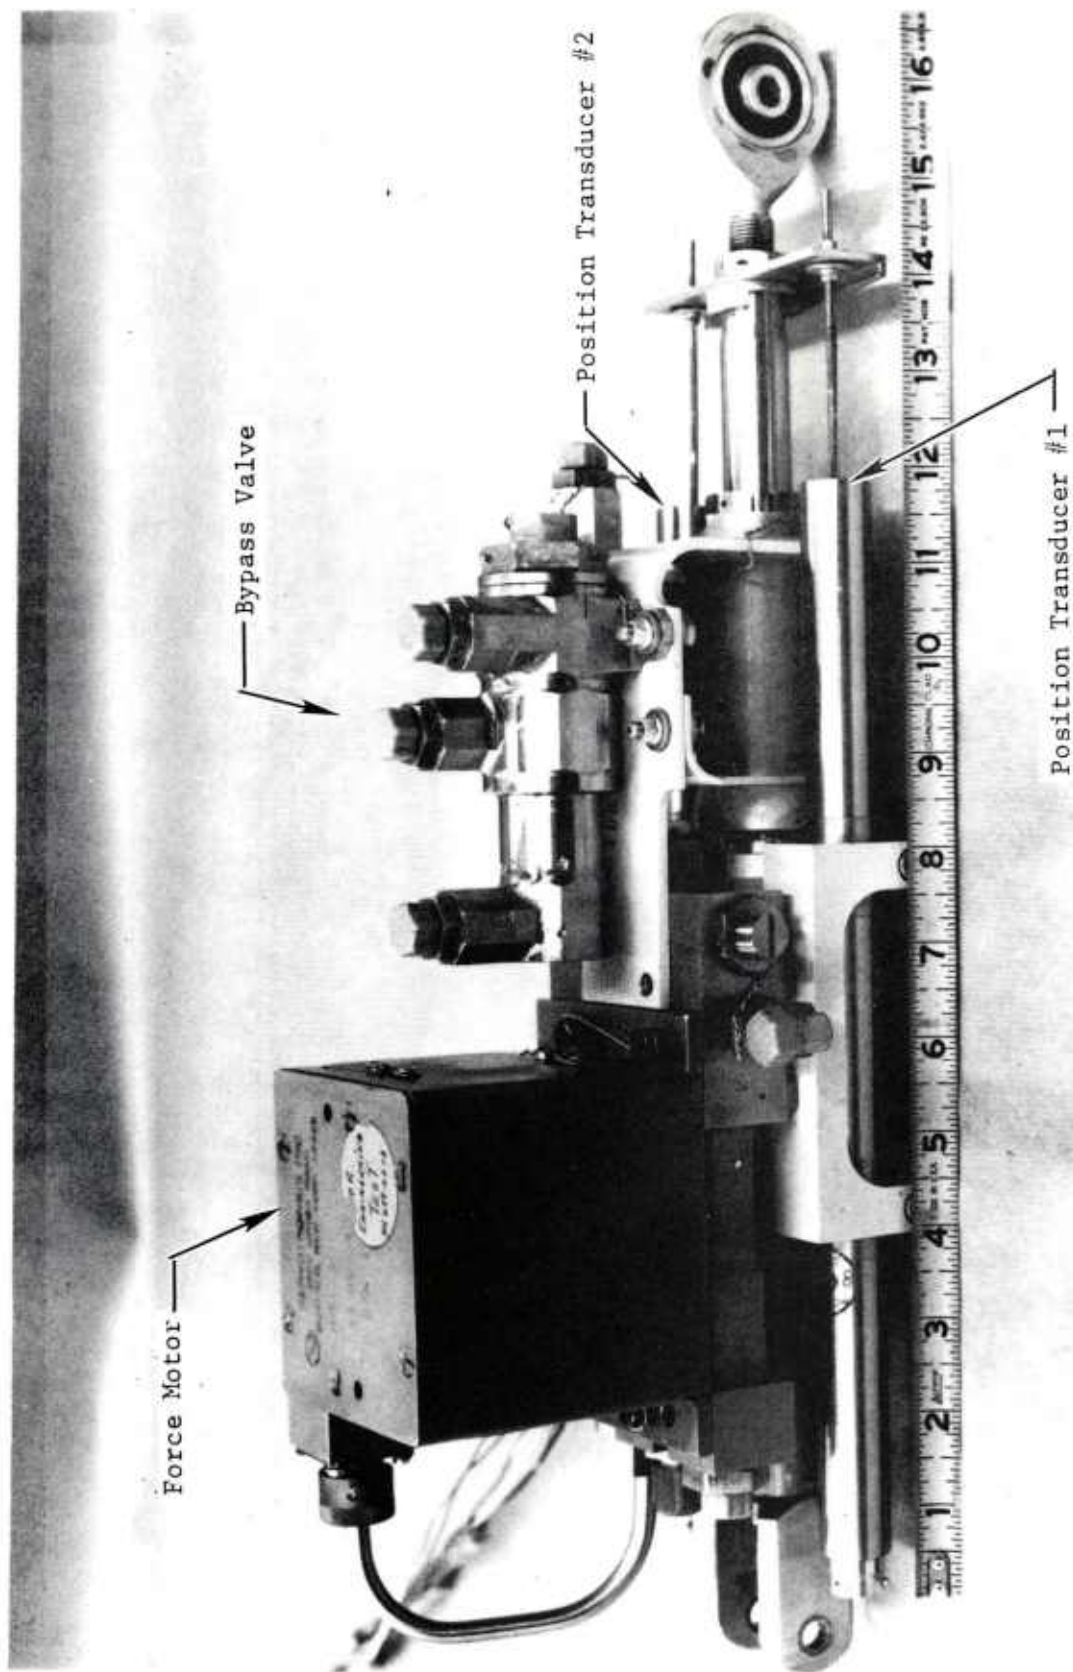


Figure 2-8. Rudder Actuator Assembly

The fly-by-wire AFCAS rudder actuator, P/N 8691-524001-101, is directly driven by a permanent magnet force motor having four independent coils for redundancy. The force motor armature is mechanically coupled to a spool/sleeve flow control valve which commands actuator piston rate. Piston feedback is provided by dual DC LVDT's mounted externally on opposite sides of the actuator housing. A hydraulic bypass valve was added to automatically interconnect the two cylinder chambers and allow the rudder to "trail", in the event hydraulic power is lost. The T-2C rudder has a travel of  $\pm 25^\circ$ . For safety reasons, rudder travel was reduced to  $\pm 12^\circ$  in the test installation by limiting actuator stroke. This permits the pilot to land safely with a "hardover" rudder, opposite engine out, and three knot cross-wind.

Actuator constants are listed below:

Operating Pressure	8000 psi (55 MPa)
Piston Stroke (Total)	3.5 In. (8.9 cm)
Cylinder Bore	0.926 In. (2.3 cm)
Rod Diameter	0.748 In. (1.9 cm)
Piston Effective Area	0.234 In. <sup>2</sup> (1.5 cm <sup>2</sup> )
Force Output (Max.)	1870 Lb. (8.3 kN)
Piston Velocity (Max.)	5.5 In./Sec. (14 cm/s)
Actuator Length (Extended)	18.375 In. (46.7 cm)

Manufacturers and major components of the actuator were:

<u>Part No.</u>	<u>Description</u>	<u>Manufacturer</u>
8691-524001-101	Rudder Actuator Assembly	North American Aircraft Division-Columbus Plant, Rockwell International
8691-524001-051	Bypass Valve	" " "
S0 4262-03-21	Control Valve	Ronson Hydraulic Units Corporation Charlotte, North Carolina
99-D0234 (M/N 21-6-200)	Force Motor	Servotronics, Inc. Buffalo, New York
2000 HCD	Position Transducer	Schaevitz Engineering Camden, New Jersey

The actuator assembly is shown in Figure 2-8.



## 2.7

MICROCOMPUTER ASSEMBLY AND POWER SUPPLY

The microcomputer assembly is housed in an enclosed unit, and consists of the following subassemblies:

<u>Part No.</u>	<u>Nomenclature</u>
M68MM01A	Motorola Monoboard Microcomputer Module
M68MM05A	Analog-To-Digital (A/D) Converter Module
M68MM05C	Digital-To-Analog (D/A) Converter Module
M68MMCC05	Card Cage & Mother Board Assembly
EO H383246-11	Signal Conditioning Board
EO H383888	Fiber Optics Transmitter Board Assembly

The microcomputer module is a complete computer-on-a-board having all the processing and control required for a microcomputer-based system. It incorporates the MC 6800 MPU, 1 K of Random Access Memory (RAM), provisions for 4 K of Programmable Read Only Memory (PROM), timing and control, buffers, an Asynchronous Interface Adapter (ACIA) and two Peripheral Interface Adapters (PIA).

The A/D converter module consists of eight channels of A/D conversion of which four are utilized. The D/A converter module consists of four channels of D/A conversion of which three are utilized.

The signal conditioning board contains four channels of sensor signal conditioning and a relay driver that interfaces the microcomputer monitor output with the system control logic.

The dual channel fiber optic transmitter board was added for HOF CAS. Located in the microcomputer housing, the board contains a fiber optic photo diode and dropping resistor for each channel, to convert the microcomputer PWM output to optical form for transmission to the EDU. Two fiber optic cables, each 10 feet (3.05 m) long, interconnect the microcomputer and EDU. The 10 foot (3.05 m) cables simulate the length required to connect an actuator, with its electronic EDU located at the rudder, to the microcomputer located in the equipment bay. The microcomputer unit with the fiber optic cables attached is shown in Figure 2-9.

A separate power supply (Motorola P/N M68MMPS1) is provided to supply power to the microcomputer. The power supply converts single-phase, 115 VAC, 400 HZ to + 5 VDC and  $\pm$  12 VDC.

Additional information on the microcomputer is contained in Appendix A.

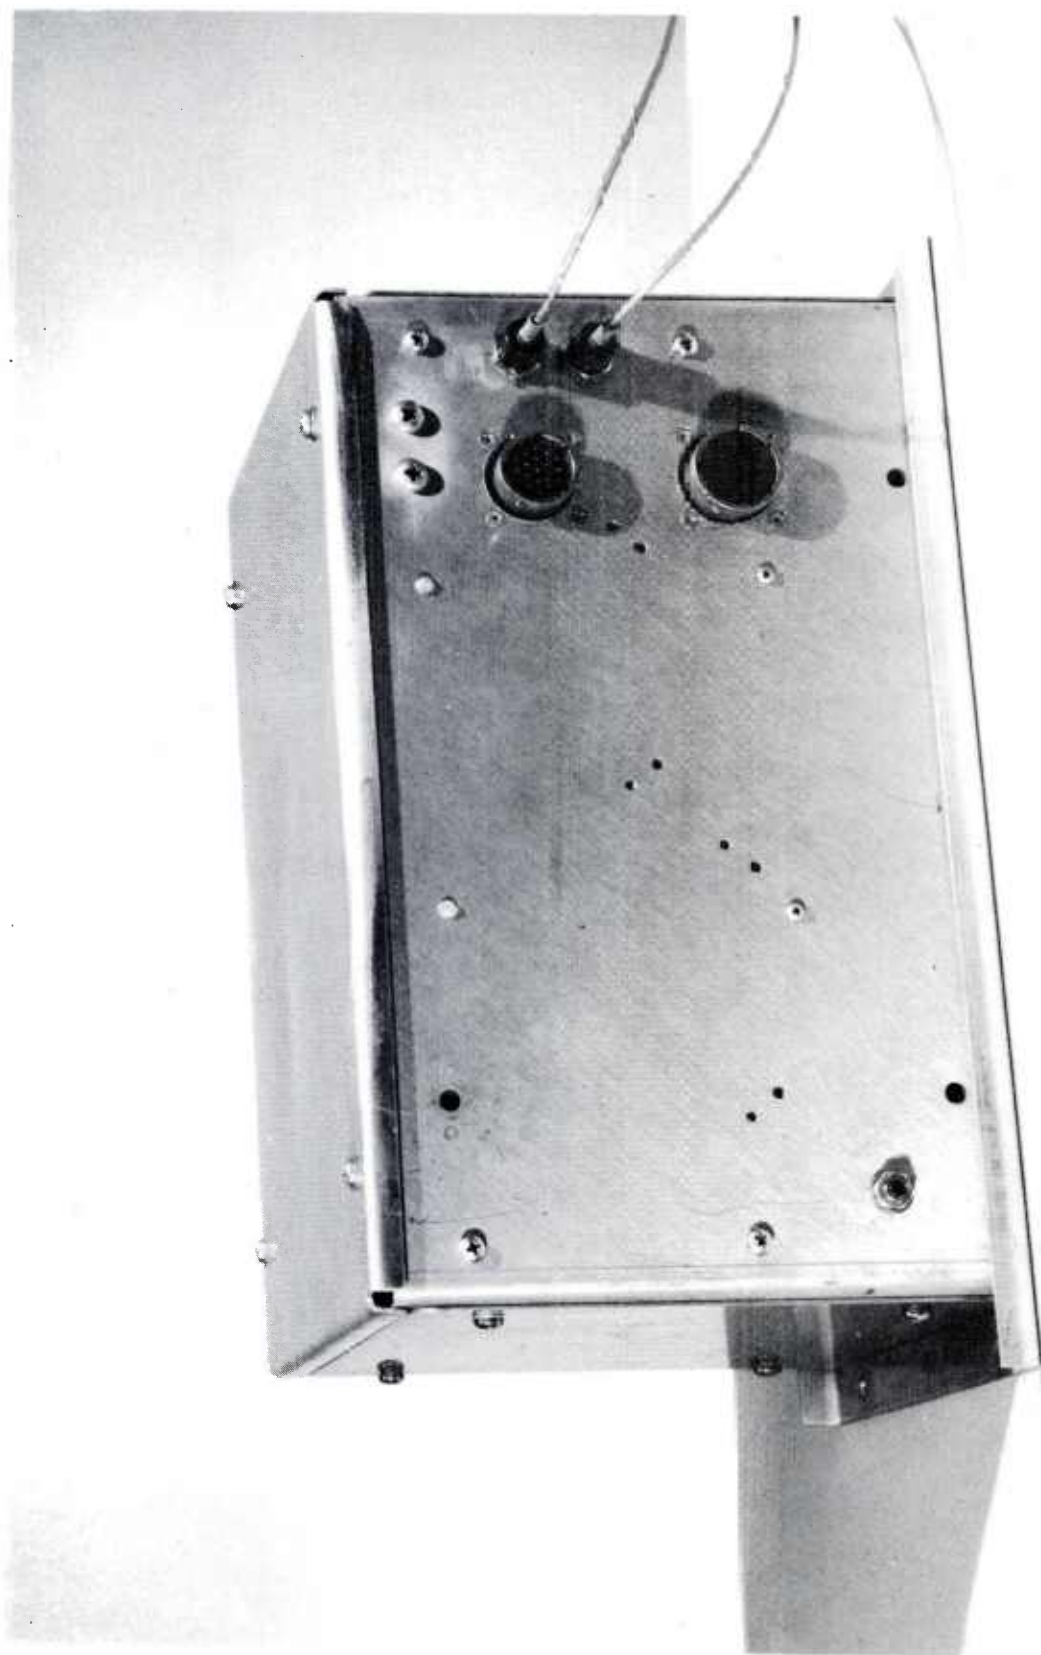


Figure 2-9. Microcomputer Unit With Fiber Optic Cables Attached

## 2.8        SOFTWARE DESCRIPTION

### 2.8.1      Function

The microcomputer software performs two basic functions; a command/feedback control function and a control monitor function.

The command/feedback control function sums the pilot command and rudder position signals to produce an output signal proportional to the difference to drive the actuator.

The control monitor function measures the level of error between the pedal command and the rudder actuator position feedback, and if a preset level is exceeded for a given period of time, the engage command will be removed. Actuator control will then revert to the ABU mode. A continuous check is also made on the transducer input A/D conversion hardware by comparing the two digital feedback signals with each other and in a similar manner comparing the digital pedal signals. Any differences exceeding preset levels for a given period of time will result in switching system control to the ABU mode.

The control monitor function was incorporated as the Motorola microcomputer is a single channel device which could generate a "hardover" command under certain failure conditions. The dual-channel redundancy of the ABU mode prevents a "hardover" command of the rudder even if a pedal transducer or rudder position transducer fails in a "hardover" condition.

### 2.8.2      Program Modules

The DFBL Microcomputer Program Flow Chart, Figure 2-10, illustrates the modular nature of the software and the sequence in which the modules function. The program modules were designed, coded, and initially checked as individual entities prior to being integrated.

Following is a brief description of the program modules:

Initialize - The Initialize module sets the Digital-To-Analog Converter (DAC) channel 4 to provide +5 VDC to hold in relay K1 (ref. Figure 2-3). The K1 relay, in turn, holds the DFBL ENGAGE switch in the engage position. This module also sets timing counters to ensure that the Monitor function does not immediately turn off the DFBL ENGAGE switch.

Input 1 - The Input 1 module, as the first in the repetitive loop, is used to start the PWM output signals. This is done by setting both DAC-1 and DAC-2 at +10 VDC. It then controls the A/D conversions of pilot command (CMD1) and rudder position (POS1). Inputs are scaled so that



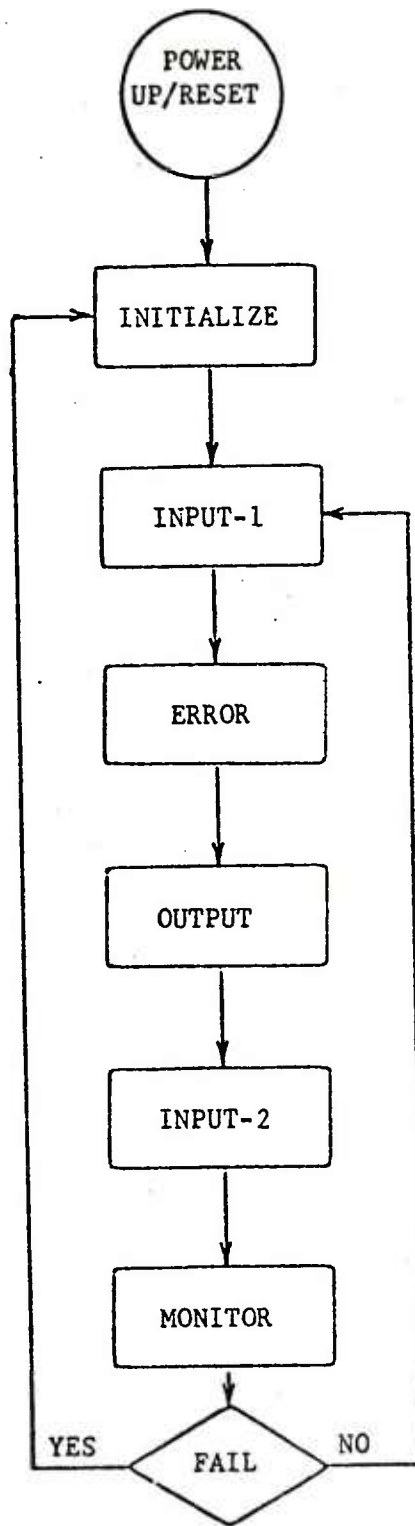


Figure 2-10. DFBL Microcomputer Program Flow Chart

full scale,  $\pm 12^\circ$  of rudder is  $\pm 5$  VDC, which is one-half of full range for the A/D channels. Since the force transducer that provides CMD1 is not mechanically or electrically limited to  $\pm 5$  VDC, a software limit is provided to set CMD1 at either  $\pm 5$  VDC, as appropriate, when that value is exceeded. Output of the A/D converter is a 12 bit word, proportional to the voltage.

Error - The error module performs a double precision subtract of CMD1 from POS1 and sets computer gain through a series of shifts. It then determines polarity of the error and transfers to the appropriate output module.

Output - The output module sets countdown timers that establish the duration of the plus and minus portions of the PWM output signal. It switches DAC-1 and DAC-2 to -10 VDC when the "positive" counters have timed-out. When the "minus" counters time-out, it transfers control to the Input 2 module.

Input 2 - The Input 2 module controls the conversion of CMD2 and POS2 and provides limits on CMD2 in the same manner as Input 1. CMD2 and POS2 are for use in the Monitor functions.

Monitor - The Monitor module compares the redundant pilot command and rudder position input signals. If a difference in either of  $1.5^\circ$  is detected for a period of 0.128 seconds, the program is set to deenergize the DFBL holding relay (K1 in Figure 2-3) and reverts control of the system into the ABU mode. The monitor also checks the magnitude of the error signal. If it exceeds  $1.5^\circ$  for 2 seconds, the DFBL holding relay is deenergized, and control of the system again reverts to the ABU mode. As long as the monitor does not detect an error, it transfers control back to the Input 1 module.

A listing of the flight program software is contained in Appendix A. The program was designed to function at a rate of 500 HZ, and occupies 462 bytes of the available 4096 bytes of PROM and 18 bytes of the 1024 bytes of "scratch pad" RAM. The PROM map is also contained in Appendix A.

## 2.9 HYDRAULIC SUPPLY

The hydraulic supply used for the laboratory testing utilized a variable displacement, axial piston, 3000 psi (21 MPa) pump. An accumulator of approximately 50 in<sup>3</sup> (820 cm<sup>3</sup>) was used in the supply line to minimize supply pressure transients. Complete instrumentation was provided to measure pressures and flows to the actuator and HPA. The hydraulic equipment is included in the laboratory setup pictorial, Figure 2-11.

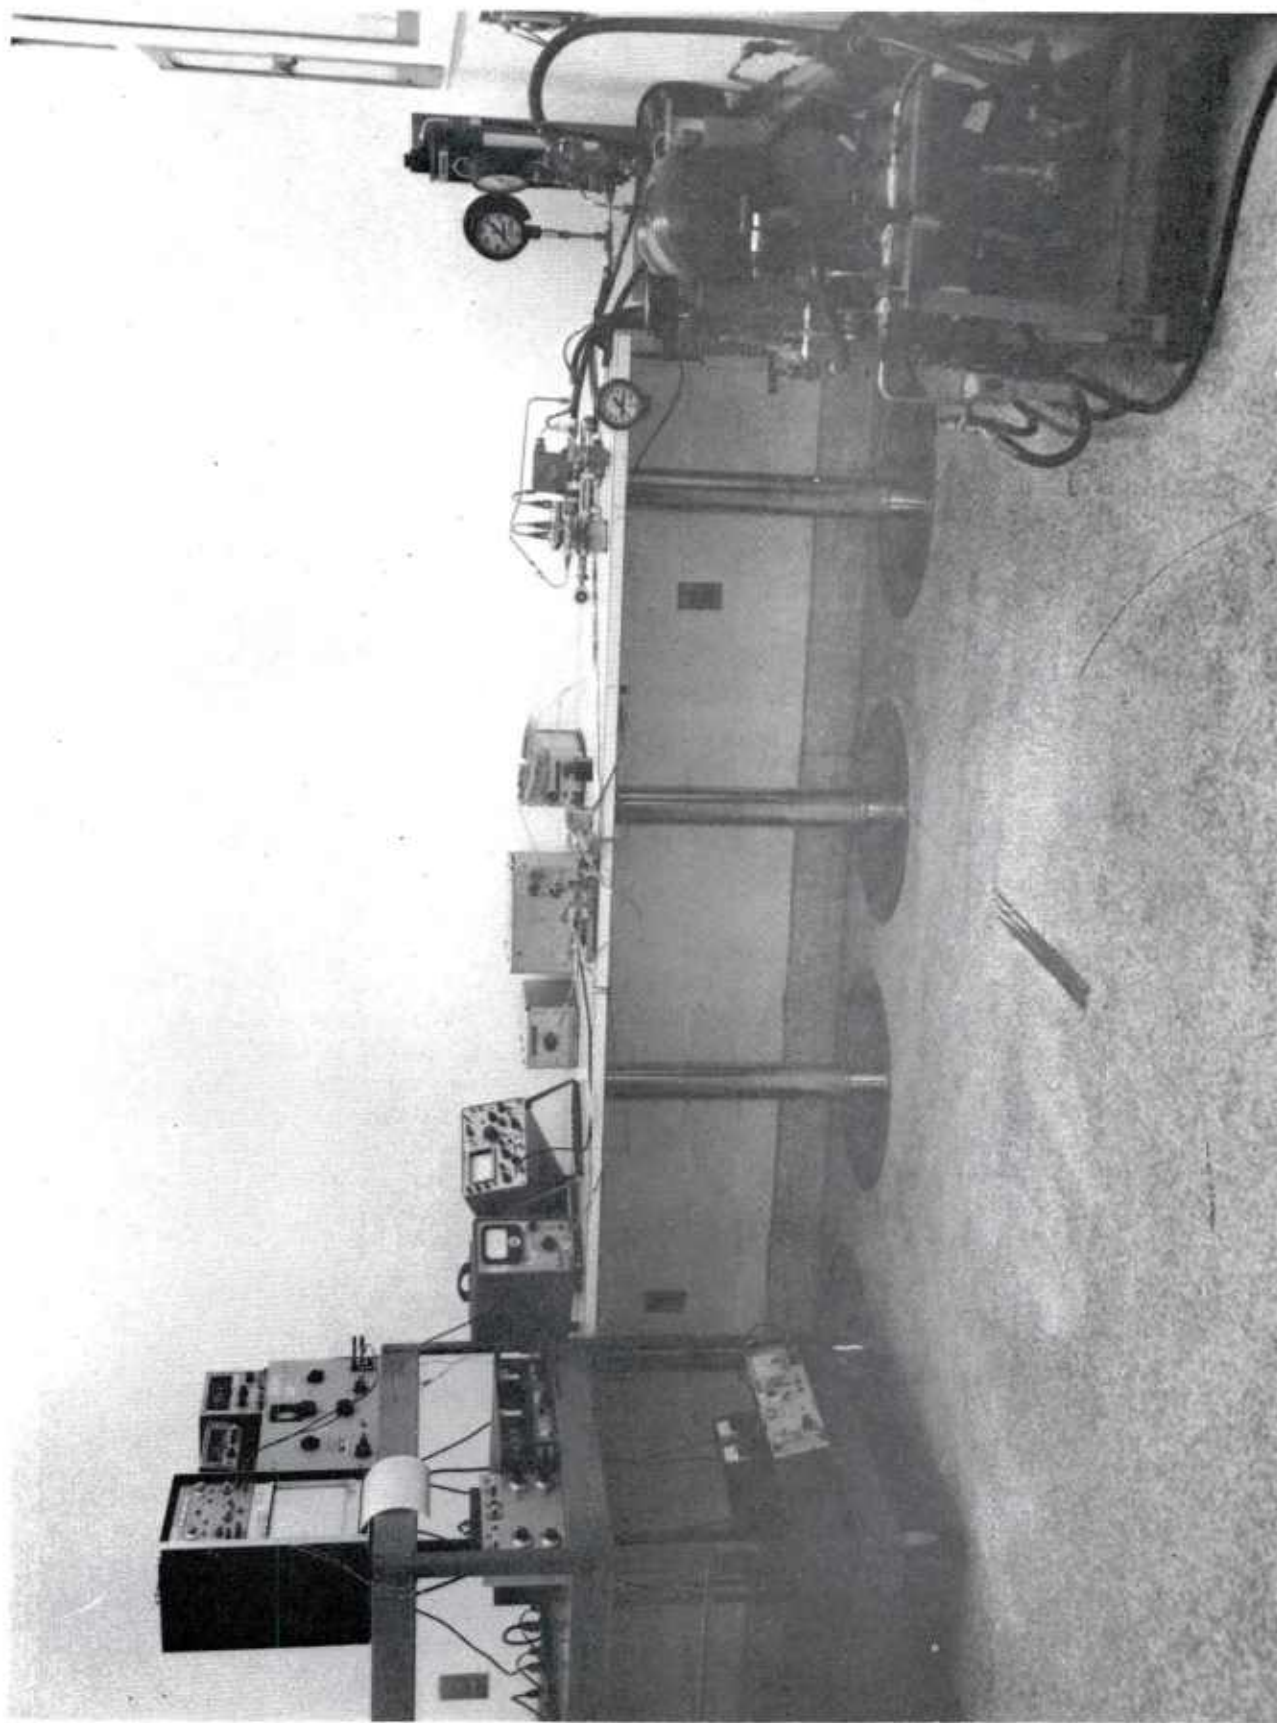


Figure 2-11. Laboratory Test Setup Pictorial

### 3.0 LABORATORY TESTS

#### 3.1 TEST OBJECTIVES

Laboratory tests were accomplished to integrate the HOF-CAS with the existing Phase VI digital AFCAS system, perform system functional tests, evaluate system performance and compatibility with the HOF-CAS modification, and to determine the effects of the HOF-CAS modification on system performance. Temperature tests were also performed to verify the equipment would function properly in the T-2C aircraft operating environment.

#### 3.2 TECHNICAL APPROACH

##### 3.2.1 Components

Laboratory tests were accomplished using the actual aircraft components to simulate flight conditions in preparation for flight testing of the system at a later date.

Included in the lab setup were the rudder LVDT feedback transducers, rudder actuator, EDU, microcomputer and associated power supply, hydraulic alternator, fiber optic link including emitters, detectors and fiber optic cables, and the switches and control relays used in the aircraft.

##### 3.2.2 Lab Setup

The lab wire harness was configured to simulate the aircraft wiring, and a terminal strip/interconnection board provided control, test points, and the interface between the wire harness, system components, and lab test equipment. The Lab Signal Simulator Box (LSSB) was included as part of the lab test setup, and provided simulated pedal force commands, LVDT feedback signals, and microcomputer PWM output signals during certain phases of system testing. The two fiber optic cables, connecting the microcomputer output to the EDU, were each 10 feet (3.05 m) in length simulating the actual aircraft cable length requirements. The portable lab hydraulic pressure source, described in paragraph 2.9, was used for all lab testing. A pictorial of the lab setup is shown in Figure 2-11.

#### 3.3 FUNCTIONAL TESTS

##### 3.3.1 Hydra-Powered Alternator (HPA)

3.3.1.1 HPA No-Load Tests - No-load tests were performed with the HPA connected to the lab hydraulic pressure source and test equipment as shown in Figure 3-1. Voltage, frequency, hydraulic flow and temperature were monitored for input pressures ranging from 500 to 3000 psi (3.5 to 21 MPa).

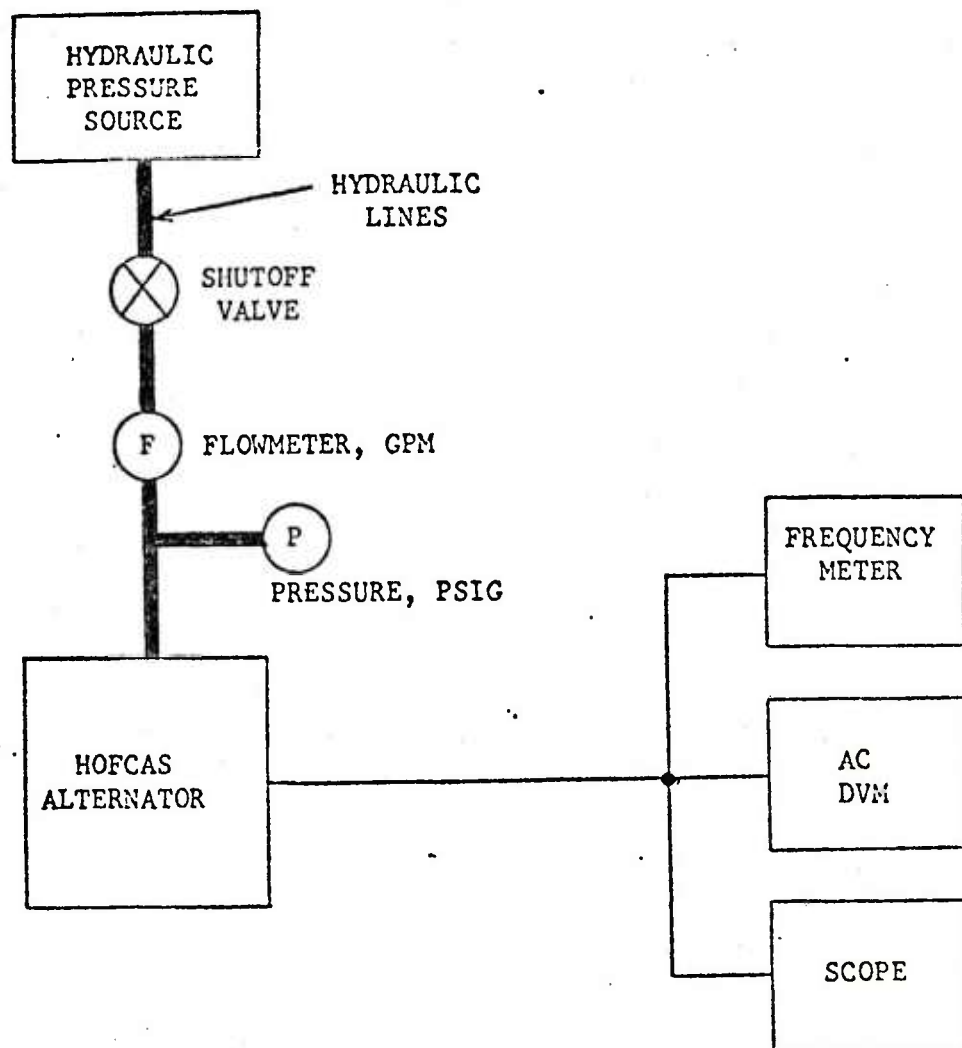


Figure 3-1. HPA No-Load Test Setup



The no-load HPA output voltage and frequency versus HPA  $\Delta P$  are plotted in Figure 3-2, and show a linear rise as inlet pressure is increased. With an HPA  $\Delta P$  of 3000 psi (21 MPa), the output voltage was 35.7 VAC at a frequency of 1187 HZ.

The HPA fluid flow and fluid outlet temperature versus HPA  $\Delta P$  are plotted in Figure 3-3, and show a flow of 0.73 gpm (2.8 L/min.) at 3000 psi (21 MPa) with a fluid temperature of 114°F (45.5°C).

The HPA output voltage waveforms were observed on the oscilloscope. The waveforms were nearly sinusoidal and were identical for all  $\Delta P$ 's except for increased voltage amplitude as  $\Delta P$  was increased. The 3000 psi (21 MPa) waveform is shown in Figure 3-4.

**3.3.1.2 HPA Load Tests, Constant Pressure** - Load tests were performed with the HPA connected as shown in Figure 3-5. The step-up transformer, added for HOF-CAS to match the HPA 26 VAC output to the EDU 115 VAC input power requirement, was connected to the HPA output and a variable resistance load connected to the transformer secondary. The HPA  $\Delta P$  was maintained at 3000 psi (21 MPa) for all load settings.

HPA output voltage and frequency versus HPA output current are plotted in Figure 3-6. The HPA output voltage decreased 33% (33.5 VAC to 22.1 VAC) and the frequency decreased 6% (1135 HZ to 1064 HZ) as the load was increased from 0 to full load.

The transformer secondary current and voltage versus HPA output current are plotted in Figure 3-7. The transformer secondary voltage decreased 35% (152.2 VAC to 98.5 VAC) as the load was increased from 0 to full load, nearly identical to the 33% decrease in HPA output voltage (transformer primary) for the same load settings.

The HPA output and transformer secondary voltage waveforms were photographed using the oscilloscope. The no-load waveforms, Figure 3-8, are nearly sinusoidal and are identical except for voltage amplitude. The full-load waveforms, Figure 3-9, show slight distortion at the peaks and are again identical except for voltage amplitude.

The HPA fluid discharge temperature remained at  $110 \pm 2^\circ\text{F}$  ( $43.3 \pm 1^\circ\text{C}$ ) and the HPA hydraulic flow was 0.73 gpm (2.8 L/min.) for the entire test. Load data taken at time 0 and again after 30 minutes of running time at full load showed no significant change.

**3.3.1.3 HPA Output Versus Hydraulic Pressure, Constant Load** - The HPA was connected to the lab hydraulic source and lab test equipment as shown in Figure 3-5. The load resistor was set for 1 ampere HPA output current at  $\Delta P$  of 3000 psi (21 MPa), and this resistance value held constant while reducing the HPA  $P$  to 2500 psi (17 MPa), in 100 psi (0.7 MPa) increments. The HPA fluid discharge temperature remained at  $113 \pm 2^\circ\text{F}$  ( $45 \pm 1^\circ\text{C}$ ) for the entire test.

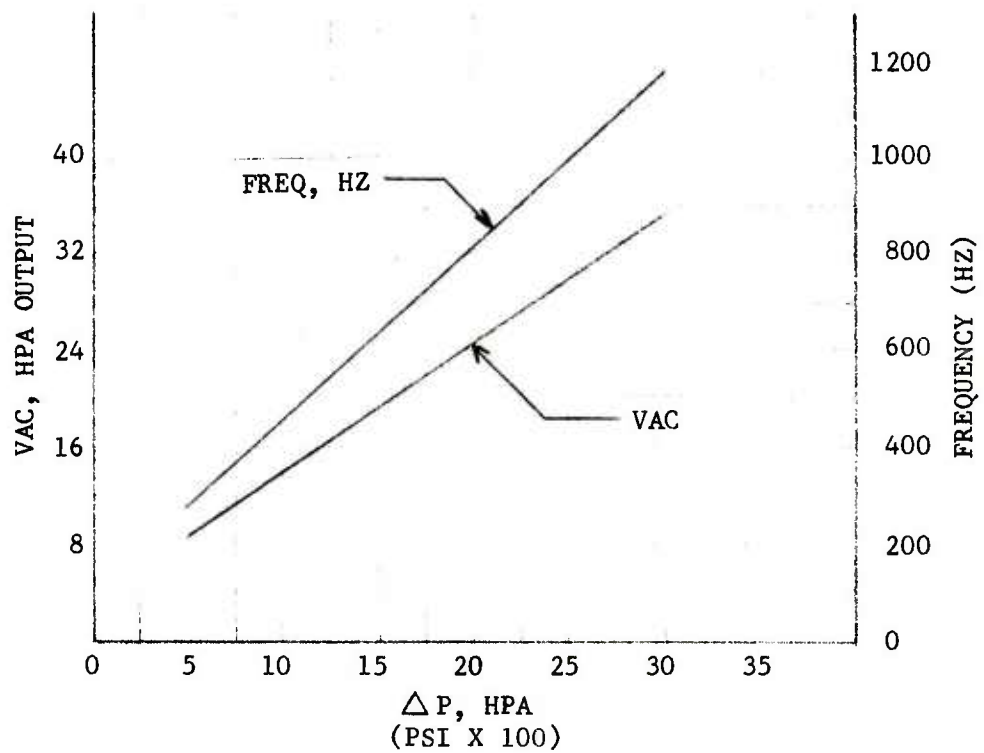


Figure 3-2. HPA VAC & Frequency Versus HPA  $\Delta P$ , No Load


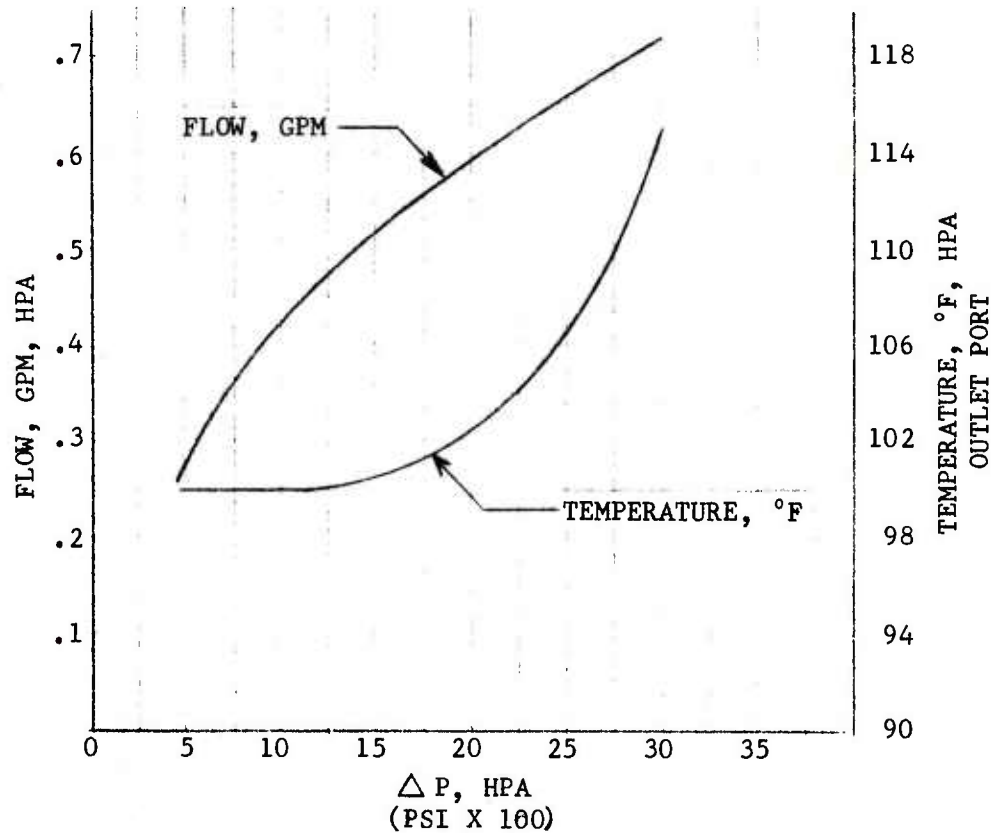


Figure 3-3. HPA Fluid Flow & Temperature Versus HPA  $\Delta P$ , No Load



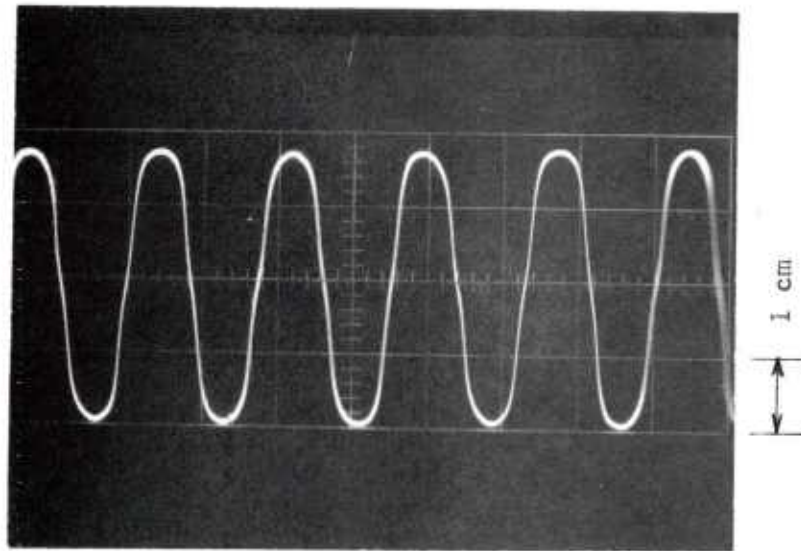

HPA  $\Delta P$  = 3000 PSI  
 20 V/cm, .5 ms/cm

Figure 3-4. No-Load HPA Output  
 Voltage Waveform

The HPA output (transformer primary) and transformer secondary output, in volt-amps (VA), versus HPA  $\Delta P$  are plotted in Figure 3-10, and show a 15% reduction in power output at 2500 psi (17 MPa)  $\Delta P$  compared to the nominal 3000 psi (21 MPa)  $\Delta P$  operating pressure.

The HPA hydraulic flow and frequency versus HPA  $\Delta P$  are plotted in Figure 3-11, and show an 8% reduction in hydraulic flow, 0.72 gpm (2.7 L/min.) to 0.66 gpm (2.5 L/min.), and a 14% decrease in frequency (1089 HZ to 936 HZ) as the HPA  $\Delta P$  is reduced from 3000 psi (21 MPa) to 2500 psi (17 MPa).

The transformer primary and secondary voltage waveforms at the HPA 2500 psi (17 MPa)  $\Delta P$  operating point are contained in Figure 3-12, and show a slight distortion at the peaks and are identical except for voltage amplitude.

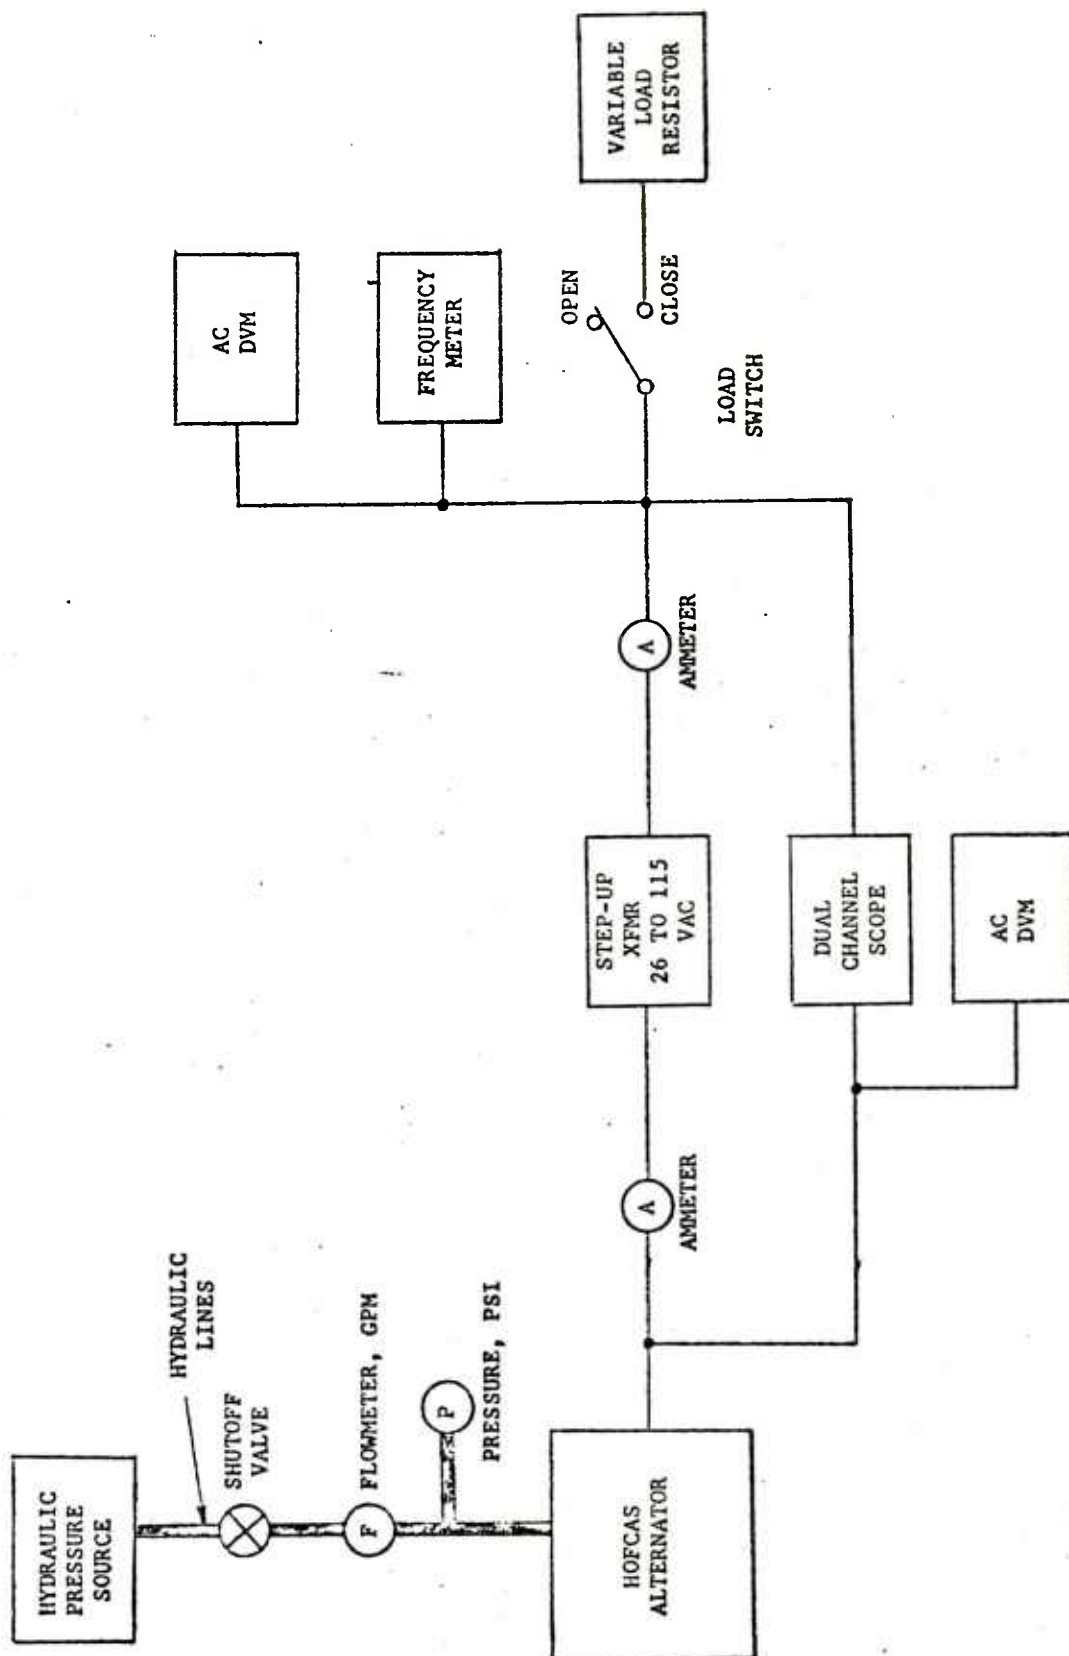


Figure 3-5. HPA Load Test Setup

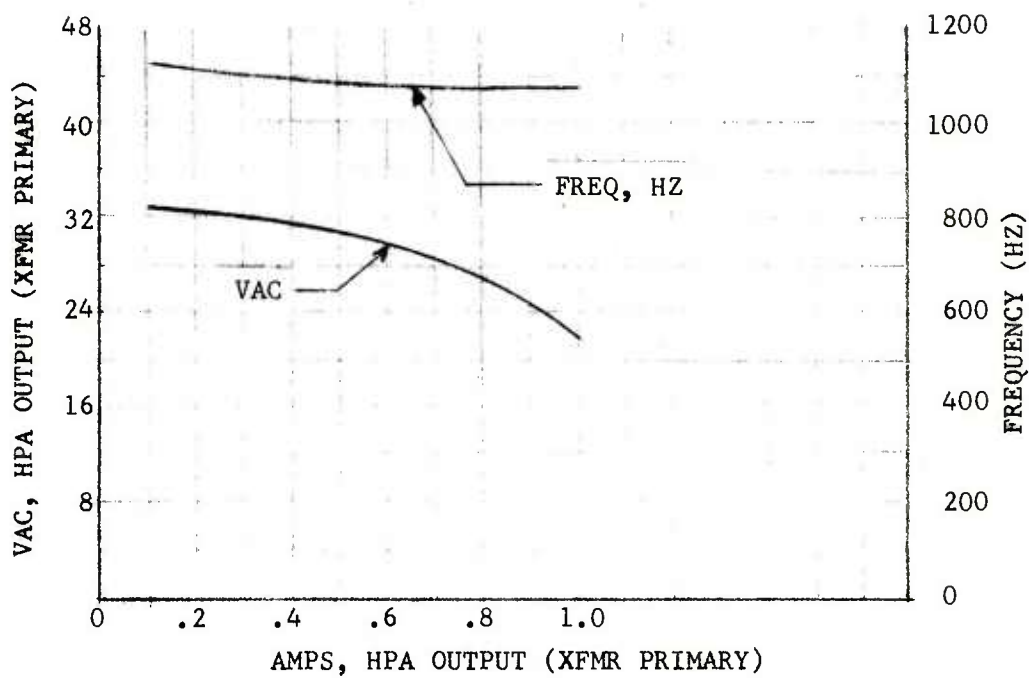


Figure 3-6. HPA VAC & Frequency Versus HPA Output Current



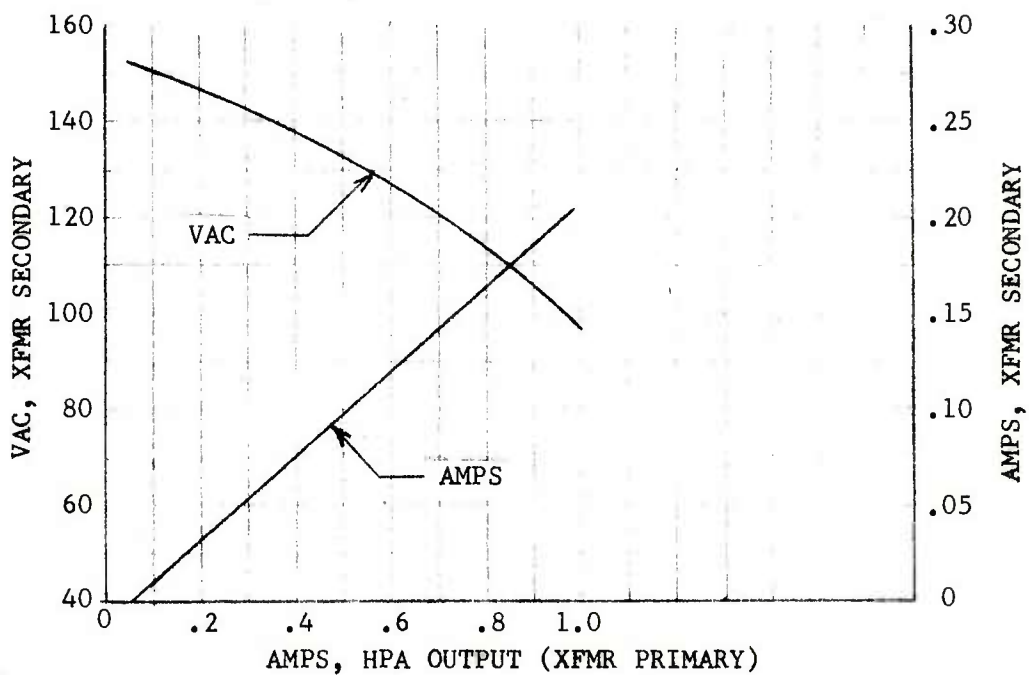


Figure 3-7. Transformer Secondary VAC & Current Versus HPA Output Current (Transformer Primary)

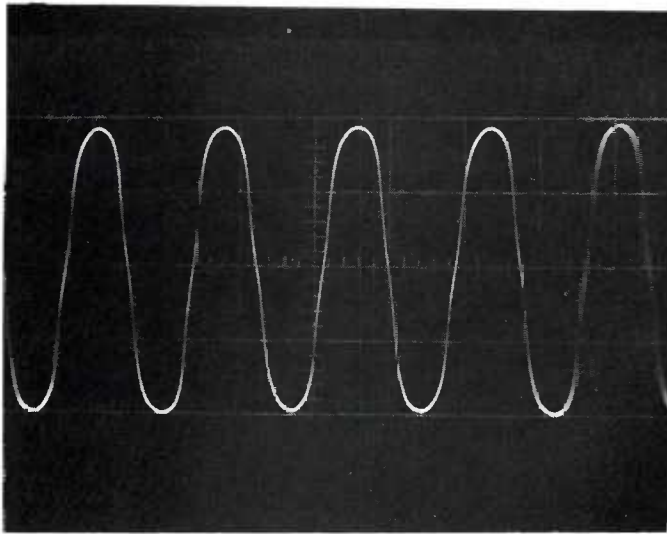


XFMR PRIMARY,  $I = .06a$   
20 V/cm, .5 ms/cm

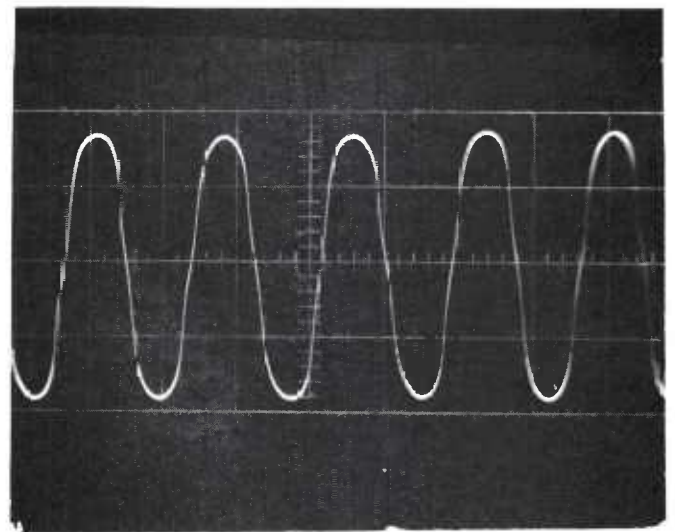


XFMR SECONDARY,  $I = 0a$   
100 V/cm, .5 ms/cm

Figure 3-8. Transformer Primary and Secondary No-Load Voltage Waveforms

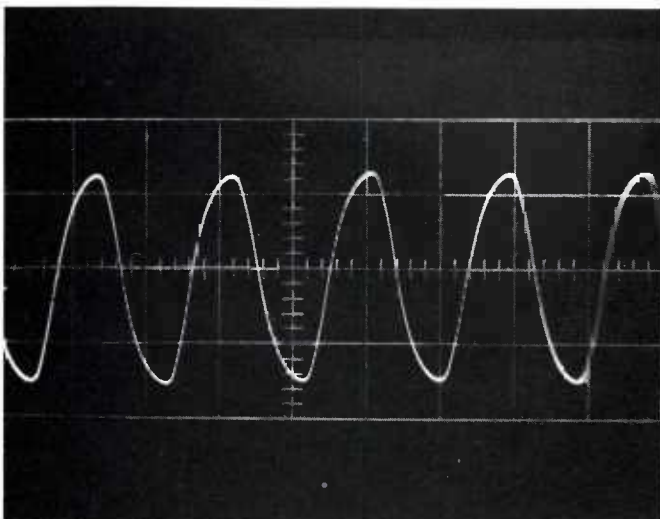

XFMR PRIMARY,  $I = 1.0a$   
20 V/cm, .5 ms/cm

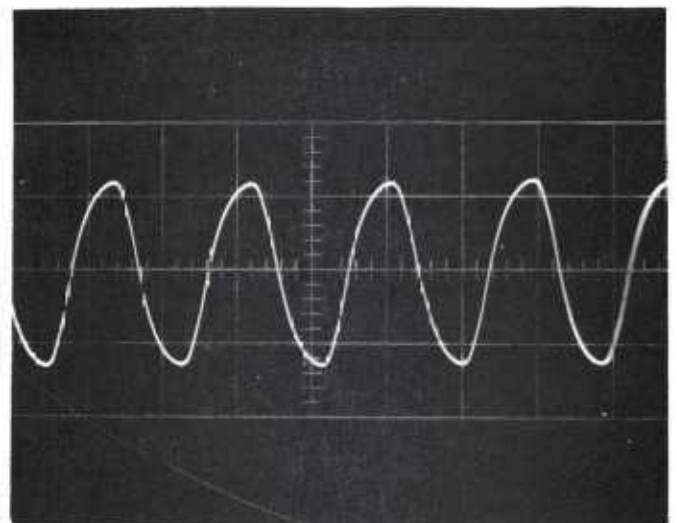

XFMR SECONDARY,  $I = .21a$   
100 V/cm, .5 ms/cm

Figure 3-9. Transformer Primary and Secondary Full-Load Voltage Waveforms

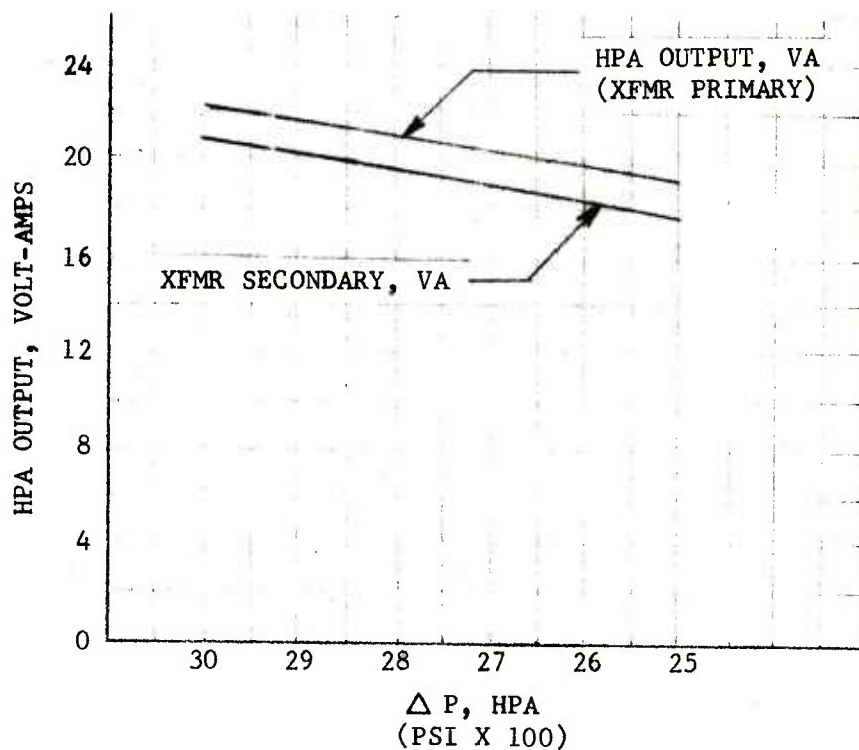


Figure 3-10. HPA VA Output Versus HPA  $\Delta P$ , Constant Resistive Load

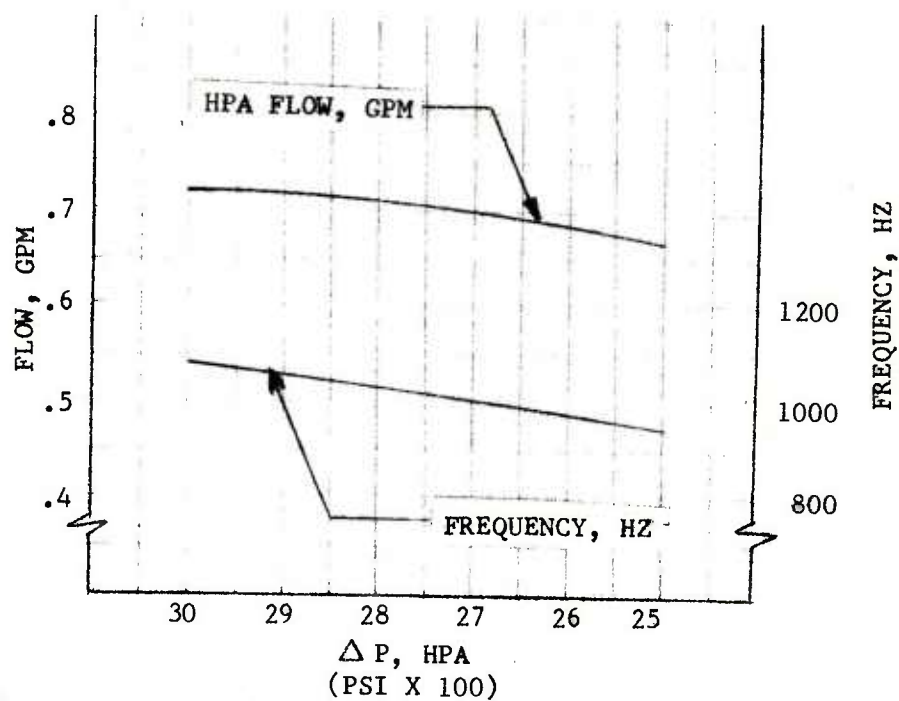


Figure 3-11. HPA Flow & Frequency Versus HPA  $\Delta P$ , Constant Resistive Load



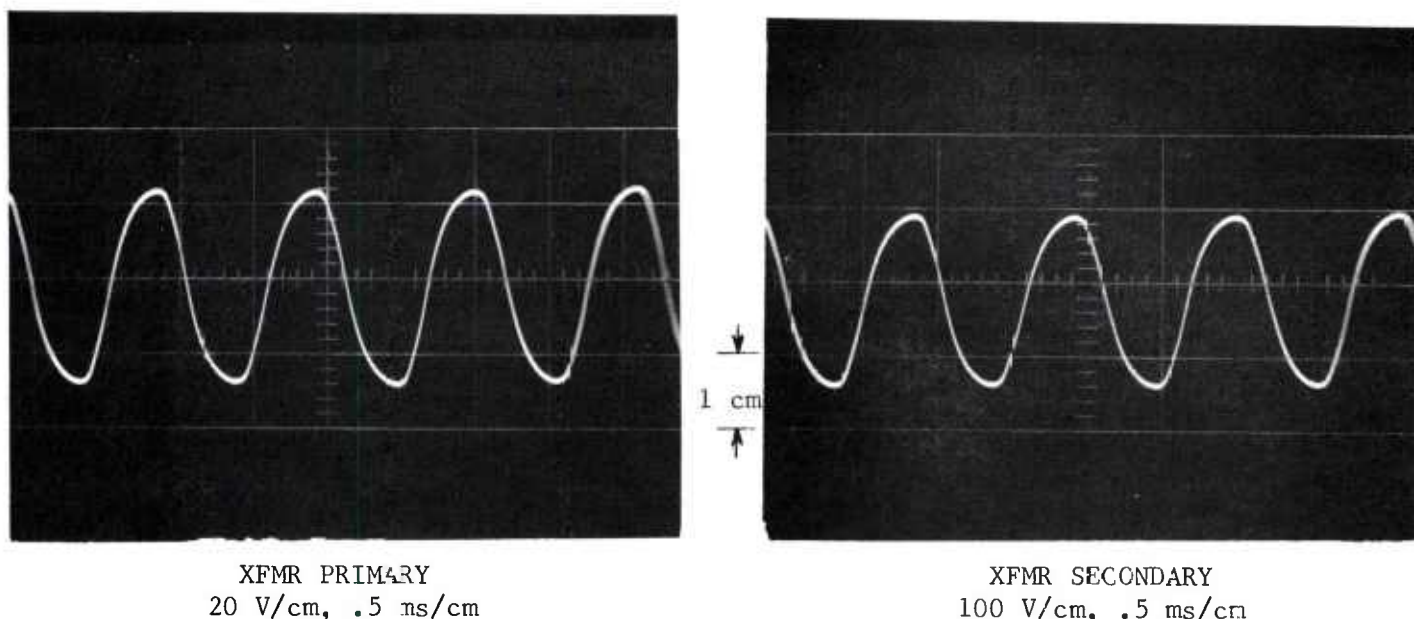


Figure 3-12. Transformer Primary and Secondary Voltage Waveforms,  
2500 PSI FPA  $\Delta P$

### 3.3.2 System Null and Gain Tests

3.3.2.1 Static Null, DFB<sub>L</sub> Mode, EDU 1000 HZ and 400 HZ Power - The system was connected as shown in Figure 3-13, with the Lab Signal Simulator Box (LSEB) connected to the microcomputer inputs, to obtain comparison data for HPA 1000 HZ and lab 400 HZ EDU power.

The microcomputer simulated force transducer (pedal command) and actuator feedback inputs were set to  $0 \pm .01$  VDC. The EDU was powered by HPA 1000 HZ, and the individual motor coil currents set for  $0 \pm .01$  amperes, using the R9, R10, R11, and R12 bias pots on the EDU as required. HPA voltage, fiber optic control link, and actuator motor coil current waveforms were photographed. The EDU input power was then switched to 400 HZ and without further adjustments the data points, including coil currents and waveforms, were repeated.

Results showed the channels 1 and 2 fiber optic loop transmitter input and receiver output waveforms were identical for both HPA 1000 HZ and lab 400 HZ EDU power (the channel 1 waveforms are contained in Figure 3-14).

The motor coil current readings and waveforms for 1000 HZ and 400 HZ EDU power were also identical. Coil #1 current waveforms are contained in Figure 3-15 (waveforms for all four coils were identical) and show the current is nearly zero, due to the inductance of the motor coils (the oscilloscope vertical gain for the current waveforms was set at 100 ma/cm for expanding the waveforms to facilitate comparison of results). The individual coil currents (rms values) were measured with an ammeter and are recorded in Table I.



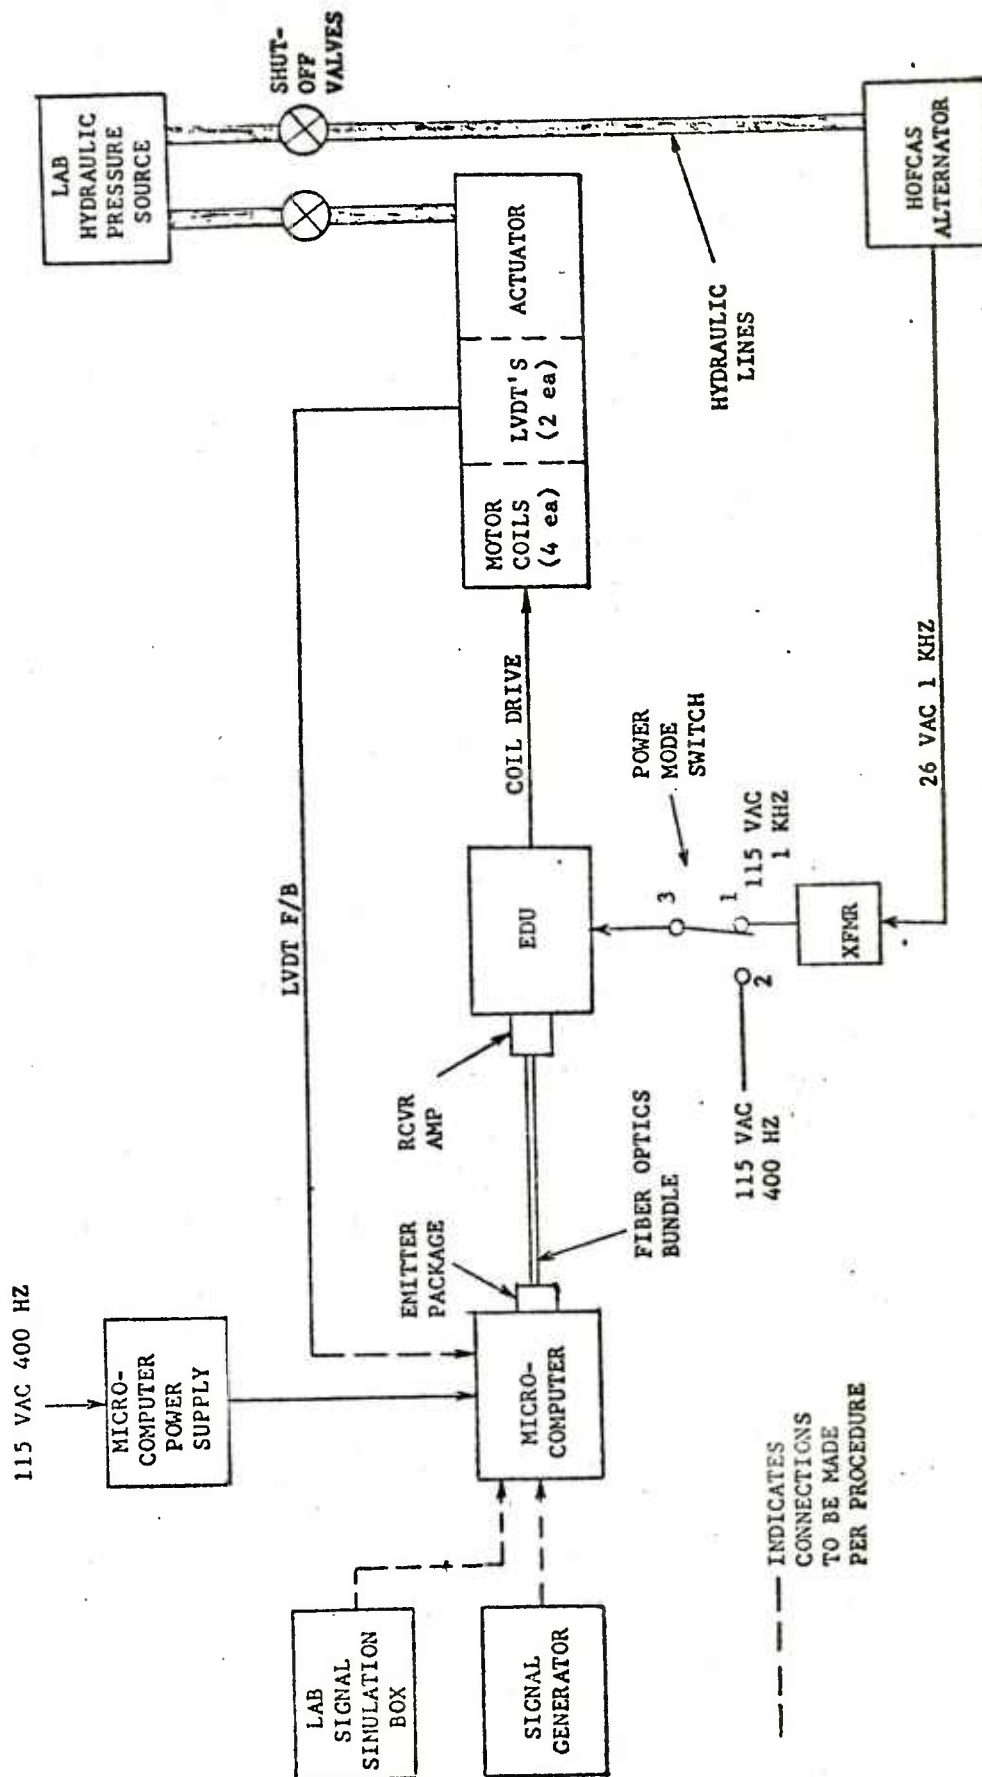


Figure 3-13. Null and Gain Test Setup

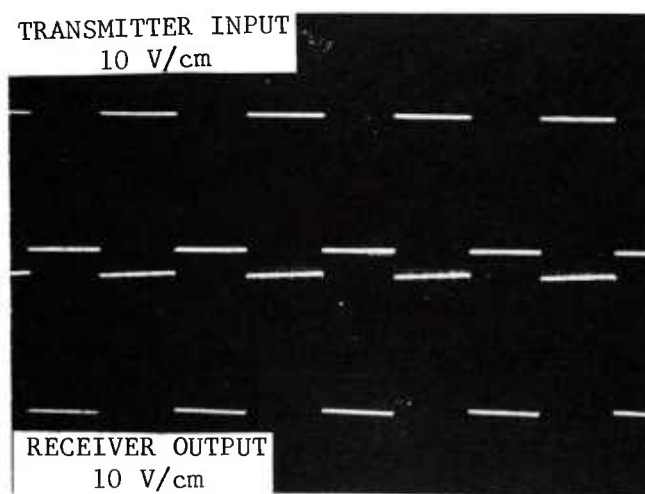


1000 HZ EDJ POWER

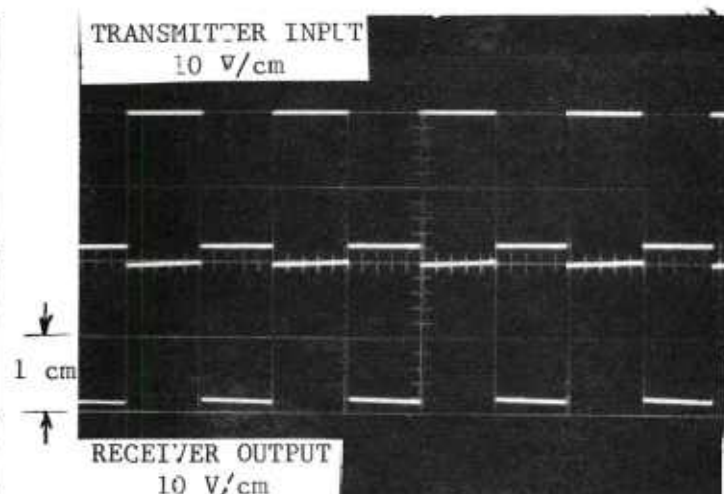


400 HZ EDU POWER

Figure 3-14. Fiber Optic Loop Transmitter Input and Receiver Output Waveforms, Channel #1

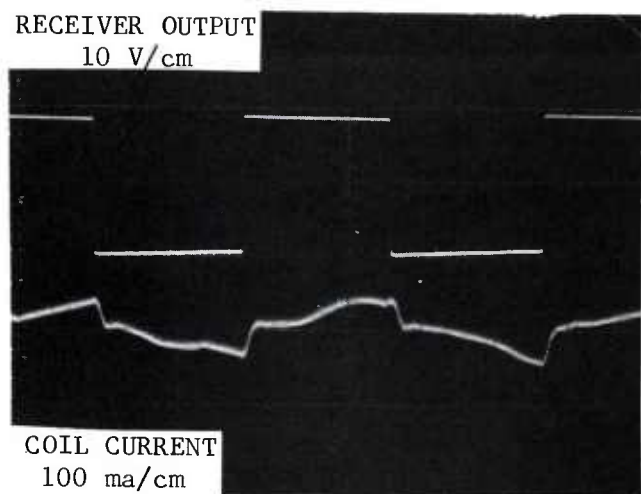

1000 HZ EDU POWER

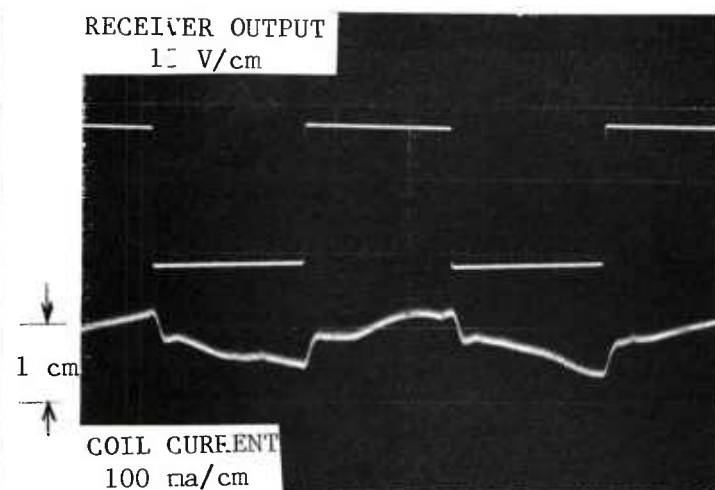

400 HZ EDU POWER

Figure 3-15. Fiber Optic Receiver Output and Motor Coil #1 Current Waveforms

Table I. Motor Coil Currents, System Null

MOTOR COIL NO.	MILLIAMPS, 1000 HZ	MILLIAMPS, 400 HZ
	EDU POWER	EDU POWER
1	18	17
2	17	15
3	12	8
4	-8	-10

3.3.2.2 Static Gain, Fiber Optic Control Loop Waveforms and EDU Input Voltage - The Lab Signal Simulator Box (LSSB) was connected to the microcomputer force transducer and LVDT feedback inputs (see Figure 3-13). The fiber optic control link waveform pulse width modulation and amplitude, and the EDU input voltage (1000 HZ, DFBL mode) were measured and recorded for various combinations of signal inputs. The resultant data is recorded in Table II. All PWM waveforms and amplitudes were within specified values. The fiber optic link input and output 88% and 12% modulation waveforms are shown in Figure 3-16.

The EDU 1000 HZ input voltage waveform for system null (50% pulse width modulation) is contained in Figure 3-17. Figure 3-17a shows the EDU input with the oscilloscope vertical deflection set at 100 V/cm. Figure 3-17b shows the same EDU waveform and the control link drive signal to the EDU (50% modulation) with the scope vertical gain for the EDU input set at 200 V/cm, to permit simultaneous display of both waveforms. The EDU input waveform tends to distort to a pseudo square wave due to the inductive load of the direct drive torque motor.

The 1000 HZ EDU input voltage readings are included in Table II for information only since the Dana Model 5400 AC digital voltmeter used to obtain the readings is an average detecting instrument and is accurate for sinusoidal waveforms only.

3.3.2.3 Position Gain, DFBL Mode - The rudder actuator LVDT feedback and the LSSB pedal command outputs were connected to the microcomputer (see Figure 3-13) and the rudder actuator was manually positioned to the midstroke (null) position. With actuator hydraulic pressure OFF and the system energized in the DFBL mode (1000 HZ EDU power), the actuator feedback linkage was adjusted for  $0 \pm .01$  VDC LVDT output. With hydraulic pressure applied to the actuator, actuator piston travel (with respect to the null position) was then recorded for various pedal command inputs. All readings were within specified values, and are recorded in Table III of this report.

Table II. Fiber Optic Link Input/Output Signals Versus Simulated LVDT and Pedal Command Inputs

LSSB SIMULATED INPUTS		% MODULATION REQ'D, $\pm 10\%$	FIBER OPTIC XMTR INPUT		FIBER OPTIC RCVR OUTPUT		XFMR SECONDARY (EDU INPUT) VOLTAGE, VAC
MICROCOMPUTER, LVDT INPUT, VOLTS DC	MICROCOMPUTER PEDAL COMMAND INPUT, VOLTS DC		% MODULATION MEASURED	PK TO PK AMPL (20 $\pm$ 2V REQ'D)	% MODULATION MEASURED	PK TO PK AMPL (20 $\pm$ 2V REQ'D)	
0	0	* 50	50	19	50	19	142.6
4.37	0	* 88	88	19	88	19	129.6
4.37	-1.0	50	48	19	48	19	142.6
0	-1.0	* 12	12	19	12	19	132.7
0	1.0	88	88	19	88	19	133.1
-4.37	1.0	50	50	19	50	19	142.0
-4.37	0	12	12	19	12	19	133.3

\*PHOTOGRAPH WAVEFORMS FOR THESE SETTINGS WITH SCOPE CAMERA.



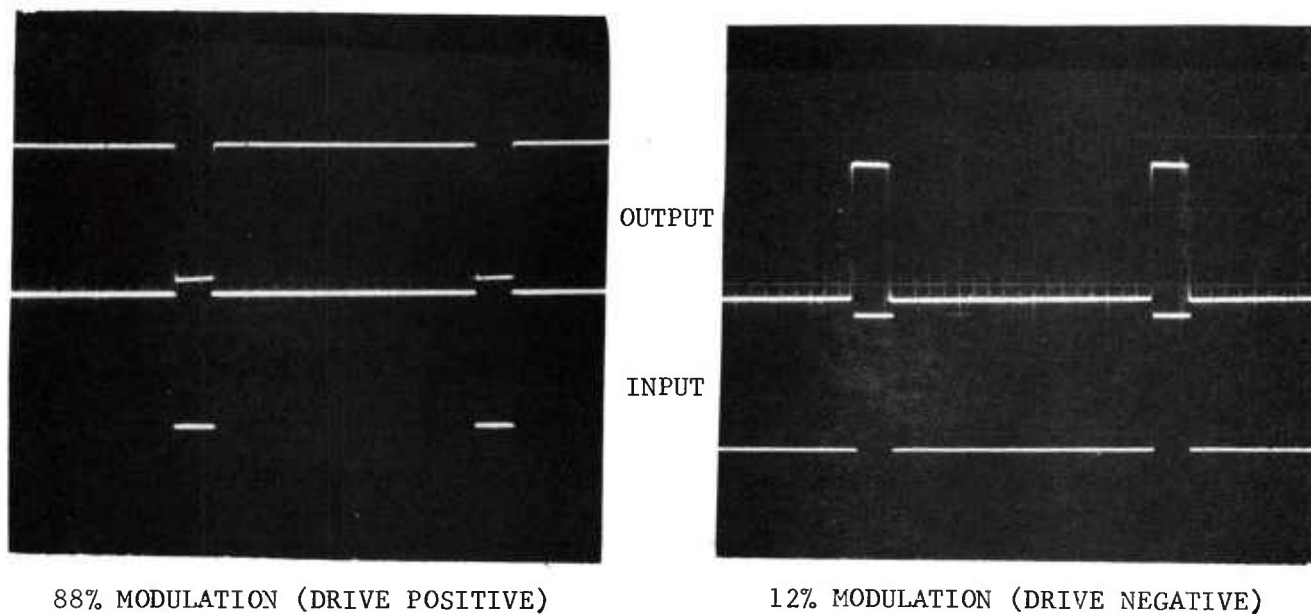


Figure 3-16. Fiber Optic Link Input/Output Waveforms, Static Gain Test

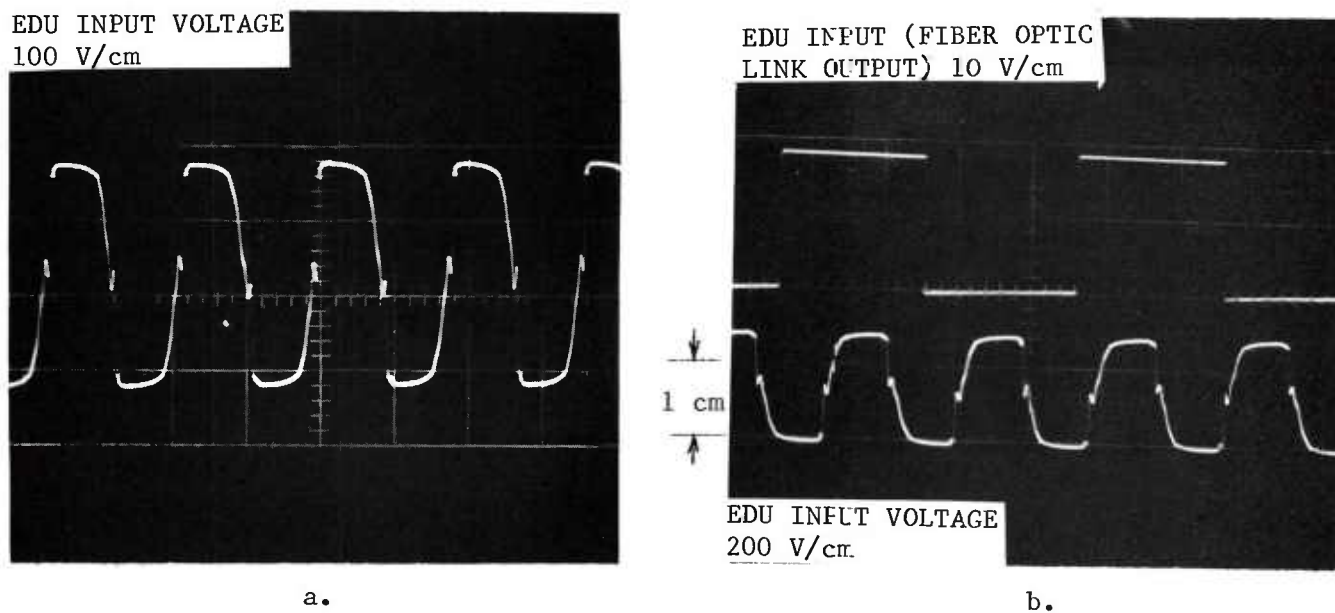


Figure 3-17. EDU Input Voltage Waveform, System Null  
(Microcomputer PWM Output @ 50% Modulation)

Table III. Actuator Position Versus Pedal Command

LSSB PEDAL COMMAND OUTPUT, VDC	ACTUATOR POSITION, INCHES	
	<u>DESIRED</u> (+5%)	<u>MEASURED</u>
0	0 (MIDSTROKE POSITION)	0 (MIDSTROKE POSITION)
1.7	1.5 (EXTEND)	1.52 (EXTEND)
-1.7	1.5 (RETRACT)	1.56 (RETRACT)
2.0	1.75 (EXTEND)	1.74 (EXTEND)
-2.0	1.75 (RETRACT)	1.80 (RETRACT)
0	0 (MIDSTROKE POSITION)	0 (MIDSTROKE POSITION)

#### 3.4 INTEGRATION TESTS

##### 3.4.1 System Response

The bandpass requirements and therefore the system loop gain were established by T-2C aircraft dynamic requirements for the integration tests. System dynamic response tests were performed to demonstrate that the HOF CAS operational modes meet these dynamic requirements and are satisfactory for controlling the rudder of the T-2C aircraft. The lab test setup, Figure 3-18, was configured to provide either HPA 1000 HZ or simulated aircraft 400 HZ power for the EDU in the HOF CAS DFBL and ABU modes, and a DFBW mode of operation. A function generator provided sinusoidal and step input signals to the system force transducer inputs and a 2-channel strip chart recorder was used to record the function generator output and rudder actuator feedback signal.

3.4.1.1 System Frequency Response, DFBL Mode, Flight Gain Configuration - DFBL mode system frequency response tests, with the system in the flight gain configuration, were performed for both HPA 1000 HZ and 400 HZ EDU power inputs.

System frequency response for 400 HZ power input to the EDU is contained in Figure 3-19, with the 3 db point occurring at 3.6 HZ. Response for HPA 1000 HZ power input to the EDU is contained in Figure 3-20, with the 3 db point occurring at 2.5 HZ. The lower response for the HPA 1000 HZ EDU input is due to loading effects of the EDU reducing the HPA output voltage.



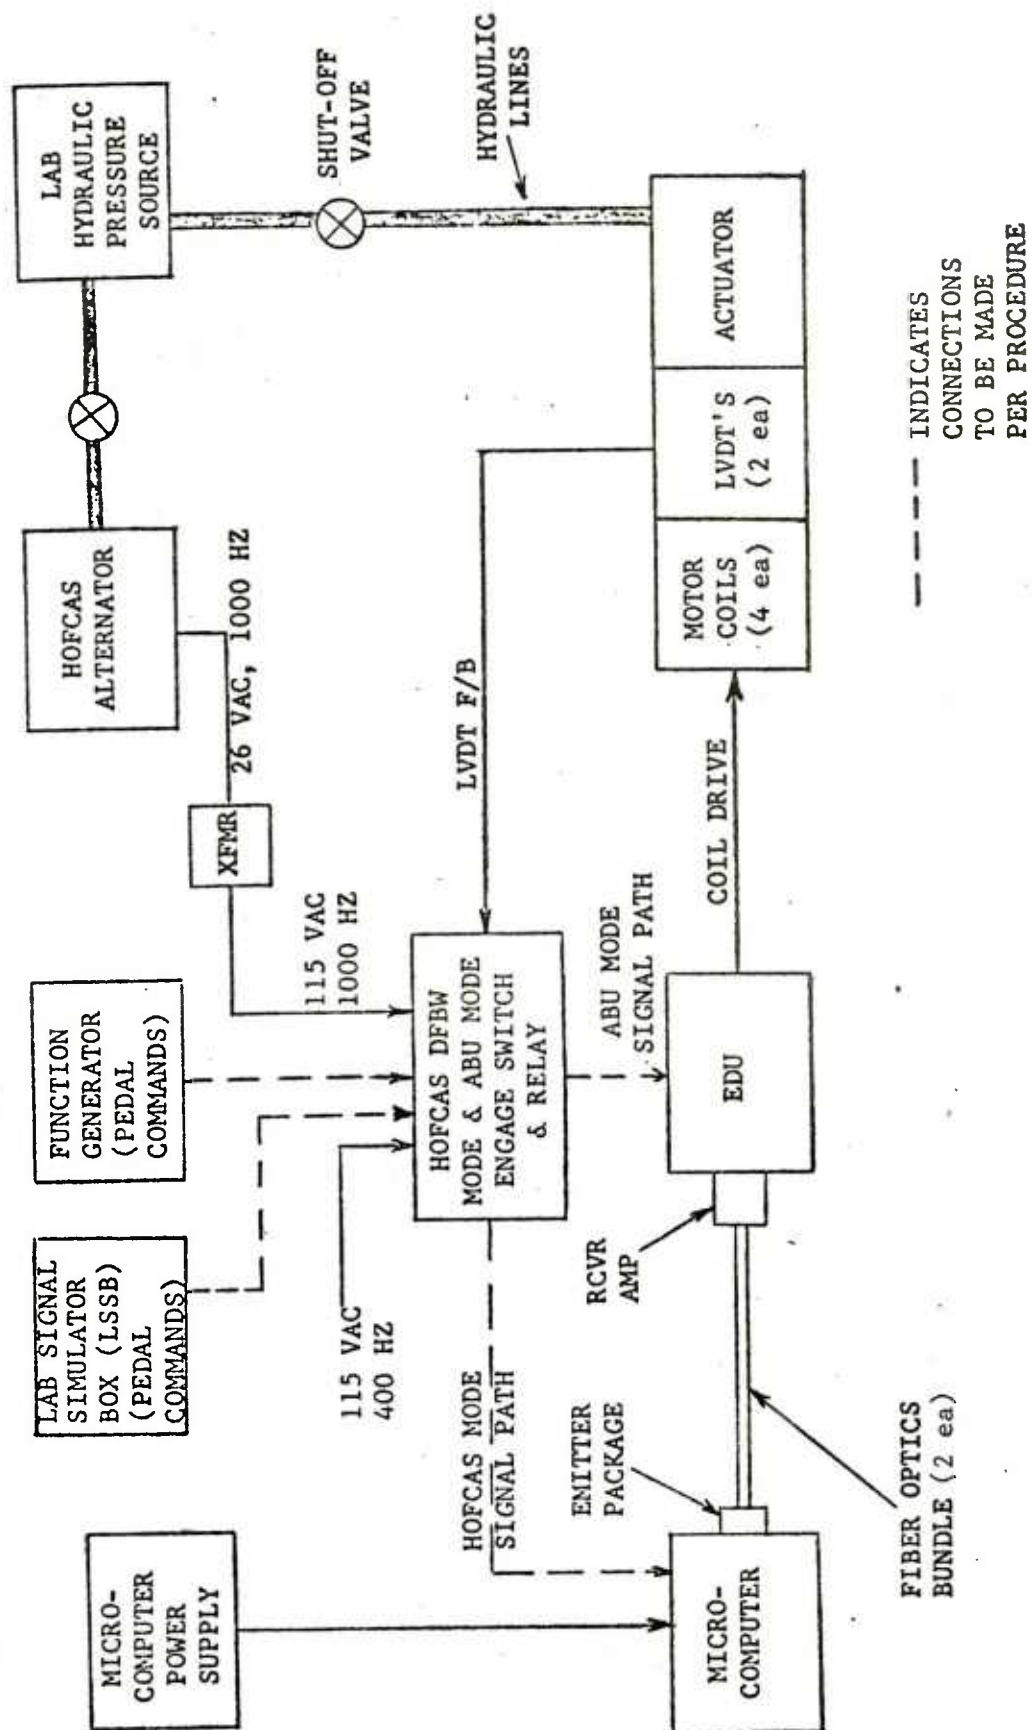


Figure 3-18. System Dynamic Test Lab Setup

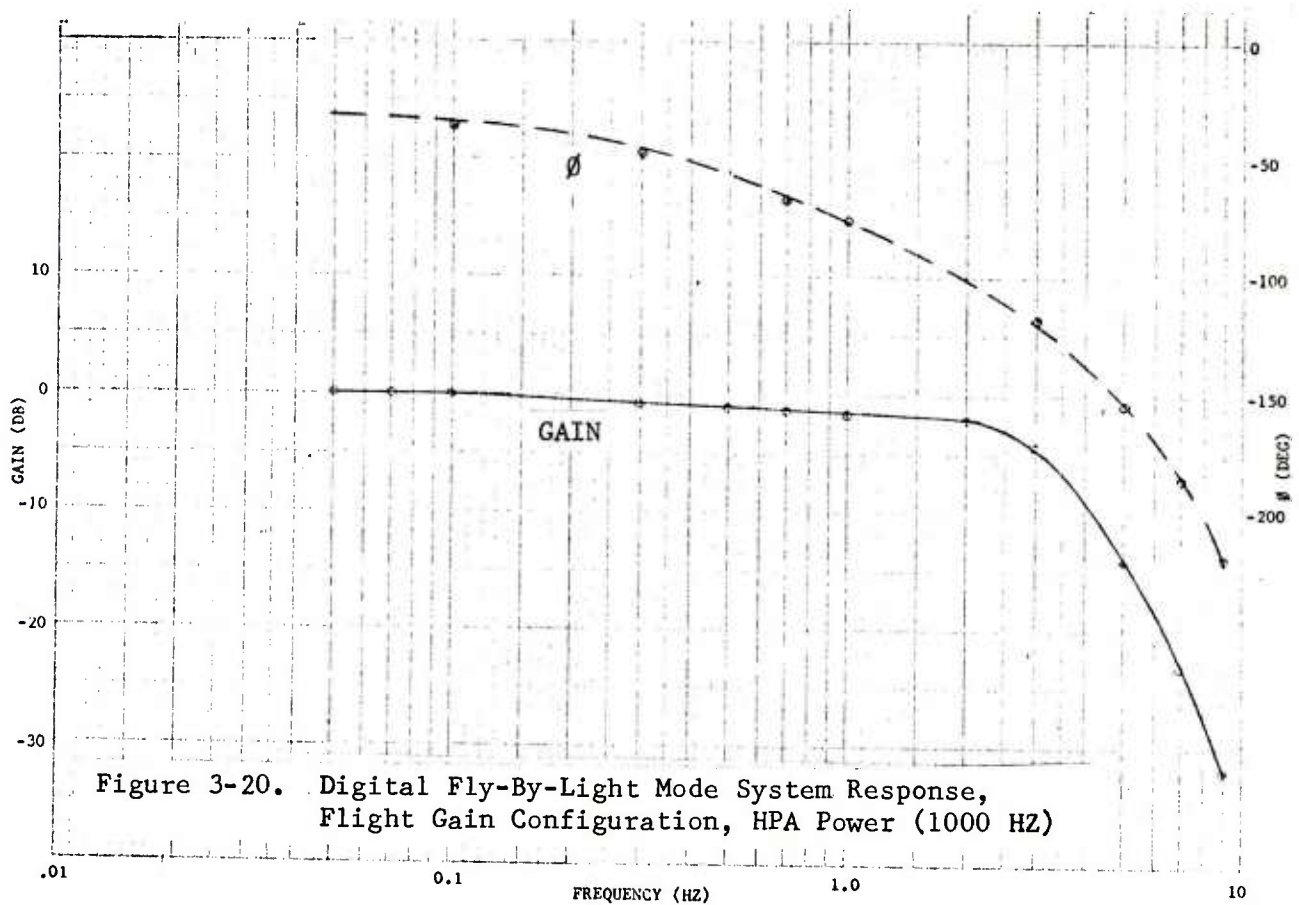

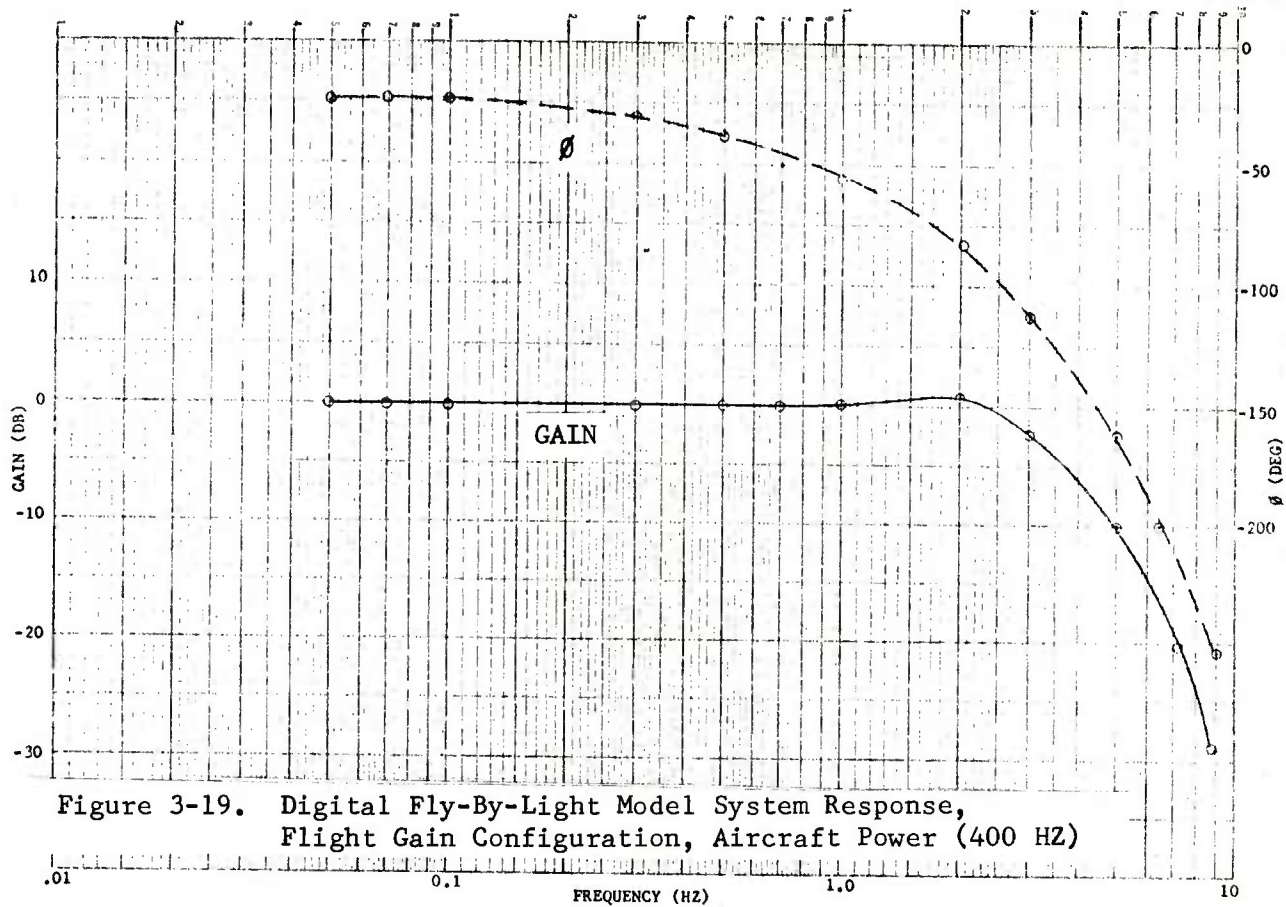

3.4.1.2 System Frequency Response, Digital Fly-By-Wire Mode - System frequency response tests were also performed for a Digital Fly-By-Wire test configuration. This configuration was achieved by direct wiring the EDU to the microcomputer and provides comparison frequency response data for the optical control link.

The microcomputer Digital-To-Analog Converter (DAC) Pulse-Width-Modulated (PWM) outputs were disconnected from the fiber optic link transmitter assembly, and the fiber optic control link outputs were disconnected from R23 and R24 inputs to operational amplifiers U5 and U6, EDU channels 1 and 2 (reference Figure 2-3). The microcomputer DAC output was then directly wired to resistors R23 and R24, channels 1 and 2, in the EDU to configure the system in the Phase VI AFCAS DFBW mode.

Response tests were performed with the system in the flight gain configuration for both HPA 1000 HZ and aircraft 400 HZ EDU power. The EDU 400 HZ response curve is contained in Figure 3-21, with the 3 db point at 3.5 HZ. The EDU 1000 HZ response curve is shown in Figure 3-22, with the 3 db point at 2.6 HZ. Results were the same as the DFBL mode system response (reference Figures 3-19 and 3-20) and show no degradation due to the incorporation of the fiber optic loop into the system.



3.4.1.3 System Step Response, DFBL and DFBW Modes, Flight Gain Configuration - System step response tests were performed for the HOF CAS DFBL and the DFBW modes of operation, in the flight gain configuration (modification of the system to obtain DFBW mode response is included in paragraph 3.4.1.2 of this report). A lab function generator supplied a .2 HZ square wave input to the system force transducer input, with the signal amplitude set for  $\pm .4$ " actuator travel.

Step response for the DFBL mode is contained in Figure 3-23, and the DFBW mode is contained in Figure 3-24. Actuator LVDT feedback waveforms for both modes are essentially the same, showing no degradation in system operation with the fiber optic loop in the circuit (DFBL mode). The actuator LVDT feedback waveforms for HPA 1000 HZ EDU input power are slightly degraded compared to lab 400 HZ EDU power due to loading effects of the EDU on the HPA output.

#### 3.4.2 EDU Power Supplies

The  $\pm 15$  VDC EDU channels 1 and 2 power supply outputs were monitored during system operation in the DFBL mode (1000 HZ EDU power) at system null (50% PWM EDU input signal). The corresponding readings are contained in Table IV and show the HPA voltage had no effect on the EDU power supplies.



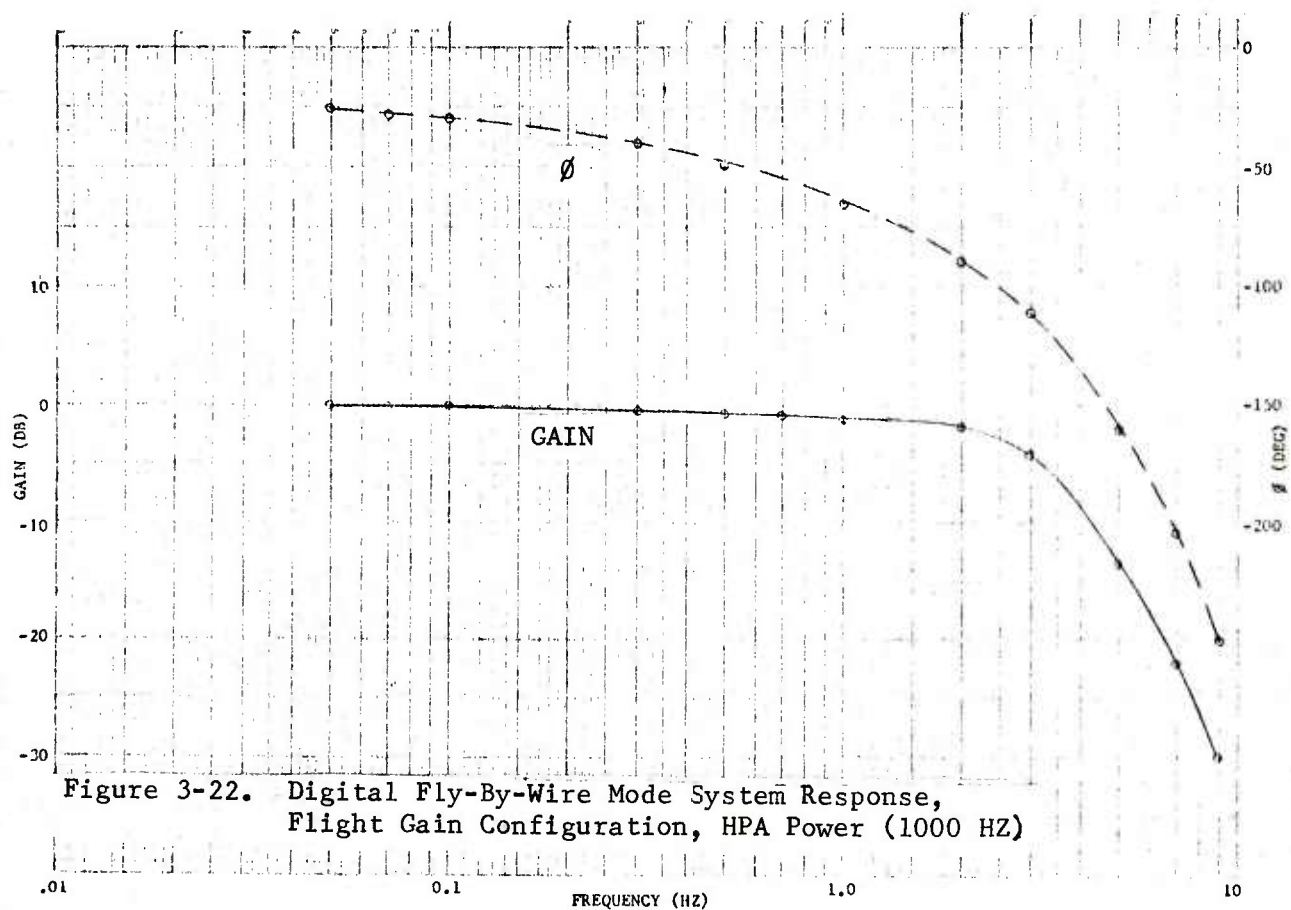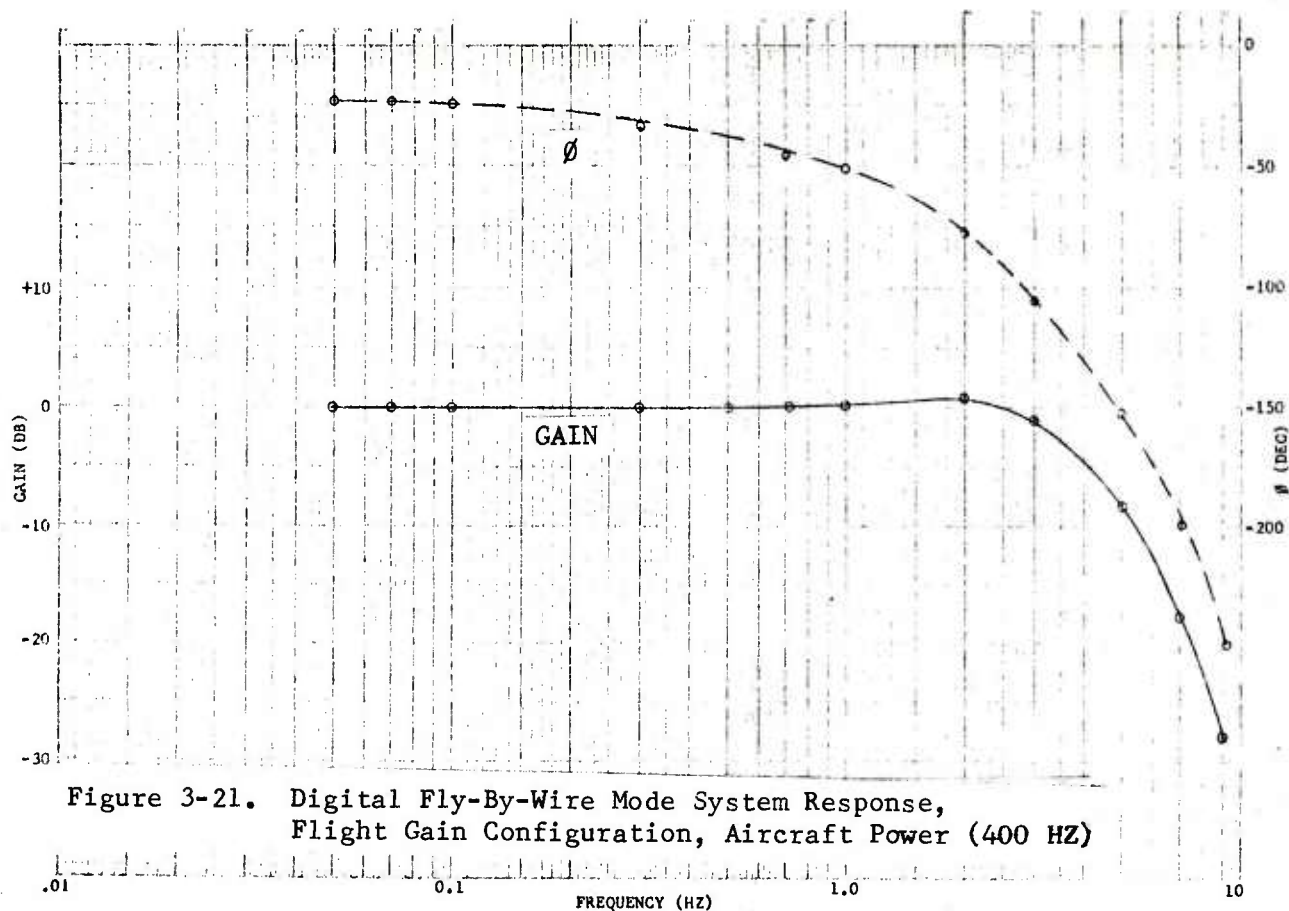

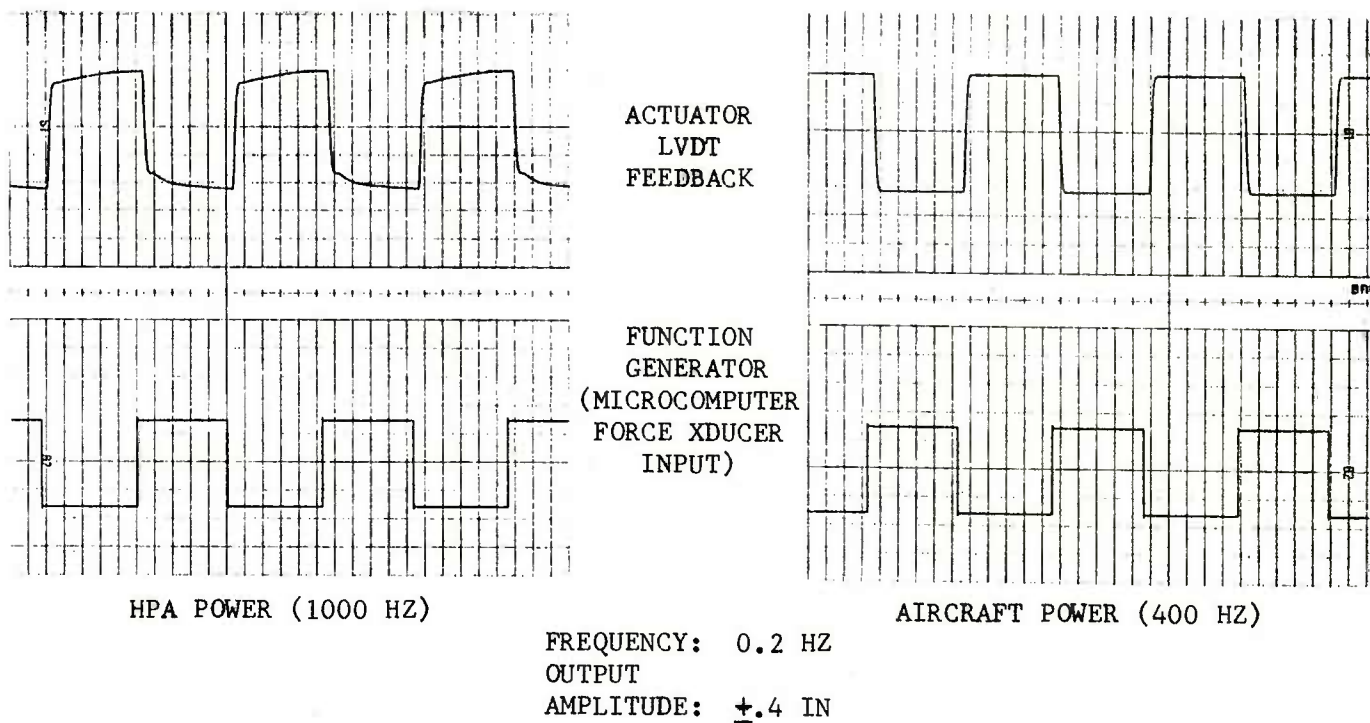


Figure 3-23. Step Input Response, Flight Gain Configuration, DFBL Mode

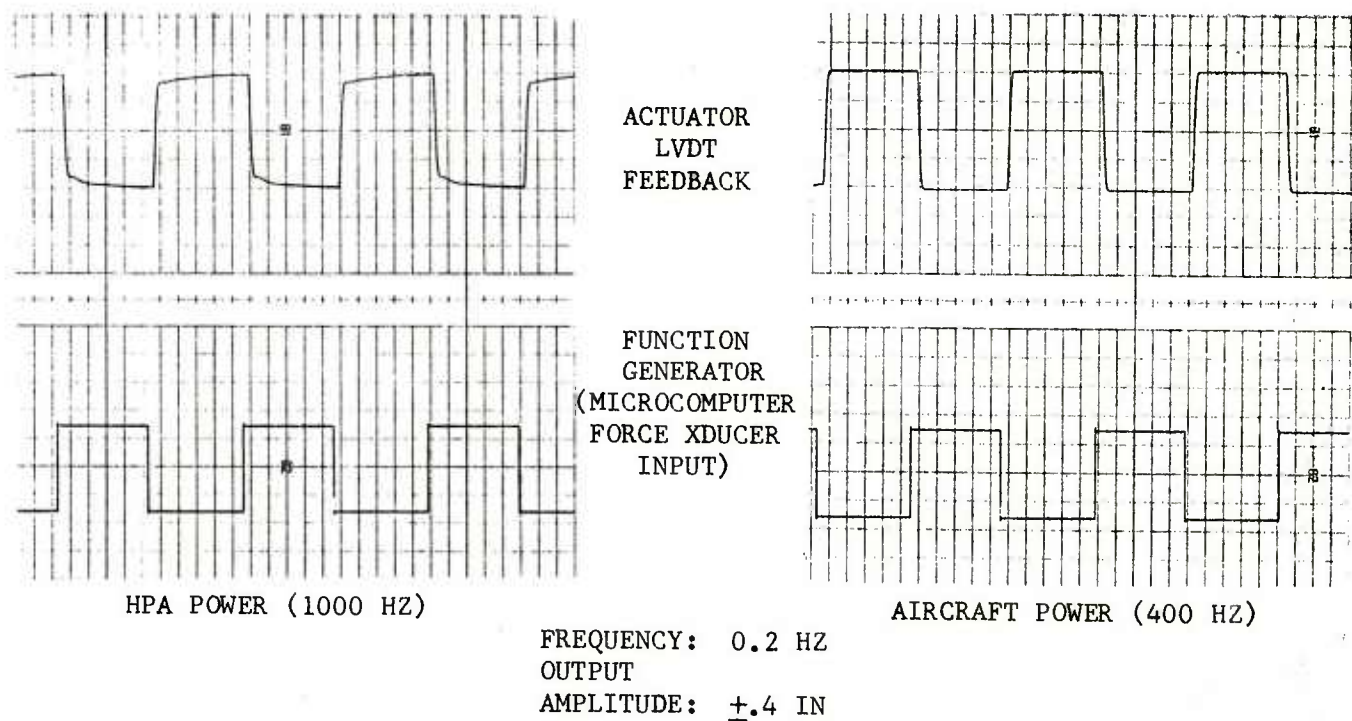


Figure 3-24. Step Input Response, Flight Gain Configuration, DFBW Mode

Table IV. EDU Channels 1 & 2 Power Supply Outputs, System Null

PARAMETER, VDC	CHAN #1 POWER SUPPLY		CHAN #2 POWER SUPPLY	
	VDC	PEAK-TO-PEAK RIPPLE, mv	VDC	PEAK-TO-PEAK RIPPLE, mv
+15	+15.1	50	+15.0	50
-15	-15.1	50	-15.0	50

### 3.4.3 Simulated Failures

3.4.3.1 Fiber Optic Loop, Null Input - The system was connected as shown in Figure 3-18, with the LSSB connected to the microcomputer pedal command input. With the pedal command set at  $0 \pm .1$  VDC and the system engaged in the DFBL mode, one of the fiber optic loop cables was disconnected from the EDU. A simultaneous 0.15 inch (0.38 cm) transient in actuator position (retract) occurred followed by the actuator immediately returning to the null position. This transient is equivalent to a momentary  $1^\circ$  change in aircraft rudder position (total T-2C rudder travel capability for AFCAS is  $\pm 12^\circ$ ) and is not considered significant.

With both fiber optic inputs to the EDU disabled in the DFBL mode, system operation will revert to the ABU mode when the pedal command signal or LVDT feedback (due to actuator drift with no EDU input signal) results in a microcomputer error output exceeding  $1.5^\circ$  for 2 seconds, minimum.

3.4.3.2 Fiber Optic Loop, Dynamic Input - The system was connected as shown in Figure 3-18, with the function generator connected to the microcomputer pedal command input. The function generator output was set for  $\pm 1.25''$  actuator travel at .5 HZ, in the DFBL mode. One of the two fiber optic cables was disconnected from the EDU. The actuator continued cycling, with loop gain reduced by one half and a corresponding reduction in bandpass.

3.4.3.3 Hydra-Powered Alternator (HPA) - The system was connected as shown in Figure 3-18, with the function generator connected to the microcomputer pedal command input and set for  $\pm 1.25''$  actuator travel at .5 HZ, DFBL mode. Hydraulic pressure was removed from the HPA. No transients occurred, and the system subsequently reverted to the ABU mode of operation after two seconds.

In the full aircraft configuration, the system will not automatically revert to the ABU mode with loss of HPA power to the EDU. Since both the pedal and feedback transducers are powered from the EDU, their outputs would go to zero and the microcomputer monitor program would not sense an error great enough to de-energize the DFBL control relays.

### 3.5 PERFORMANCE TESTS

#### 3.5.1 System Frequency Response, Maximum Gain, DFBL Mode

Tests were performed to establish the bandpass capability of the system when the loop gains are increased beyond those desired for T-2C flight testing. To perform these tests, computer gain (percent modulation per volt of error signal) was increased until the system dynamics became limited by system components and not the loop gain. DFBL mode frequency response tests were performed with the system in the increased gain configuration for HPA 1000 HZ and lab 400 HZ EDU power inputs. The results are contained in Figure 3-25, and show the 3 db point occurring at 2.5 HZ for HPA 1000 HZ power and 6.2 HZ for lab 400 HZ power. The difference in performance for the two power sources is produced by the limited power available from the HPA. This is discussed further in section 4.4.

#### 3.5.2 System Frequency Response, ABU Mode

The frequency response of the ABU mode is established by the analog gain of the EDU. After the completion of other dynamic tests, the ABU mode was evaluated to ensure operation was unchanged by incorporation of the HOF CAS. ABU mode frequency response with the system in the flight gain configuration and 400 HZ EDU power is shown in Figure 3-26. Results show the 3 db point occurring at .7 HZ, and is the same performance capability obtained in Phase VI of the AFCAS program.

### 3.6 ENVIRONMENTAL TESTS

#### 3.6.1 Fiber Optic Loop



Temperature tests were performed on the HOF CAS fiber optic control link utilizing the lab temperature chamber. Components located in the chamber included the fiber optic transmitters, detectors, associated circuitry, and fiber optic cabling.

The tests consisted of a 2-hour 32°F (0°C) "cold soak" followed by a 2-hour "soak" at 122°F (50°C). The system was energized at the end of each 2-hour period and the input and output waveforms for null, negative, and positive drive input signals displayed on the oscilloscope. Results showed no change in the output waveforms due to temperature. The null and drive negative signal waveforms are contained in Figure 3-27.

#### 3.6.2 Hydra-Powered Alternator (HPA)

The HOF CAS HPA temperature tests had previously been performed on this unit by the supplier (Bertea). The resultant data is included in Appendix B, paragraph B.5 (Bertea Corporation Acceptance Test Procedure No. 287700-T) of this report.



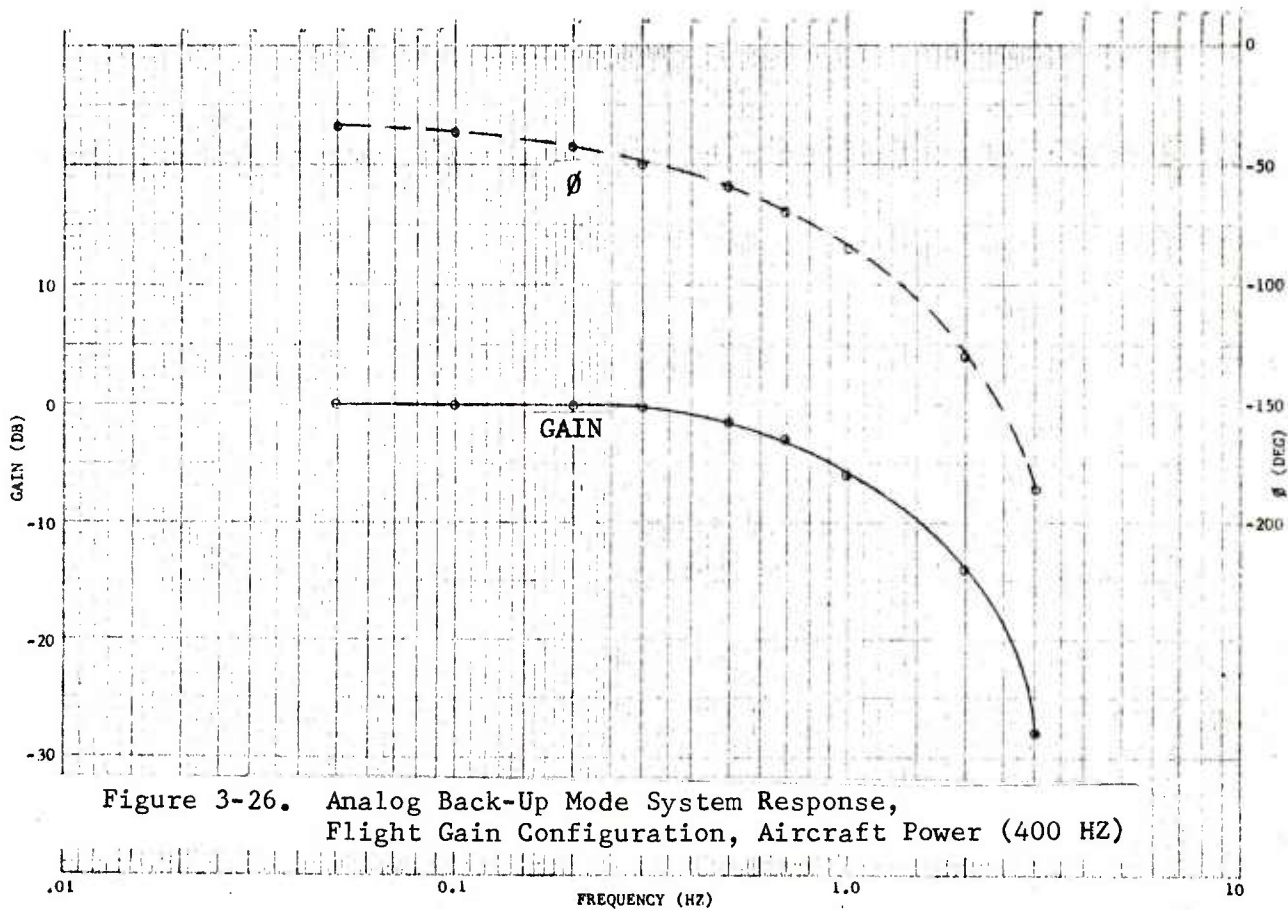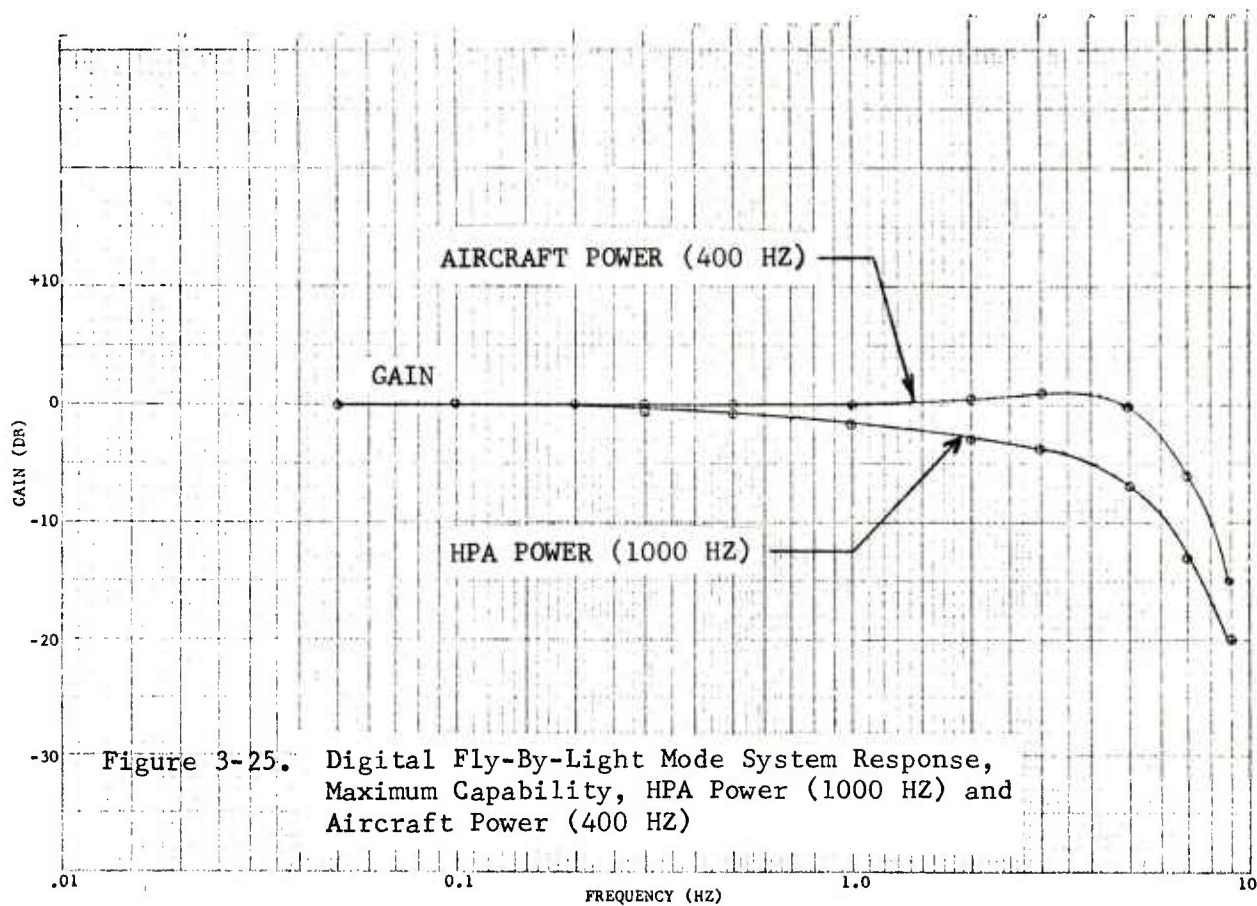



NULL SIGNAL  
(50% MODULATION)

DRIVE NEGATIVE SIGNAL  
(30% MODULATION)

INPUT

OUTPUT

1 cm

70°F (21°C)

INPUT

OUTPUT

32°F (0°C)

INPUT

OUTPUT

122°F (50°C)

Figure 3-27. Temperature Test Fiber Optic Loop Input and Output Waveforms

## 4.0 ANALYSIS OF RESULTS

The test results demonstrate that the HOFCAS is satisfactory for operation in the rudder system of the T-2C aircraft. The testing was divided into three categories. The first group of tests accomplished the functional testing of the added system components, especially the HPA. The second group of tests evaluated the HOFCAS for operation with the T-2C rudder. The third set of tests established performance limits and provided data for suggested improvements in the HOFCAS concept.

### 4.1 HYDRA-POWERED ALTERNATOR (HPA)

The functional tests established the HPA operational capability and demonstrated the unit is adequate to supply the electrical power needed to operate the rudder actuator of a T-2C aircraft. The data, contained in paragraph 3.3, has the characteristics expected for the HPA design. The design is described in Appendix B.

The speed (frequency) and the no load voltage of the alternator are directly related to hydraulic flow, which is controlled by the turbine nozzle diameter and the applied hydraulic pressure (reference Figure 3-2). Increased flow through the fixed nozzle results in increased losses and additional heating of the hydraulic fluid, as shown in Figure 3-3.

The alternator used for this project was an adaptation of an existing missile power source and is wound to provide alternator protection against overloads. This characteristic becomes apparent in the data of Figures 3-6 and 3-7. As the output current is increased, the voltage decreases and total power output remains the same. At the same time, the unit shows very little change in speed (frequency) with increased current. As the power output remains constant at rated load, it is apparent the hydraulic turbine load is constant and the speed would not vary. In addition, the HPA has a very low efficiency (Appendix B) so that slight variations in extracted power have very little effect on total torque required to drive the alternator.

Wave shapes of the alternator output showed the waveform with a resistive load to be nearly sinusoidal. For this system application the output power is supplied to power supplies in the EDU through a transformer and the wave shape is not critical to system operation. When the HPA was used to power the EDU, the load became highly inductive and the wave shape approached a square wave (Figure 3-17). While this does not directly affect system operation, the distorted wave shape reduces transformer and power supply efficiencies and further increases the loading effects on the alternator.

The HPA used for this project is satisfactory for flight testing, and will demonstrate the concept of a D<sup>3</sup> actuation system without electrical power and signals routed to the actuation surface. Several areas of improvement in the HPA performance are desirable and are discussed in Appendix B.

#### 4.2 FIBER OPTIC LINK

The fiber optic link performed satisfactorily as expected. No difference in system performance was noted between the fiber optic link or direct wiring method of connecting the microcomputer output to the EDU, reference Figures 3-20 and 3-22, and Figures 3-23 and 3-24.

#### 4.3 FLIGHT TEST CONFIGURATION

HOFCAS integration tests were performed using the hardware configured to the T-2C aircraft installation. These tests consisted primarily of dynamic response and failure mode evaluation. Frequency response tests showed a slight reduction in system performance with the EDU powered by the HPA 1000 HZ output compared to 400 HZ power (reference Figures 3-19 and 3-20).

The slight reduction in dynamic response, when the EDU is powered by the HPA 1000 HZ output, is due to the limited power capability of the HPA which results in a voltage drop at the torque motor coils when additional power is requested. The voltage drop causes a reduction in loop gain and a corresponding loss of bandpass.

The HPA used in this project is capable of a steady state 26 watt output with no capability of handling higher power demand transients (see Appendix B for further discussion). The EDU peak power requirement is 50 watts, consisting of 32 watts for the torque motor and 18 watts for EDU amplifiers, power supplies, and transducer excitation. The torque motor characteristics (see Figure 4-1) are such that at 26 watts total power (8 watts at the torque motor) the major portion of the spool travel has occurred and the rated flow of the valve is already obtained. The additional power requirement to the torque motor is needed to obtain the full particle shear out capability and is not required for full hydraulic flow. For the T-2C application, if the full torque motor force is required, the system will revert to the ABU mode with aircraft power and full shear force will be available.

The step response characteristics shown in Figures 3-23 and 3-24 again show the effects of limited power to the EDU. This effect is more pronounced with step demands as they require high power peaks.

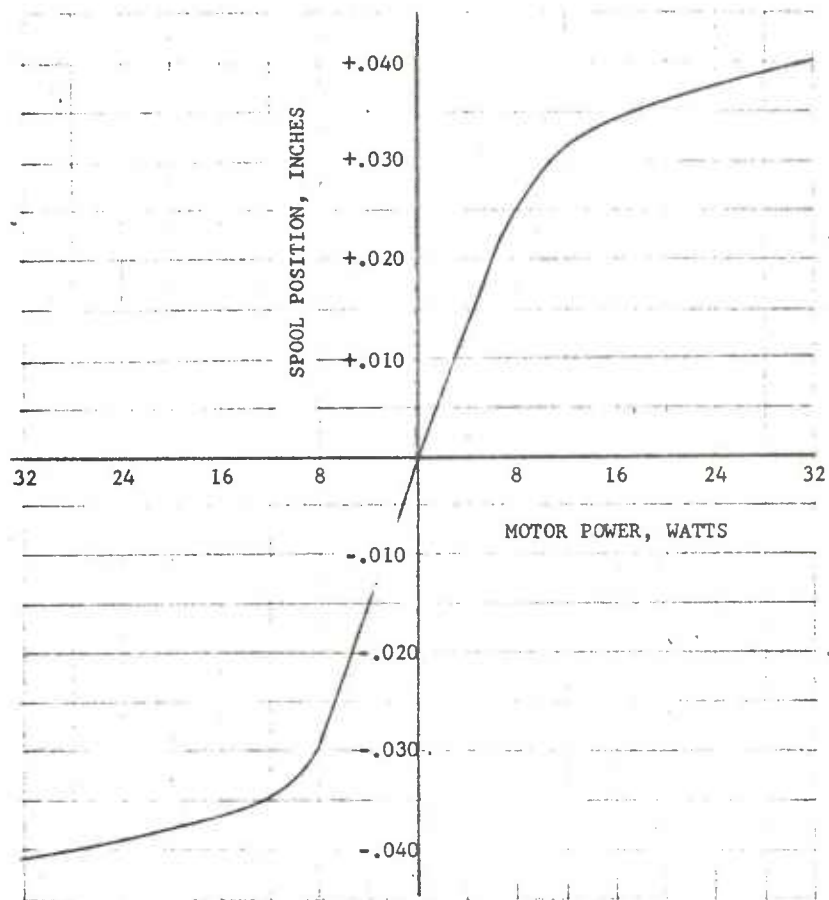


Figure 4-1. Torque Motor Characteristics

Results of the dynamic tests performed in this project successfully demonstrated the suitability for HOFCAS operation in a T-2C aircraft and provided additional data to demonstrate the potential of a HOFCAS design.

The performance of the AFCAS actuator was evaluated in a previous flight test program (Reference 5). The measured frequency response shown in Figure 4-2 is approximately 13 HZ. This response was considerably above that required for the flight test program. The D<sup>3</sup> operation of this actuator (Reference 6) used the same analog EDU to drive the torque motor of the actuator. Since the EDU was not optimized for digital drive some bandpass was lost and the response is that shown on Figure 3-25 for aircraft power. Rockwell laboratory tests of a circuit optimized for direct digital drive have produced the frequency response (25 HZ) shown in Figure 4-3. As the natural frequency of the torque motor is approximately 230 HZ, the dynamic response is limited either by the valve design or the electronic drive design.

The data of Figure 3-25 shows the dynamic response obtained with the present D<sup>3</sup> design and that obtained with the HOFCAS design. As mentioned above the bandpass with aircraft power matches that of Phase VI of the AFCAS program (Reference 6). The reduced response of the HOFCAS design is produced by the limited power available from the HPA. The limited HPA power reduces the power available to the torque motor coils resulting in a reduced loop gain under dynamic conditions. This produces reduced response but no decrease in static accuracy.

For comparison purposes the response curve of the ABU mode is shown in Figure 3-26. This response is the same as that of the two previous flight test programs and demonstrates that the modifications for HOFCAS did not affect the ABU operation.



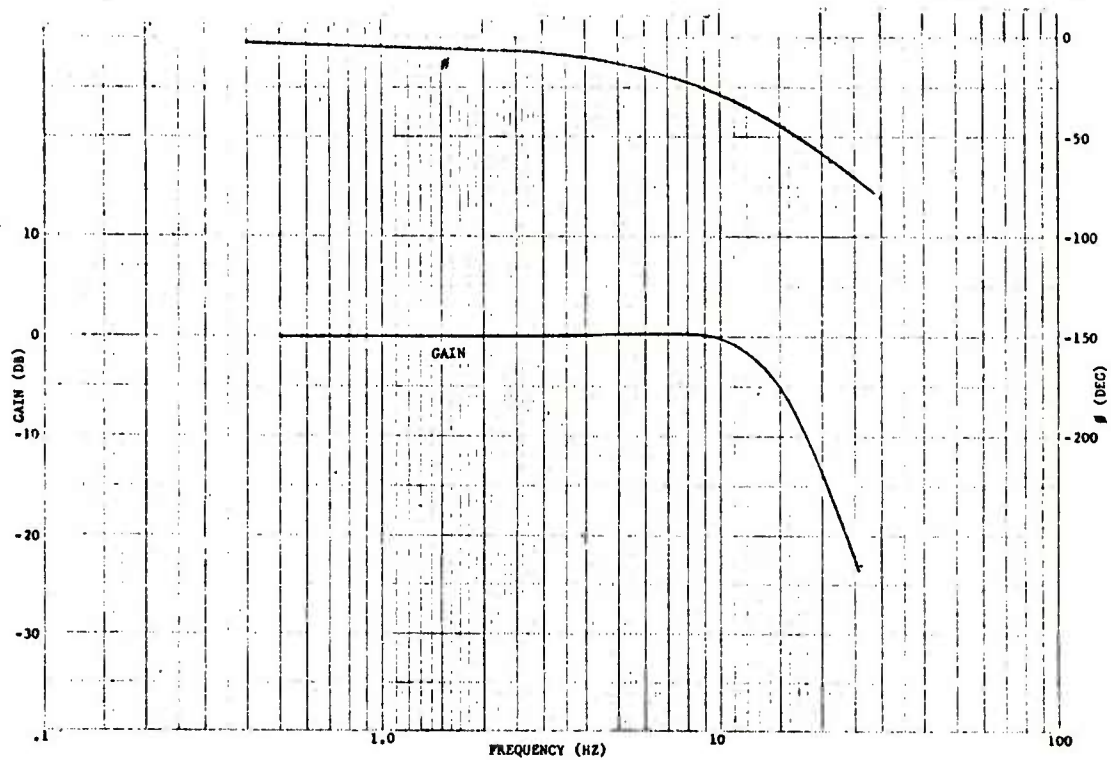


Figure 4-2. AFCAS Frequency Response

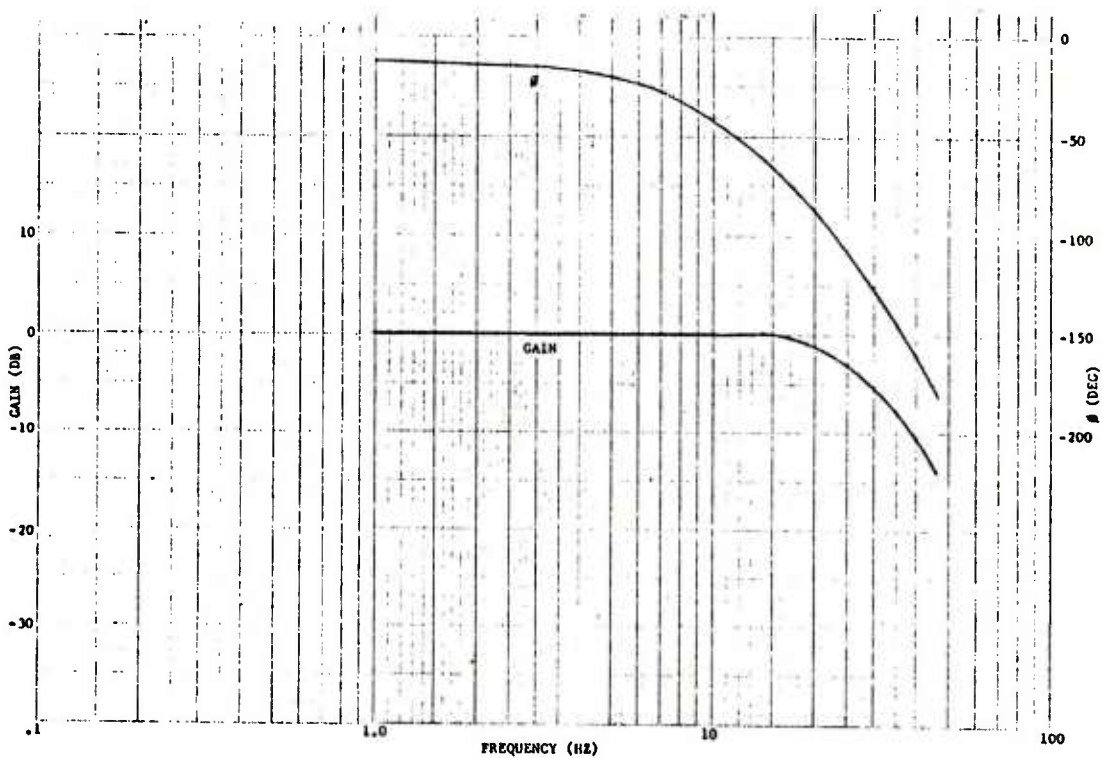


Figure 4-3. Frequency Response, AFCAS Designed For Direct Digital Drive



## 5.0 CONCLUSIONS AND RECOMMENDATIONS

The results of the laboratory tests demonstrate that the HOFCAS configuration is satisfactory for flight testing in a T-2C aircraft. The tests prove the HOFCAS concept is a practical approach for operating remotely located surface actuation with immunity to electromagnetic interference. The D<sup>3</sup> actuator is ideally suited for this application because of the integrated actuator concept and the ease of adapting optical control to the actuator.

The next logical step in developing the HOFCAS would be to demonstrate the concept in flight. Several additional developments, some of which are already in work, are needed to establish this concept for use in future high performance aircraft. These items are:

- A suitable optical actuator feedback link.
- High temperature digital electronics suitable for packaging inside the actuator.
- An improved valve-torque motor suitable for packaging inside the actuator.
- An improved HPA with the capability of handling the peak transient power requirements.
- Design of the integrated actuator package.

The optical feedback link and the valve-torque motor are already under development in separate Navy programs. The drive electronics would be the next needed development. The new electronics and the improved valve-torque motor can be expected to reduce the power requirement of the HPA.

Other studies of interest would include research into methods of improving the HPA efficiency (see Appendix B) without increased size, weight or complexity. A design study to show the advantages of the HPA over the "brute force" approach (shielding, filtering, etc.) to protect against EMP would also be desirable.

The conclusions of this study show that HOFCAS approach incorporating a D<sup>3</sup> actuation system will produce a simple highly reliable actuation system that is immune to the effects of electromagnetic interference.

## REFERENCES

### Reference No.

1. NR72H-240, Feasibility Study for Advanced Flight Control Actuation System (AFCAS), Rockwell International Corporation, Columbus Aircraft Division, Contract N62269-72-C-0108, June 1972, Unclassified. AD 767 058
2. NR73H-107, Control-By-Wire Actuator Model Development for AFCAS, Rockwell International Corporation, Columbus Aircraft Division, Contract N62269-73-C-0405, January 1974, Unclassified. AD 772 588
3. NR75H-1, Control-By-Wire Modular Actuator Tests (AFCAS), Rockwell International Corporation, Columbus Aircraft Division, Contract N62269-73-C-0405, January 1975, Unclassified. AD A-006 371
4. NR76H-1, Design and Fabrication of an 8000 psi Control-By-Wire Actuator for Flight Testing in a T-2C Airplane, Rockwell International Corporation, Columbus Aircraft Division, Contract N62269-75-C-0311, January 1976, Unclassified. AD A024 487/IGI
5. NAVAIRDEVCON 75287-60, Flight Verification of the Advanced Flight Control Actuation System (AFCAS) in the T-2C Aircraft, Columbus Aircraft Division, Rockwell International Corporation, Contract N62269-76-C-0201, June 1978, Unclassified.
6. NAVAIRDEVCON 78207-60, Flight Verification of Direct Digital Drive for an Advanced Flight Control Actuation System (AFCAS) in the T-2C Aircraft, North American Aircraft Division, Rockwell International Corporation, Contract N62269-76-C-0201, November 1979, Unclassified.

## APPENDIX A

### MICROCOMPUTER AND SOFTWARE

## APPENDIX A

### MICROCOMPUTER AND SOFTWARE

The microcomputer selected for this program was based on the Motorola MC6800 microprocessor. The assembly consisted primarily of the Motorola Monoboard Microcomputer 1A (Micromodule 1A) which is a complete computer-on-a-board, plus Burr Brown D/A and A/D converters, all mounted on a mother board and housed in a single unit. This unit, shown in Section 2, Figure 2-9, contains all the interfaces and wiring required for the processor and has space for two additional cards for expansion of capability.

The heart of the unit is the monoboard microcomputer which has the following features:

- MC6800 Microprocessing Unit (MPU) with associated clock oscillator, power on reset timer, and memory decoding logic.
- 1024 Bytes of RAM.
- Sockets for up to 4096 bytes of Alterable Read Only Memory (AROM) or mask-programmable ROM (Four of the 2048 x 8-bit ROM's may also be used if the proper jumper connections are made, thus providing over 8K of ROM on this module).
- One RS-232C compatible interface that utilizes a single MC6850 (ACIA).
- Two programmable MC6820 PIA's that provide 40 programmable Input/Output and control lines.
- Address, data, and control bus drivers to interface Monoboard Microcomputer 1A with other modules in the Family or with an EXORciser.
- TTL signal level inputs and TTL signal level, three-state, or open collector outputs.

This monoboard microcomputer is shown in block diagram form in Figure A-1. A photograph of the board is shown in Figure A-2. The MPU, Motorola MC 6800, is contained on a single chip on the board. The organization of the chip is shown in Figure A-3. The complete instruction set is given in Tables A-I, A-II, and A-III.

The A/D and D/A converters make up the other two boards in the micro-computer assembly. Figure A-4 is a block diagram of the A/D converter. Figure A-5 is a block diagram of the D/A converter.

Table A-IV is a summary of the characteristics of the two converters.

Table A-V is the program listing and Figure A-6 contains the PROM map used for this project.

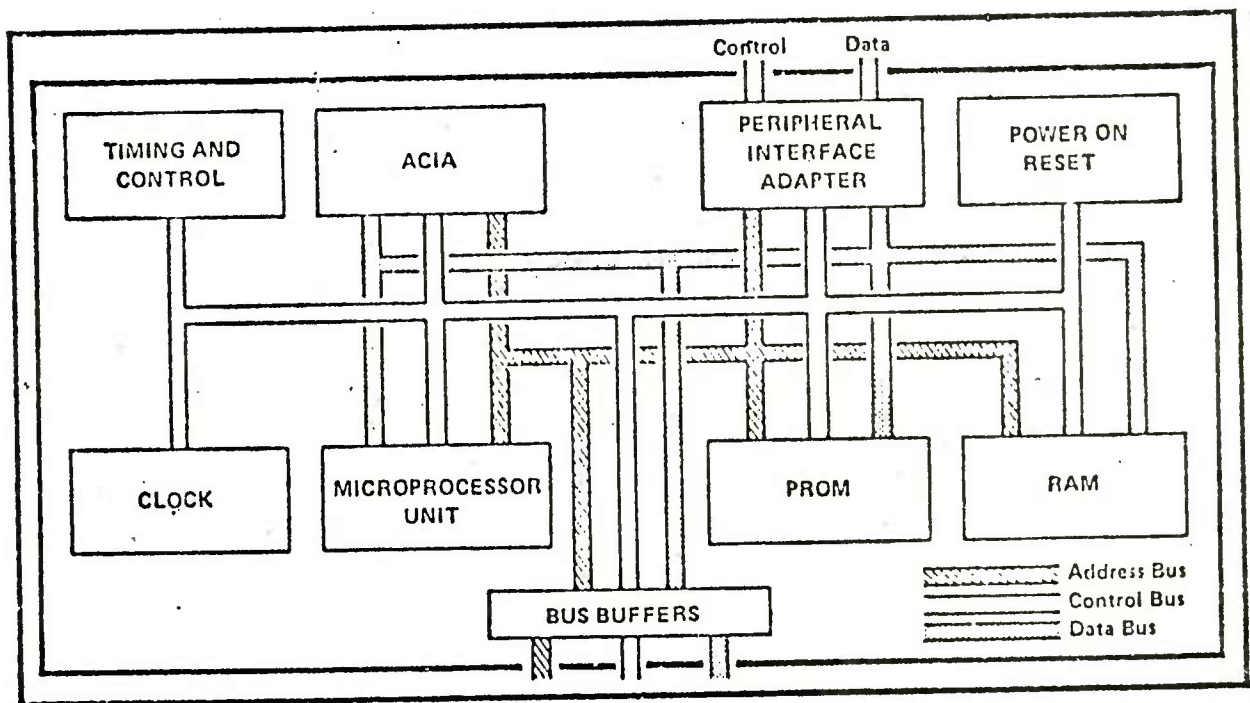


Figure A-1.. Monoboard Microcomputer Block Diagram



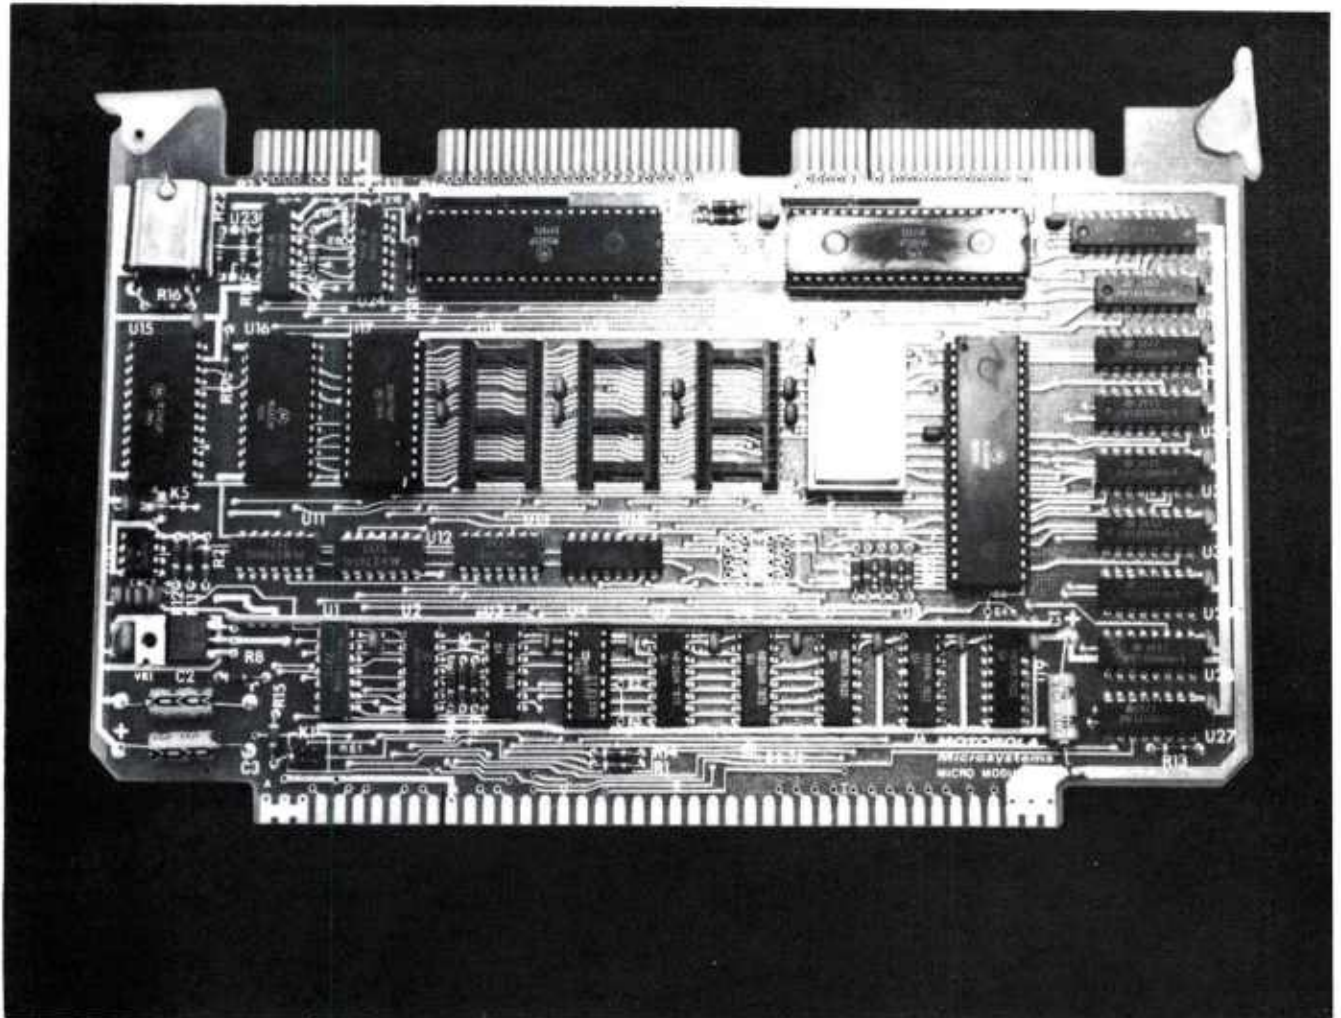


Figure A-2. Monoboard Microcomputer

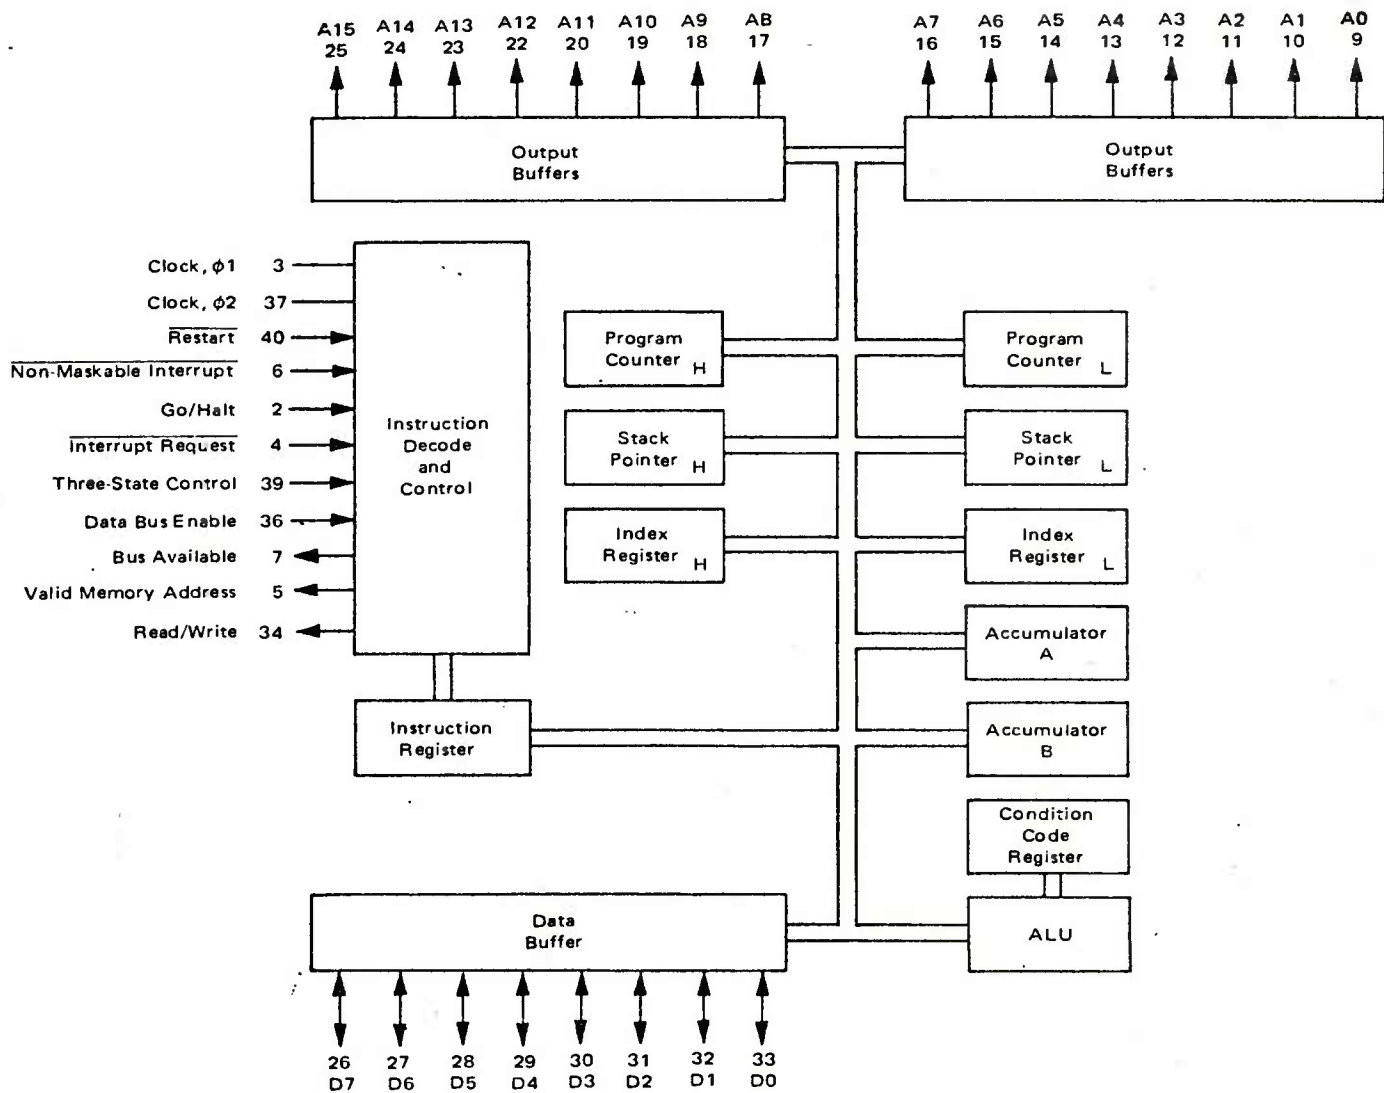


Figure A-3. Microprocessor Unit Organization (MC 6800)

Table A-I. Accumulator and Memory Instructions (MC6800)

		ADDRESSING MODES										BOOLEAN/ARITHMETIC OPERATION		COND. CODE RES.				
OPERATIONS	MNEMONIC	IMMED		DIRECT		INDEX		EXTNO		IMPLIED		(All register labels refer to contents)	5	4	3	2	1	0
		OP	~ =	OP	~ =	OP	~ =	OP	~ =	OP	~ =							
Add	ADDA	BB	2 2	9B	3 2	AB	5 2	BB	4 3			A ← M ← A	1	1	1	1	1	1
	ADDB	CB	2 2	0B	3 2	EB	5 2	FB	4 3			B ← M ← B	1	1	1	1	1	1
Add Acmltrs	ABA									1B	2 1	A ← B ← A	1	1	1	1	1	1
Add with Carry	ADCA	B9	2 2	99	3 2	A9	5 2	B9	4 3			A ← M ← C ← A	1	1	1	1	1	1
	AOCB	C9	2 2	09	3 2	E9	5 2	F9	4 3			B ← M ← C ← B	1	1	1	1	1	1
And	ANDA	B4	2 2	94	3 2	A4	5 2	B4	4 3			A ← M ← A	•	1	1	1	R	•
	ANOB	C4	2 2	04	3 2	E4	5 2	F4	4 3			B ← M ← B	•	1	1	1	R	•
Bit Test	BITA	B5	2 2	95	3 2	A5	5 2	B5	4 3			A ← M	•	1	1	1	R	•
	BITB	C5	2 2	05	3 2	E5	5 2	F5	4 3			B ← M	•	1	1	1	R	•
Clear	CLR					6F	7 2	7F	6 3			00 ← M	•	1	1	1	R	R
	CLRA									4F	2 1	00 ← A	•	1	1	1	R	R
	CLRB									5F	2 1	00 ← B	•	1	1	1	R	R
Compare	CMPA	B1	2 2	91	3 2	A1	5 2	B1	4 3			A ← M	•	1	1	1	1	1
	CMPB	C1	2 2	01	3 2	E1	5 2	F1	4 3			B ← M	•	1	1	1	1	1
Compare Acmltrs	CBA									11	2 1	A ← B	•	1	1	1	1	1
Complement, 1's	COM					B3	7 2	73	6 3			M ← M	•	1	1	1	R	S
	COMA									43	2 1	A ← A	•	1	1	1	R	S
	COMB									53	2 1	B ← B	•	1	1	1	R	S
Complement, 2's (Negate)	NEGA					60	7 2	70	6 3			00 ← M ← M	•	1	1	1	2	2
	NEGB									40	2 1	00 ← A ← A	•	1	1	1	2	2
	NEGB									50	2 1	00 ← B ← B	•	1	1	1	2	2
Decimal Adjust, A	OAA									19	2 1	Converts Binary Add. of BCD Characters into BCD Format	•	1	1	1	3	3
Decrement	DEC					6A	7 2	7A	6 3			M ← M - 1	•	1	1	1	4	•
	DECA									4A	2 1	A ← A - 1	•	1	1	1	4	•
	DECB									5A	2 1	B ← B - 1	•	1	1	1	4	•
Exclusive OR	EORA	B8	2 2	98	3 2	AB	5 2	BB	4 3			A ⊕ M ← A	•	1	1	1	P	•
	EORB	CB	2 2	08	3 2	EB	5 2	FB	4 3			B ⊕ M ← B	•	1	1	1	P	•
Increment	INC					6C	7 2	7C	6 3			M ← M + 1	•	1	1	1	5	•
	INCA									4C	2 1	A ← A + 1	•	1	1	1	5	•
	INCB									5C	2 1	B ← B + 1	•	1	1	1	5	•
Load Acmltr	LOAA	B6	2 2	96	3 2	A6	5 2	B6	4 3			M ← A	•	1	1	1	F	•
	LOADB	C6	2 2	06	3 2	E6	5 2	F6	4 3			M ← B	•	1	1	1	R	•
Or, Inclusive	ORAA	BA	2 2	9A	3 2	AA	5 2	BA	4 3			A ← M ← A	•	1	1	1	P	•
	ORAB	CA	2 2	0A	3 2	EA	5 2	FA	4 3			B ← M ← B	•	1	1	1	P	•
Push Data	PSHA									36	4 1	A ← Msp, SP - 1 → SP	•	1	1	1	•	•
	PSHB									37	4 1	B ← Msp, SP - 1 → SP	•	1	1	1	•	•
Pull Data	PULA									32	4 1	SP + 1 → SP, Msp ← A	•	1	1	1	•	•
	PULB									33	4 1	SP + 1 → SP, Msp ← B	•	1	1	1	•	•
Rotate Left	ROL					69	7 2	79	6 3			M	•	1	1	1	6	•
	ROLA									49	2 1	A	•	1	1	1	6	•
	ROLB									59	2 1	B	•	1	1	1	6	•
Rotate Right	ROR					66	7 2	76	6 3			M	•	1	1	1	6	•
	RORA									46	2 1	A	•	1	1	1	6	•
	RORB									56	2 1	B	•	1	1	1	6	•
Shift Left, Arithmetic	ASL					68	7 2	78	6 3			M	•	1	1	1	6	•
	ASLA									48	2 1	A	•	1	1	1	6	•
	ASLB									58	2 1	B	•	1	1	1	6	•
Shift Right, Arithmetic	ASR					67	7 2	77	6 3			M	•	1	1	1	6	•
	ASRA									47	2 1	A	•	1	1	1	6	•
	ASRB									57	2 1	B	•	1	1	1	6	•
Shift Right, Logic	LSR					64	7 2	74	6 3			M	•	1	1	1	6	•
	LSRA									44	2 1	A	•	1	1	1	6	•
	LSRB									54	2 1	B	•	1	1	1	6	•
Store Acmltr.	STAA			97	4 2	A7	6 2	B7	5 3			A ← M	•	1	1	1	F	•
	STAB			07	4 2	E7	6 2	F7	5 3			B ← M	•	1	1	1	F	•
Subtract	SUBA	B0	2 2	90	3 2	A0	5 2	B0	4 3			A ← M ← A	•	1	1	1	1	1
	SUBB	C0	2 2	00	3 2	E0	5 2	F0	4 3			B ← M ← B	•	1	1	1	1	1
Subtract Acmltrs.	SBA									10	2 1	A ← B ← A	•	1	1	1	1	1
Subtr. with Carry	SBCA	B2	2 2	92	3 2	A2	5 2	B2	4 3			A ← M ← C ← A	•	1	1	1	1	1
	SBCB	C2	2 2	02	3 2	E2	5 2	F2	4 3			B ← M ← C ← B	•	1	1	1	1	1
Transfer Acmltrs	TAB									16	2 1	A ← B	•	1	1	1	R	•
	TBA									17	2 1	B ← A	•	1	1	1	R	•
Test, Zero or Minus	TST					60	7 2	70	6 3			M ← 00	•	1	1	1	R	R
	TSTA									40	2 1	A ← 00	•	1	1	1	R	R
	TSTB									50	2 1	B ← 00	•	1	1	1	R	R

## LEGEND:

OP Operation Code (Hexadecimal);  
 ~ Number of MPU Cycles;  
 # Number of Program Bytes;  
 + Arithmetic Plus;  
 - Arithmetic Minus;  
 • Boolean AND;

Msp Contents of memory location pointed to be Stack Pointer;

+ Boolean Inclusive OR;  
 ⊕ Boolean Exclusive OR;  
 M Complement of M;  
 → Transfer Into;  
 0 Bit = Zero;  
 00 Byte = Zero;

## CONDITION CODE SYMBOLS:

H Half-carry from bit 3;  
 I Interrupt mask  
 N Negative (sign bit)  
 Z Zero (byte)  
 V Overflow, 2's complement  
 C Carry from bit 7  
 R Reset Always  
 S Set Always  
 † Test and set if true, cleared otherwise  
 • Not Affected

Note - Accumulator addressing mode instructions are included in the column for IMPLIED addressing

Table A-II. Index Register and Stack Manipulation Instructions (MC6800)

																	COND. CODE REG.																
		IMMED			DIRECT			INDEX			EXTND			IMPLIED																			
POINTER OPERATIONS	MNEMONIC	DP	~	≠	DP	~	≠	DP	~	≠	DP	~	≠	DP	~	≠	BOOLEAN/ARITHMETIC OPERATION	H	I	N	Z	V	C										
Compare Index Reg	CPX	9C	3	3	9C	4	2	AC	6	2	BC	5	3				X <sub>H</sub> - M, X <sub>L</sub> - (M + 1)	•	•	①	!	•	•										
Decrement Index Reg	DEX													09	4	1	X - 1 → X	•	•	•	↑	•	•										
Decrement Stack Pntr	DES													34	4	1	SP - 1 → SP	•	•	•	•	•	•										
Increment Index Reg	INX													08	4	1	X + 1 → X	•	•	•	↑	•	•										
Increment Stack Pntr	INS													31	4	1	SP + 1 → SP	•	•	•	•	•	•										
Load Index Reg	LDX	CE	3	3	DE	4	2	EE	6	2	FE	5	3				M → X <sub>H</sub> , (M + 1) → X <sub>L</sub>	•	•	③	!	R	•										
Load Stack Pntr	LDS	BE	3	3	9E	4	2	AE	6	2	BE	5	3				M → SP <sub>H</sub> , (M + 1) → SP <sub>L</sub>	•	•	③	!	R	•										
Store Index Reg	STX				DF	5	2	EF	7	2	FF	6	3				X <sub>H</sub> → M, X <sub>L</sub> → (M + 1)	•	•	③	!	R	•										
Store Stack Pntr	STS				9F	5	2	AF	7	2	BF	6	3				SP <sub>H</sub> → M, SP <sub>L</sub> → (M + 1)	•	•	③	!	R	•										
Indx Reg → Stack Pntr	TXS													35	4	1	X - 1 → SP	•	•	•	•	•	•										
Stack Pntr → Indx Reg	TSX													30	4	1	SP + 1 → X	•	•	•	•	•	•										

Table A-III. Jump and Branch Instructions (MC6800)

														COND. CODE REG.						
		RELATIVE			INDEX			EXTND			IMPLIED									
OPERATIONS	MNEMONIC	DP	~	#	DP	~	#	DP	~	#	DP	~	#	BRANCH TEST						
														5	4	3	2	1	0	
														H	I	N	Z	V	C	
Branch Always	BRA	20	4	2										None	•	•	•	•	•	
Branch If Carry Clear	BCC	24	4	2										C = 0	•	•	•	•	•	
Branch If Carry Set	BCS	25	4	2										C = 1	•	•	•	•	•	
Branch If = Zero	BEQ	27	4	2										Z = 1	•	•	•	•	•	
Branch If ≥ Zero	BGE	2C	4	2										$N \oplus V = 0$	•	•	•	•	•	
Branch If > Zero	BGT	2E	4	2										$Z + (N \oplus V) = 0$	•	•	•	•	•	
Branch If Higher	BHI	22	4	2										$C + Z = 0$	•	•	•	•	•	
Branch If ≤ Zero	BLE	2F	4	2										$Z + (N \oplus V) = 1$	•	•	•	•	•	
Branch If Lower Or Same	BLS	23	4	2										$C + Z = 1$	•	•	•	•	•	
Branch If < Zero	BLT	2D	4	2										$N \oplus V = 1$	•	•	•	•	•	
Branch If Minus	BMI	28	4	2										N = 1	•	•	•	•	•	
Branch If Not Equal Zero	BNE	26	4	2										Z = 0	•	•	•	•	•	
Branch If Overflow Clear	BVC	28	4	2										V = 0	•	•	•	•	•	
Branch If Overflow Set	BVS	29	4	2										V = 1	•	•	•	•	•	
Branch If Plus	BPL	2A	4	2										N = 0	•	•	•	•	•	
Branch To Subroutine	BSR	BD	8	2											•	•	•	•	•	
Jump	JMP				6E	4	2	7E	3	3				}	See Special Operations	•	•	•	•	
Jump To Subroutine	JSR				AD	8	2	BD	9	3						•	•	•	•	•
No Operation	NOP										01	2	1	}	Advances Prog. Cntr. Only	•	•	•	•	
Return From Interrupt	RTI										3B	10	1			•	•	•	•	•
Return From Subroutine	RTS										39	5	1			•	•	•	•	•
Software Interrupt	SWI										3F	12	1			•	•	•	•	•
Wait for Interrupt*	WAI										3E	9	1	}	See Special Operations	•	•	•	•	
																②	•	•	•	•

\*WAI puts Address Bus, R/W, and Data Bus in the three state mode while VMA is held low.

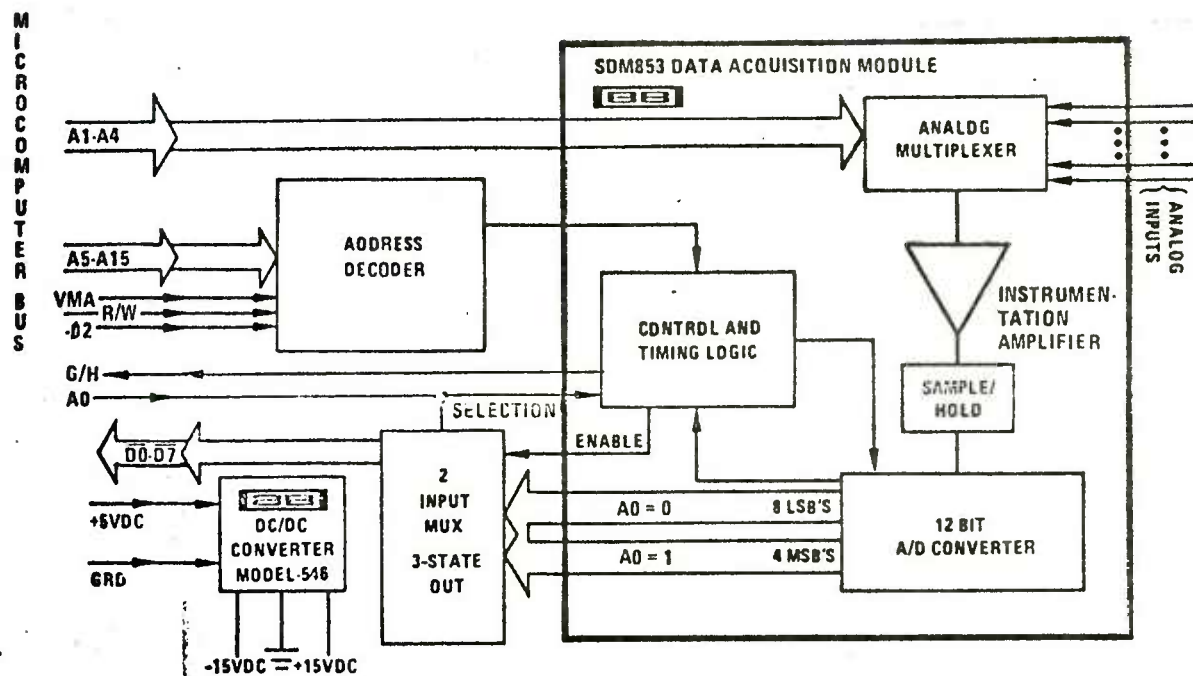


Figure A-4. Analog to Digital Converter - MP7208/7216

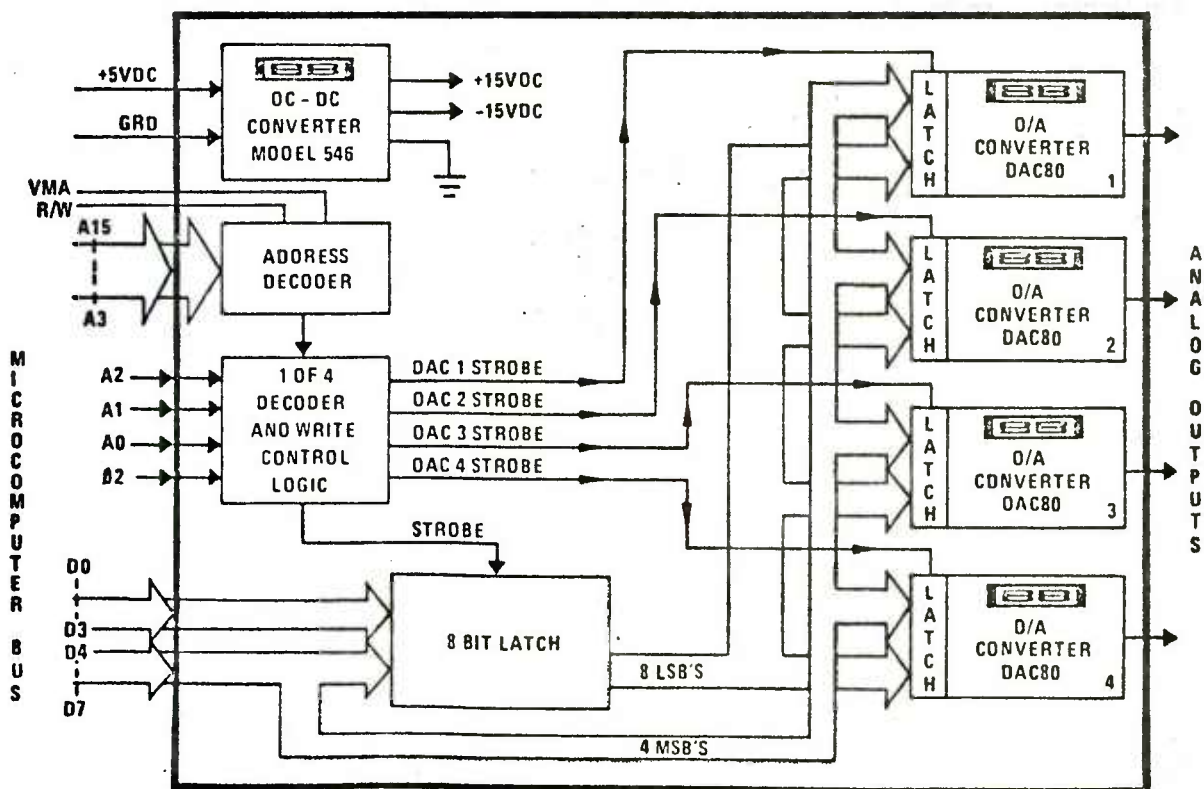


Figure A-5. Digital to Analog Converter - MP7104



Table A-IV. Converter Characteristics

ANALOG TO DIGITAL

NUMBER OF CHANNELS	8
INPUT VOLTAGE	$\pm 10$ MV TO $\pm 10$ V
INPUT IMPEDANCE	100 MEGOHMS
RESOLUTION	12 Bits BINARY
CONVERSION TIME ( $\pm 10$ V)	33 MICROSECONDS

DIGITAL TO ANALOG

NUMBER OF CHANNELS	4
OUTPUT VOLTAGE, VDC	$\pm 2.5$ , $\pm 5$ , $\pm 10$ , 0 TO 5, 0 TO 10
OUTPUT IMPEDANCE	1 OHM
RESOLUTION	12 Bits BINARY

Table A-V. Program Listing

## SUBROUTINE - TEMP STORAGE

## PROGRAM LISTING - DFBL

INSTRUCTION		EXECUTION TIME	COMMENTS
LOCATION	OP. CODE		
00 50	XX XX		CMD1
00 52	XX XX		POS1
00 54	XX XX		CMD2
00 56	XX XX		POS2
00 58	XX XX		ERROR
00 5A	XX --		CARRY
00 5C	XX --		MONITOR CONTROL
00 5E	XX --		CMD CTR
00 60	XX --		POS CTR
00 62	XX --		ERROR CTR
00 64	XX XX		XX, PLUS ON TIME; YY, MINUS ON TIME
00 66	XX YY		

INSTRUCTION			EXECUTION TIME	COMMENTS
LOCATION	OP. CODE	OPERANDS		
CC 6A	CE	04 00		LDX +5VDC
CC 6D	FF	EF 06		STX TURN ON DAC-4
CC 70	OF	-- --		SEI SET INTERRUPT MASK
CC 71	86	1F --		LDA 10
CC 73	97	60 --		STA CMD CTR
CC 75	97	62 --		STA POS CTR
CC 77	CE	04 00		LDX 1 SEC
CC 7A	DF	64 --		STA ERROR CTR
CC 7C	20	02 --		BRA TO PROG START

## PROGRAM LISTING - DFBL

## SUBROUTINE - INPUT 1

INSTRUCTION		EXECUTION TIME	COMMENTS
LOCATION	OP. CODE    OPERANDS		
CC 80	CE	3/	LDX +10VDC
CC 83	FF	6/	STX DAC-1
CC 86	FF	6/	STX DAC-2
CC 89	B6	4/	LDA-A START A-D CH. 0 CMD
CC 8C	01	*2/	NOP WAIT FOR CONVERSION
CC 8D	FE	5/	LDX CMD IN "X"
CC 90	DF	5/	STX
CC 92	B6	4/	LDA-A START A-D CH. 2 POS.
CC 95	01	*2/	NOP WAIT FOR CONVERSION
CC 96	FE	5/	LDX POS IN "X"
CC 99	DF	5/	STX

\* 33  $\mu$  sec for A/D Conversion

## SUBROUTINE - CMD1 LIMITS

## PROGRAM LISTING - DFBL

INSTRUCTION			EXECUTION TIME	COMMENTS
LOCATION	OP. CODE	OPERANDS		
CC 9B	96	50 --	3/ 118	LDA-A CMD-1
CC 9D	2B	0B --	4/ 122	BMI TO AA
CC 9F	81	04 --	2/ 124	CMP
CC A1	2B	13 --	4/ 128	BMI TO B6
CC A3	CE	04 00	3/ 131	LDX +5V
CC A6	DF	50 --	5/ 136	STX CMD1
CC A8	20	12 --	4/ 140	BRA TO BC
CC AA	40	-- --	2/ 124	NEG
CC AB	81	05 --	2/ 126	CMP
CC AD	2B	07 --	4/ 130	BMI TO B6
CC AF	CE	FC 00	3/ 133	LDX -5V
CC B2	DF	50 --	5/ 138	STX CMD1
CC B4	20	06 --	4/ 142	BRA TO BC
CC B6	73	00 00	6/ 134	COM
CC B9	73	00 00	6/ 140	COM
CC BC	73	00 00	6/ 148	COM
CC BF	20	3F --	4/ 152	BRA



## PROGRAM LISTING - DFBL

## SUBROUTINE - ERROR

INSTRUCTION		EXECUTION TIME	COMMENTS
LOCATION	OP. CODE    OPERANDS		
CD 00	96    53 --	3/	LDA-A    POSITION (L.S. BYTE)
CD 02	43    -- --	2/	COM-A
CD 03	9B    51 --	3/	ADD    LS = CMD - POS
CD 05	24    04 --	4/	BCC    12
CD 07	C6    01	2/	LDA-B    01
CD 09	20    03 --	4/	BRA
CD 0B	01    -- --	2/	NOP
CD 0C	01    -- --	2/	NOP
CD 0D	5F    -- --	2/	CLR-B
CD 0E	D7    5A --	4/	STA-B
CD 10	D6    52 --	3/	LDA-B    SAVE CARRY
CD 12	53    -- --	2/	COM-B    POSITION (M.S. BYTE)
CD 13	DB    50 --	3/	ADD-B
CD 15	DB    5A --	3/	ADD-B    = CMD - POS
CD 17	57    -- --	2/	ASR-B
CD 18	46    -- --	2/	ROR-A
CD 19	57    -- --	2/	ASR-B
CD 1A	46    -- --	2/	ROR-A
CD 1B	D7    58 --	4/	STA-B    ERROR (HI)
CD 1D	97    59 --	4/	STA-A    ERROR (LO)
CD 1F	01    -- --	2/	NOP

INSTRUCTION		EXECUTION TIME	COMMENTS
LOCATION	OP. CODE		
CD 20	D6	3/ 48	LDA-B ERROR, LO
CD 22	96	3/ 51	LDA-A ERROR, HI
CD 24	01	2/ 53	NOP
CD 25	01	2/ 55	NOP
CD 26	4D	2/ 57	TST-A
CD 27	2B	4/ 61	BMI TO NEG ERROR

SUBROUTINE - POSITIVE ERROR

PROGRAM LISTING - DFBL

INSTRUCTION		EXECUTION TIME	COMMENTS
LOCATION	OP. CODE OPERANDS		
CD 29	84 07 --	2/ 63	AND-A
CD 2B	26 0F --	4/ 67	BNE TO SET MAX MODULATION TIME
CD 2D	C4 80 --	2/ 69	AND-B
CD 2F	26 0E --	4/ 73	BNE TO SET MAX MOD. TIME
CD 31	D6 59 --	3/ 76	LDA-B ERROR, LO
CD 33	D7 66 --	4/ 80	STA-B TIME FOR POS. MOD.
CD 35	86 7F --	2/ 82	LDA-A 7F
CD 37	10 --	2/ 84	SBA
CD 38	97 67 --	4/ 88	STA-A TIME FOR NEG. MOD.
CD 3A	20 34 --	4/ 92	BRA TO POS. OUTPUT
CD 3C	01 01	6/ 73	NOP
CD 3F	86 7F --	2/ 75	LDA-A 7F
CD 41	97 66 --	4/ 79	STA-A TIME FOR POS. MOD.
CD 43	C6 00 --	2/ 81	LDA-B 00
CD 45	D7 67 --	4/ 85	STA-B TIME FOR NEG. MOD.
CD 47	01 --	2/ 87	NOP
CD 48	20 26 --	4/ 91	BRA TO POS. OUTPUT

PROGRAM LISTING - DFBL

SUBROUTINE - NEGATIVE ERROR

INSTRUCTION		EXECUTION TIME	COMMENTS
LOCATION	OP. CODE		
CD 4A	43	2/ 63	COM-A
CD 4B	84	2/ 65	AND
CD 4D	26	4/ 69	BNE TO SET MAX NEG. MOD. TIME
CD 4F	53	2/ 71	COM-B
CD 50	C4	2/ 73	AND
CD 52	26	4/ 77	BNE TO SET MAX NEG. MOD. TIME
CD 54	D6	3/ 80	LDA-B ERROR, LO
CD 56	53	2/ 82	COM-B
CD 57	D7	4/ 86	STA-B TIME FOR NEG. MOD. TIME
CD 59	86	2/ 88	LDA-A 7F
CD 5B	10	2/ 90	SBA
CD 5C	97	4/ 94	STA-A TIME FOR POS. MOD. TIME
CD 5E	20	4/ 98	BRA TO NEG. OUTPUT
CD 60	01	4/ 73	NOP
CD 62	01	4/ 77	NOP
CD 64	86	2/ 79	LDA-A 7F
CD 66	97	4/ 83	STA-A TIME FOR NEG. MOD.
CD 68	C6	2/ 85	LDA-B 00
CD 6A	D7	4/ 89	STA-B TIME FOR POS. MOD.
CD 6C	01	4/ 93	NOP
CD 6E	20	4/ 97	BRA TO NEG. OUTPUT

SUBROUTINE - PLUS OUTPUT

PROGRAM LISTING - DFBL

INSTRUCTION		OPERANDS	EXECUTION TIME	COMMENTS
LOCATION	OP. CODE			
CD 70	86	7F --	2/ 2	LDA-A
CD 72	4A	-- --	2/ 4	DEC-A
CD 73	2A	FD --	4/ 774	BPL
CD 75	96	66 --	2/ 776	LDA-A PLUS ON TIME
CD 77	4A	-- --	2/	DEC-A
CD 78	2A	FD --	4/ 782*	BPL
CD 7A	CE	F8 00	3/ 785	LDX -10V
CD 7D	FF	EF 00	6/ 791	STX DAC-1
CD 80	FF	EF 02	6/ 797	STX DAC-2
CD 83	96	67 --	2/ 799	LDA-A MINUS ON TIME
CD 85	4A	-- --	2/	DEC-A
CD 86	2A	FD --	4/1567*	BPL
CD 88	20	26 --	4/1571	BRA TO MONITOR

\*TIME WITH ZERO ERROR



INSTRUCTION		EXECUTION TIME	COMMENTS
LOCATION	OP CODE		
CD 90	96	2/	LDA-A TIME FOR PLUS OUTPUT
CD 92	D6	2/	LDA-B TIME FOR MINUS OUTPUT
CD 94	4A	2/	DEC-A
CD 95	2A	4/ 774*	BPL
CD 97	CE	3/ 777	LDX -10V
CD 9A	FF	6/ 783	STX DAC-1
CD 9D	FF	6/ 789	STX DAC-2
CD A0	5A	2/	DEC-B
CD A1	2A	4/ 795*	BPL
CD A3	86	2/ 797	LDA-A
CD A5	4A	2/	DEC-A
CD A6	2A	4/1566*	BPL
CD A8	20	4/1570	BRA TO MONITOR
			*TIME WITH ZERO ERROR

PROGRAM LISTING - DFBL

SUBROUTINE - INPUT 2

INSTRUCTION		EXECUTION TIME	COMMENTS
LOCATION	OP. CODE		
CD B0	B6	4/ 4	LDA-A START A-D CH. 1 CMD-2
CD B3	01	*2/ 37	NOP
CD B4	FE	5/ 42	LDX CMD-2
CD B7	DF	5/ 47	STX
CD B9	B6	4/ 51	LDA-A START A-D CH. 3 POS-2
CD BC	01	*2/ 86	NOP
CD BD	FE	5/ 91	LDX POS-2
CD C0	DF	5/ 96	STX
CD C2	96	3/ 99	LDA-A CMD-2
CD C4	2B	4/ 103	BNI TO TEST NEG. LIMITS
CD C6	81	2/ 105	CMP TEST POS. LIMITS
CD C8	2B	4/ 109	BNI
CD CA	CE	3/ 112	LDX +5V
CD CD	DF	4/ 117	STX CMD-2
CD CF	20	4/ 121	BRA TO EXIT
CD D1	40	2/ 105	NEG TEST NEG. LIMITS
CD D2	81	2/ 107	CMP
CD D4	2B	4/ 111	BNI
CD D6	CE	3/ 114	LDX -5V
CD D9	DF	5/ 119	STX CMD-2
CD DB	20	4/ 123	BRA
CD DD	73	6/ 117	COM
CD E0	73	6/ 123	COM
CD E3	73	6/ 129	COM
CD E6	96	3/ 132	LDA-A MONITOR CONTROL
CD E8	2A	4/ 136	BPL TO CMD MONITOR
CD EA	20	4/ 140	BRA TO POS. MONITOR
	EC 02		
	-- --		
	EC 02		
	54 --		
	EC 06		
	-- --		
	EC 06		
	56 --		
	54 --		
	0B --		
	04 --		
	13 --		
	04 00		
	54 --		
	12 --		
	-- --		
	05 --		
	07 --		
	FC 00		
	54 --		
	06 --		
	00 00		
	00 00		
	00 00		
	5E --		
	16 --		
	54 --		

## SUBROUTINE - CMD MONITOR

## PROGRAM LISTING - DFBL

INSTRUCTION		EXECUTION TIME	COMMENTS
LOCATION	OP. CODE		
CE 00	96	3/	LDA-A CMD1 (LO)
CE 02	43	2/	COM-A
CE 03	9B	3/	ADD CMD2 (LO)
CE 05	24	4/	BCC
CE 07	C6	2/	LDA-B 01
CE 09	20	4/	BRA
CE 0B	01	4/	NOP
CE 0D	5F	2/	CLR-B
CE 0E	D7	4/	STA-B
CE 10	D6	3/	LDA-B SAVE CARRY
CE 12	53	2/	COM-B CMD1 (HI)
CE 13	DB	3/	ADD-B CMD2 (HI)
CE 15	DB	3/	ADD-B CARRY
CE 17	2A	4/	BPL
CE 19	53	2/	COM-B
CE 1A	C4	2/	AND-B
CE 1C	26	4/	BNE
CE 1E	86	2/	LDA-A
CE 20	97	4/	STA-A
CE 22	20	4/	BRA
CE 24	7A	6/	DEC
CE 27	2A	4/	BPL
CE 29	20	4/	BRA
CE 2B	86	2/	LDA-A -1
CE 2D	97	4/	STA-A
CE 2F	20	4/	BRA

PROGRAM LISTING - DFBL

SUBROUTINE - POS MONITOR

INSTRUCTION			COMMENTS	EXECUTION TIME
LOCATION	OP. CODE	OPERANDS		
CE 40	96	53 --	LDA-A POS1 (LO)	3/ 3
CE 42	43	-- --	COM-A	2/ 5
CE 43	9B	57 --	ADD POS2 (LO)	3/ 8
CE 45	24	04 --	BCC	4/ 12
CE 47	C6	01 --	LDA-B 01	2/ 14
CE 49	20	03 --	BRA	4/ 18
CE 4B	01	01 --	NOP	4/ 16
CE 4D	5F	-- --	CLR-B	2/ 18
CE 4E	D7	5A --	STA-B SAVE CARRY	4/ 22
CE 50	D6	52 --	LDA-B POS1 (HI)	3/ 25
CE 52	53	-- --	COM-B	2/ 27
CE 53	DB	56 --	ADD-B POS2 (HI)	3/ 30
CE 55	DB	5A --	ADD-B CARRY	3/ 33
CE 57	2A	01 --	BPL	4/ 37
CE 59	53	-- --	COM-B.	2/ 39
CE 5A	C4	07 --	AND-B	2/ 41
CE 5C	26	06 --	BNE	4/ 45
CE 5E	86	1F --	LDA-A	2/ 47
CE 60	97	62 --	STA-A	4/ 51
CE 62	20	07 --	BRA	4/ 55
CE 64	7A	00 62	DEC POS CTR	6/ 51
CE 67	2A	02 --	BPL TO ERROR MONITOR	4/ 55
CE 69	20	36 --	BRA TO ERROR MONITOR	4/ 57
CE 6B	86	08 --	LDA-A +08	2/ 57
CE 6D	97	5E --	STA-A MONITOR CONTROL	4/ 61
CE 6F	20	0F --	BRA TO ERROR MONITOR	4/ 65

PROGRAM LISTING - DFBL

SUBROUTINE - MONITOR ERROR

INSTRUCTION		EXECUTION TIME	COMMENTS
LOCATION	OPCODE OPERANDS		
CE 80	96 58 --	3/ 3	LDA-A ERROR (HI)
CE 82	2A 04 --	4/ 7	BPL
CE 84	96 67 --	3/ 10	LDA-A TIME FOR MINUS ON
CE 86	20 04 --	4/ 14	BRA TO AND
CE 88	96 66 --	3/ 10	LDA-A TIME FOR PLUS ON
CE 8A	01 01 --	4/ 14	NOP
CE 8C	84 40 --	2/ 16	AND
CE 8E	27 09 --	4/ 20	BEQ
CE 90	DE 64 --	3/ 23	LDX ERROR COUNTER
CE 92	09 -- --	4/ 27	DEX
CE 93	DF 64 --	4/ 32	STX
CE 95	26 07 --	4/ 36	BNE
CE 97	20 08 --	4/ 40	BRA TO PROG START
CE 99	CE 04 00	3/ 43	TO TURN OFF RELAY
CE 9C	DF 64 --	5/ 48	1 SECOND
CE 9E	7E CC 80	3/ 51	TO PROG START
CE A1	CE 00 00	3/	OV
CE A4	FF EF 06		STX
CE A7	86 04 --		TURN OFF RELAY
CE A9	CE 7F FF		4
CE AC	09 -- --		.25 SEC
CE AD	26 FD --		DEX
CE AF	4A -- --		BNE-3
CE B0	26 F7 --		DEC A
CE B2	7E CC 6A		BNE-9 TO CEA9
			JMP TO START



P GROUP	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0000	<del>56</del>	<del>3F</del>	<del>ED</del>	<del>ED</del>	<del>37</del>	<del>36</del>	<del>FC</del>	<del>ED</del>	<del>36</del>	<del>26</del>	<del>EB</del>	<del>FB</del>	<del>26</del>	<del>06</del>	<del>FB</del>	<del>ED</del>
0010	<del>07</del>	<del>B7</del>	<del>ED</del>	<del>EE</del>	<del>36</del>	<del>17</del>	<del>ED</del>	<del>ED</del>	<del>36</del>	<del>36</del>	<del>ED</del>	<del>ED</del>	<del>26</del>	<del>26</del>	<del>ED</del>	<del>FB</del>
0020	<del>17</del>	<del>37</del>	<del>EC</del>	<del>EC</del>	<del>26</del>	<del>26</del>	<del>ED</del>	<del>FD</del>	<del>37</del>	<del>37</del>	<del>ED</del>	<del>ED</del>	<del>36</del>	<del>27</del>	<del>ED</del>	<del>FB</del>
0030	<del>27</del>	<del>17</del>	<del>EC</del>	<del>ED</del>	<del>67</del>	<del>36</del>	<del>ED</del>	<del>EC</del>	<del>36</del>	<del>16</del>	<del>ED</del>	<del>ED</del>	<del>07</del>	<del>26</del>	<del>ED</del>	<del>FB</del>
0040	<del>B9</del>	<del>B9</del>	<del>12</del>	<del>12</del>	<del>F9</del>	<del>D9</del>	<del>12</del>	<del>12</del>	<del>C9</del>	<del>C9</del>	<del>02</del>	<del>12</del>	<del>D9</del>	<del>D9</del>	<del>12</del>	<del>12</del>
0050	<del>69</del>	<del>F9</del>	<del>12</del>	<del>12</del>	<del>C9</del>	<del>D9</del>	<del>12</del>	<del>12</del>	<del>E9</del>	<del>C9</del>	<del>02</del>	<del>12</del>	<del>66</del>	<del>FB</del>	<del>12</del>	<del>12</del>
0060	<del>E9</del>	<del>F9</del>	<del>12</del>	<del>12</del>	<del>D9</del>	<del>C9</del>	<del>12</del>	<del>12</del>	<del>02</del>	<del>D3</del>	<del>C9</del>	<del>CE</del>	<del>04</del>	<del>00</del>	<del>FF</del>	<del>EF</del>
0070	<del>0F</del>	<del>86</del>	<del>1F</del>	<del>97</del>	<del>60</del>	<del>97</del>	<del>62</del>	<del>CE</del>	<del>04</del>	<del>00</del>	<del>DF</del>	<del>64</del>	<del>20</del>	<del>02</del>	<del>02</del>	<del>12</del>
0080	<del>CE</del>	<del>07</del>	<del>FF</del>	<del>FF</del>	<del>EF</del>	<del>00</del>	<del>FF</del>	<del>EF</del>	<del>02</del>	<del>D6</del>	<del>EC</del>	<del>00</del>	<del>01</del>	<del>FE</del>	<del>EC</del>	<del>00</del>
0090	<del>DF</del>	<del>50</del>	<del>B6</del>	<del>EC</del>	<del>04</del>	<del>01</del>	<del>FE</del>	<del>EC</del>	<del>04</del>	<del>DF</del>	<del>52</del>	<del>96</del>	<del>50</del>	<del>2B</del>	<del>0B</del>	<del>81</del>
00A0	<del>04</del>	<del>2B</del>	<del>13</del>	<del>CE</del>	<del>04</del>	<del>00</del>	<del>DF</del>	<del>50</del>	<del>20</del>	<del>12</del>	<del>40</del>	<del>81</del>	<del>05</del>	<del>2B</del>	<del>07</del>	<del>CE</del>
00B0	<del>FC</del>	<del>00</del>	<del>DF</del>	<del>50</del>	<del>20</del>	<del>06</del>	<del>73</del>	<del>00</del>	<del>00</del>	<del>73</del>	<del>00</del>	<del>00</del>	<del>73</del>	<del>00</del>	<del>00</del>	<del>20</del>
00C0	<del>3F</del>	<del>D9</del>	<del>12</del>	<del>12</del>	<del>D9</del>	<del>C9</del>	<del>12</del>	<del>12</del>	<del>D9</del>	<del>D9</del>	<del>16</del>	<del>12</del>	<del>C9</del>	<del>D9</del>	<del>12</del>	<del>12</del>
00D0	<del>68</del>	<del>D9</del>	<del>12</del>	<del>12</del>	<del>D9</del>	<del>C9</del>	<del>12</del>	<del>12</del>	<del>68</del>	<del>F9</del>	<del>12</del>	<del>12</del>	<del>D9</del>	<del>D9</del>	<del>12</del>	<del>12</del>
00E0	<del>C9</del>	<del>D9</del>	<del>12</del>	<del>12</del>	<del>D9</del>	<del>D9</del>	<del>02</del>	<del>02</del>	<del>D9</del>	<del>D9</del>	<del>12</del>	<del>12</del>	<del>D9</del>	<del>D9</del>	<del>12</del>	<del>12</del>
00F0	<del>B9</del>	<del>C9</del>	<del>12</del>	<del>12</del>	<del>D9</del>	<del>D9</del>	<del>12</del>	<del>03</del>	<del>D9</del>	<del>D9</del>	<del>12</del>	<del>12</del>	<del>C9</del>	<del>F9</del>	<del>12</del>	<del>02</del>
0100	<del>96</del>	<del>53</del>	<del>43</del>	<del>9B</del>	<del>51</del>	<del>24</del>	<del>04</del>	<del>C6</del>	<del>01</del>	<del>20</del>	<del>03</del>	<del>01</del>	<del>01</del>	<del>5F</del>	<del>D7</del>	<del>5A</del>
0110	<del>D6</del>	<del>52</del>	<del>53</del>	<del>DB</del>	<del>50</del>	<del>DB</del>	<del>5A</del>	<del>57</del>	<del>46</del>	<del>57</del>	<del>46</del>	<del>D7</del>	<del>58</del>	<del>97</del>	<del>59</del>	<del>01</del>
0120	<del>D6</del>	<del>59</del>	<del>96</del>	<del>58</del>	<del>01</del>	<del>01</del>	<del>4D</del>	<del>2B</del>	<del>21</del>	<del>84</del>	<del>07</del>	<del>26</del>	<del>0F</del>	<del>C4</del>	<del>80</del>	<del>26</del>
0130	<del>0E</del>	<del>D6</del>	<del>59</del>	<del>D7</del>	<del>66</del>	<del>86</del>	<del>7F</del>	<del>10</del>	<del>97</del>	<del>67</del>	<del>20</del>	<del>34</del>	<del>01</del>	<del>01</del>	<del>01</del>	<del>86</del>
0140	<del>7F</del>	<del>97</del>	<del>66</del>	<del>C6</del>	<del>00</del>	<del>D7</del>	<del>67</del>	<del>01</del>	<del>20</del>	<del>26</del>	<del>43</del>	<del>84</del>	<del>07</del>	<del>26</del>	<del>11</del>	<del>53</del>
0150	<del>C4</del>	<del>80</del>	<del>26</del>	<del>10</del>	<del>D6</del>	<del>59</del>	<del>53</del>	<del>D7</del>	<del>67</del>	<del>86</del>	<del>7F</del>	<del>10</del>	<del>97</del>	<del>66</del>	<del>20</del>	<del>30</del>
0160	<del>01</del>	<del>01</del>	<del>01</del>	<del>01</del>	<del>86</del>	<del>7F</del>	<del>97</del>	<del>67</del>	<del>C6</del>	<del>00</del>	<del>D7</del>	<del>66</del>	<del>01</del>	<del>01</del>	<del>20</del>	<del>20</del>
0170	<del>86</del>	<del>7F</del>	<del>4A</del>	<del>2A</del>	<del>FD</del>	<del>96</del>	<del>66</del>	<del>4A</del>	<del>2A</del>	<del>FD</del>	<del>CE</del>	<del>F8</del>	<del>00</del>	<del>FF</del>	<del>EF</del>	<del>00</del>
0180	<del>FF</del>	<del>EF</del>	<del>02</del>	<del>96</del>	<del>67</del>	<del>4A</del>	<del>2A</del>	<del>FD</del>	<del>CE</del>	<del>F8</del>	<del>00</del>	<del>FF</del>	<del>EF</del>	<del>00</del>	<del>FF</del>	<del>EF</del>
0190	<del>96</del>	<del>66</del>	<del>D6</del>	<del>67</del>	<del>4A</del>	<del>2A</del>	<del>FD</del>	<del>CE</del>	<del>F8</del>	<del>00</del>	<del>FF</del>	<del>EF</del>	<del>00</del>	<del>FF</del>	<del>EF</del>	<del>02</del>
01A0	<del>5A</del>	<del>2A</del>	<del>FD</del>	<del>86</del>	<del>7F</del>	<del>4A</del>	<del>2A</del>	<del>FD</del>	<del>20</del>	<del>06</del>	<del>FD</del>	<del>FF</del>	<del>39</del>	<del>39</del>	<del>FF</del>	<del>FF</del>
01B0	<del>B6</del>	<del>EC</del>	<del>02</del>	<del>01</del>	<del>FE</del>	<del>EC</del>	<del>02</del>	<del>DF</del>	<del>54</del>	<del>B6</del>	<del>EC</del>	<del>06</del>	<del>01</del>	<del>FE</del>	<del>EC</del>	<del>06</del>
01C0	<del>DF</del>	<del>56</del>	<del>96</del>	<del>54</del>	<del>2B</del>	<del>0B</del>	<del>81</del>	<del>04</del>	<del>2B</del>	<del>13</del>	<del>CE</del>	<del>04</del>	<del>00</del>	<del>DF</del>	<del>54</del>	<del>20</del>
01D0	<del>12</del>	<del>40</del>	<del>81</del>	<del>05</del>	<del>2B</del>	<del>07</del>	<del>CE</del>	<del>FC</del>	<del>00</del>	<del>DF</del>	<del>54</del>	<del>20</del>	<del>06</del>	<del>73</del>	<del>00</del>	<del>00</del>
01E0	<del>73</del>	<del>00</del>	<del>00</del>	<del>73</del>	<del>00</del>	<del>00</del>	<del>96</del>	<del>5E</del>	<del>2A</del>	<del>16</del>	<del>20</del>	<del>54</del>	<del>66</del>	<del>6B</del>	<del>00</del>	<del>00</del>
01F0	<del>2C</del>	<del>2C</del>	<del>10</del>	<del>18</del>	<del>4C</del>	<del>2C</del>	<del>00</del>	<del>00</del>	<del>4C</del>	<del>4C</del>	<del>02</del>	<del>00</del>	<del>6C</del>	<del>2D</del>	<del>00</del>	<del>00</del>
0200	<del>96</del>	<del>51</del>	<del>43</del>	<del>9D</del>	<del>55</del>	<del>24</del>	<del>04</del>	<del>C6</del>	<del>01</del>	<del>20</del>	<del>03</del>	<del>01</del>	<del>01</del>	<del>5F</del>	<del>D7</del>	<del>5A</del>
0210	<del>D6</del>	<del>50</del>	<del>53</del>	<del>DB</del>	<del>54</del>	<del>DB</del>	<del>5A</del>	<del>2A</del>	<del>01</del>	<del>53</del>	<del>C4</del>	<del>07</del>	<del>26</del>	<del>06</del>	<del>86</del>	<del>1F</del>
0220	<del>97</del>	<del>60</del>	<del>20</del>	<del>07</del>	<del>7A</del>	<del>00</del>	<del>60</del>	<del>2A</del>	<del>02</del>	<del>20</del>	<del>76</del>	<del>86</del>	<del>80</del>	<del>97</del>	<del>5E</del>	<del>20</del>
0230	<del>4F</del>	<del>06</del>	<del>ED</del>	<del>ED</del>	<del>26</del>	<del>1F</del>	<del>ED</del>	<del>ED</del>	<del>36</del>	<del>26</del>	<del>ED</del>	<del>ED</del>	<del>06</del>	<del>26</del>	<del>ED</del>	<del>ED</del>
0240	<del>96</del>	<del>53</del>	<del>43</del>	<del>9B</del>	<del>57</del>	<del>24</del>	<del>04</del>	<del>C6</del>	<del>01</del>	<del>20</del>	<del>03</del>	<del>01</del>	<del>01</del>	<del>5F</del>	<del>D7</del>	<del>5A</del>
0250	<del>D6</del>	<del>52</del>	<del>53</del>	<del>DB</del>	<del>56</del>	<del>DB</del>	<del>5A</del>	<del>2A</del>	<del>01</del>	<del>53</del>	<del>C4</del>	<del>07</del>	<del>26</del>	<del>06</del>	<del>86</del>	<del>1F</del>
0260	<del>97</del>	<del>62</del>	<del>20</del>	<del>07</del>	<del>7A</del>	<del>00</del>	<del>62</del>	<del>2A</del>	<del>02</del>	<del>20</del>	<del>36</del>	<del>86</del>	<del>08</del>	<del>97</del>	<del>5E</del>	<del>20</del>
0270	<del>0F</del>	<del>F8</del>	<del>12</del>	<del>12</del>	<del>D9</del>	<del>C9</del>	<del>12</del>	<del>12</del>	<del>C9</del>	<del>D9</del>	<del>12</del>	<del>10</del>	<del>D9</del>	<del>C9</del>	<del>12</del>	<del>02</del>
0280	<del>96</del>	<del>58</del>	<del>2A</del>	<del>04</del>	<del>96</del>	<del>67</del>	<del>20</del>	<del>04</del>	<del>96</del>	<del>66</del>	<del>01</del>	<del>01</del>	<del>84</del>	<del>40</del>	<del>27</del>	<del>09</del>
0290	<del>DE</del>	<del>64</del>	<del>09</del>	<del>DF</del>	<del>64</del>	<del>26</del>	<del>07</del>	<del>20</del>	<del>08</del>	<del>CE</del>	<del>04</del>	<del>00</del>	<del>DF</del>	<del>64</del>	<del>7E</del>	<del>CC</del>
02A0	<del>80</del>	<del>CE</del>	<del>00</del>	<del>00</del>	<del>FF</del>	<del>EF</del>	<del>06</del>	<del>86</del>	<del>04</del>	<del>CE</del>	<del>7F</del>	<del>FF</del>	<del>09</del>	<del>26</del>	<del>FD</del>	<del>4A</del>
02B0	<del>26</del>	<del>F7</del>	<del>7E</del>	<del>CC</del>	<del>6A</del>	<del>36</del>	<del>EC</del>	<del>ED</del>	<del>26</del>	<del>27</del>	<del>ED</del>	<del>ED</del>	<del>36</del>	<del>06</del>	<del>FD</del>	<del>ED</del>
02C0	<del>08</del>	<del>C9</del>	<del>12</del>	<del>92</del>	<del>C9</del>	<del>C9</del>	<del>12</del>	<del>12</del>	<del>D9</del>	<del>E9</del>	<del>02</del>	<del>02</del>	<del>E9</del>	<del>ED</del>	<del>10</del>	<del>02</del>
02D0	<del>68</del>	<del>E9</del>	<del>12</del>	<del>12</del>	<del>C9</del>	<del>C9</del>	<del>12</del>	<del>02</del>	<del>E9</del>	<del>D6</del>	<del>12</del>	<del>12</del>	<del>E9</del>	<del>D9</del>	<del>12</del>	<del>12</del>
02E0	<del>68</del>	<del>C8</del>	<del>11</del>	<del>12</del>	<del>D9</del>	<del>C9</del>	<del>12</del>	<del>12</del>	<del>E9</del>	<del>E9</del>	<del>12</del>	<del>12</del>	<del>D9</del>	<del>D9</del>	<del>02</del>	<del>12</del>
02F0	<del>C9</del>	<del>F8</del>	<del>12</del>	<del>13</del>	<del>C9</del>	<del>C9</del>	<del>12</del>	<del>12</del>	<del>D9</del>	<del>D9</del>	<del>12</del>	<del>12</del>	<del>C9</del>	<del>F9</del>	<del>12</del>	<del>12</del>
0300	<del>B7</del>	<del>B7</del>	<del>FD</del>	<del>FD</del>	<del>F7</del>	<del>77</del>	<del>FD</del>	<del>FD</del>	<del>13</del>	<del>57</del>	<del>FD</del>	<del>FD</del>	<del>32</del>	<del>97</del>	<del>FF</del>	<del>FD</del>
0310	<del>77</del>	<del>93</del>	<del>ED</del>	<del>FF</del>	<del>93</del>	<del>F7</del>	<del>FF</del>	<del>F9</del>	<del>93</del>	<del>F3</del>	<del>FD</del>	<del>FF</del>	<del>83</del>	<del>93</del>	<del>FD</del>	<del>FF</del>
0320	<del>D3</del>	<del>D3</del>	<del>FF</del>	<del>FF</del>	<del>D3</del>	<del>D7</del>	<del>FD</del>	<del>FD</del>	<del>53</del>	<del>D3</del>	<del>FF</del>	<del>FD</del>	<del>D3</del>	<del>93</del>	<del>FF</del>	<del>FF</del>
0330	<del>87</del>	<del>97</del>	<del>FF</del>	<del>FF</del>	<del>92</del>	<del>D3</del>	<del>FF</del>	<del>DB</del>	<del>93</del>	<del>92</del>	<del>FF</del>	<del>FD</del>	<del>92</del>	<del>63</del>	<del>FF</del>	<del>FD</del>
0340	<del>0C</del>	<del>00</del>	<del>02</del>	<del>10</del>	<del>2C</del>	<del>68</del>	<del>10</del>	<del>20</del>	<del>6C</del>	<del>2C</del>	<del>00</del>	<del>02</del>	<del>4C</del>	<del>2C</del>	<del>00</del>	<del>00</del>
0350	<del>2C</del>	<del>0C</del>	<del>02</del>	<del>02</del>	<del>AC</del>	<del>28</del>	<del>00</del>	<del>00</del>	<del>0C</del>	<del>2C</del>	<del>02</del>	<del>00</del>	<del>6C</del>	<del>2B</del>	<del>00</del>	<del>00</del>
0360	<del>28</del>	<del>28</del>	<del>00</del>	<del>02</del>	<del>0C</del>	<del>EC</del>	<del>04</del>	<del>0A</del>	<del>6C</del>	<del>4C</del>	<del>00</del>	<del>00</del>	<del>6D</del>	<del>7C</del>	<del>00</del>	<del>10</del>
0370	<del>6C</del>	<del>6C</del>	<del>04</del>	<del>0A</del>	<del>0C</del>	<del>0C</del>	<del>10</del>	<del>00</del>	<del>ED</del>	<del>6C</del>	<del>00</del>	<del>00</del>	<del>4B</del>	<del>EC</del>	<del>10</del>	<del>12</del>
0380	<del>F3</del>	<del>D7</del>	<del>FD</del>	<del>FD</del>	<del>93</del>	<del>D9</del>	<del>FF</del>	<del>F3</del>	<del>13</del>	<del>92</del>	<del>FF</del>	<del>FF</del>	<del>D3</del>	<del>D3</del>	<del>FF</del>	<del>FF</del>
0390	<del>D3</del>	<del>D7</del>	<del>FF</del>	<del>FD</del>	<del>F3</del>	<del>F3</del>	<del>FF</del>	<del>FD</del>	<del>73</del>	<del>F3</del>	<del>FF</del>	<del>FF</del>	<del>93</del>	<del>93</del>	<del>FF</del>	<del>FF</del>
03A0	<del>F7</del>	<del>D3</del>	<del>FD</del>	<del>FD</del>	<del>F2</del>	<del>F3</del>	<del>FF</del>	<del>ED</del>	<del>67</del>	<del>D3</del>	<del>FF</del>	<del>F7</del>	<del>93</del>	<del>F2</del>	<del>FF</del>	<del>FF</del>
03B0	<del>F7</del>	<del>D7</del>	<del>FF</del>	<del>F9</del>	<del>F3</del>	<del>73</del>	<del>FF</del>	<del>EF</del>	<del>F3</del>	<del>93</del>	<del>DF</del>	<del>FF</del>	<del>53</del>	<del>D3</del>	<del>ED</del>	<del>FF</del>
03C0	<del>4C</del>	<del>69</del>	<del>12</del>	<del>10</del>	<del>4C</del>	<del>00</del>	<del>02</del>	<del>6C</del>	<del>6C</del>	<del>00</del>	<del>00</del>	<del>6C</del>	<del>4C</del>	<del>02</del>	<del>00</del>	<del>00</del>
03D0	<del>28</del>	<del>49</del>	<del>00</del>	<del>10</del>	<del>6C</del>	<del>6C</del>	<del>00</del>	<del>00</del>	<del>0B</del>	<del>4C</del>	<del>00</del>	<del>00</del>	<del>4C</del>	<del>4C</del>	<del>00</del>	<del>00</del>
03E0	<del>68</del>	<del>09</del>	<del>02</del>	<del>00</del>	<del>4C</del>	<del>68</del>	<del>06</del>	<del>00</del>	<del>2C</del>	<del>EC</del>	<del>00</del>	<del>00</del>	<del>6C</del>	<del>5C</del>	<del>00</del>	<del>00</del>
03F0	<del>03</del>	<del>6C</del>	<del>10</del>	<del>16</del>	<del>0C</del>	<del>0B</del>	<del>00</del>	<del>00</del>	<del>6C</del>	<del>8C</del>	<del>10</del>	<del>00</del>	<del>6C</del>	<del>6B</del>	<del>CC</del>	<del>6A</del>

# NOTES:

1. Data lined through is not used.
2. Starting Address is loaded in locations 03FE16 & 03FF16.
3. Addresses and data are hexadecimal notation.

Figure A-6. PROM Map

## APPENDIX B

### HYDRA-POWERED ALTERNATOR (HPA)

## APPENDIX B

### HYDRA-POWERED ALTERNATOR (HPA)

This appendix contains detailed information on the HPA used for the HOF-CAS including descriptive data, dimensions, and weight. The HPA efficiency, design specification, and test specification are also discussed.

#### B.1 HPA DESCRIPTION

The HPA used for the HOF-CAS program uses a simple, highly reliable, jet-turbine device which is capable of 26 watts of output power with .72 gpm (2.7 L/m) of fluid flow with 3000 psi (21 MPa). A 2" (5.1 cm) diameter turbine wheel coupled to a conventional P.M. electric generator is spun by fluid discharged by an .020" (.05 cm) diameter orifice. (See Figures 2-4 and 2-5). Rotating speeds of 10,000 rpm are achievable while delivering 26 watts of electric power. The selection of a six pole generator provides a frequency of 1000 Hertz. Generator characteristics determine the waveform of the output. The generator used was an Electro Kenetic P/N 4922-2. The output was sinusoidal with a resistance load attached. This tended to distort to a psuedo square wave when inductive loads were applied. The voltage with any given load was proportional to rpm. The design output was 26 volts AC when loaded with a  $27\Omega$  resistance.

The HPA, weighing 2.2 pounds, is shown dimensionally in Figures B-1, B-2 and B-3. The unit used for this project was designed and built by Parker-Bertea. An endurance test of over 1000 hours was successfully conducted prior to incorporating the HPA into the HOF-CAS. During the HOF-CAS laboratory tests approximately 100 hours of additional operating time were accumulated on the HPA.

#### B.2 HPA EFFICIENCY

The high speed turbine of the hydra-alternator utilizes the mass-momentum of the fluid for drive. While this is the simplest drive form possible, it results in low energy conversion efficiency which produces increased hydraulic flow.

The hydra-alternator for the HOF-CAS program, requires a flow of 0.72 gpm at 3000 psi to generate 26 watts of electrical power. If only energy conversion efficiency is considered it can be calculated as follows:



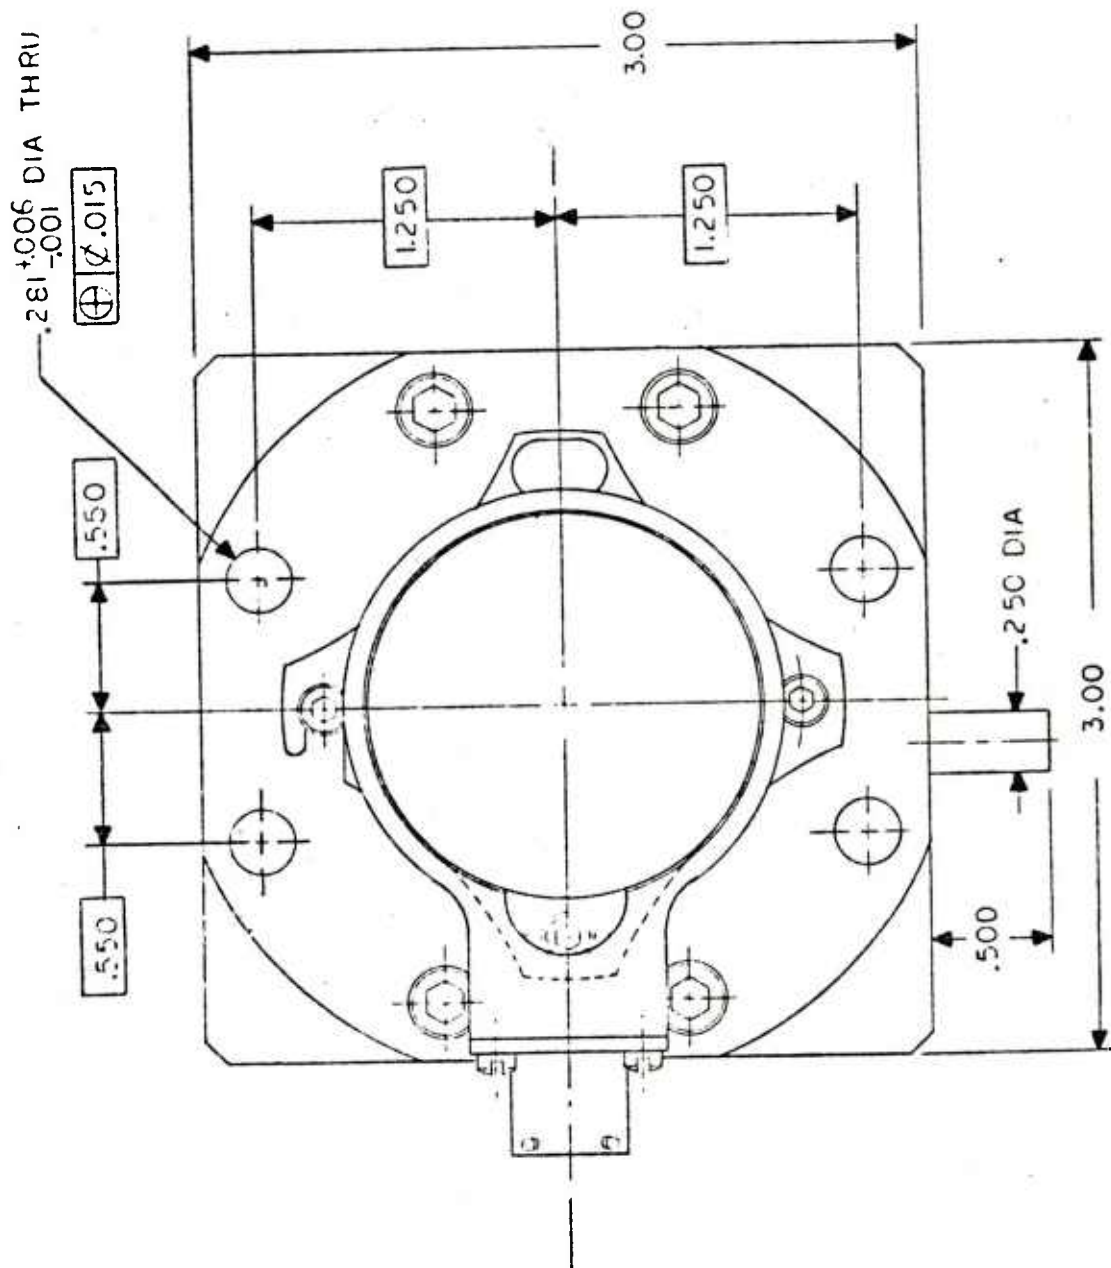


Figure B-2. HPA, Top View



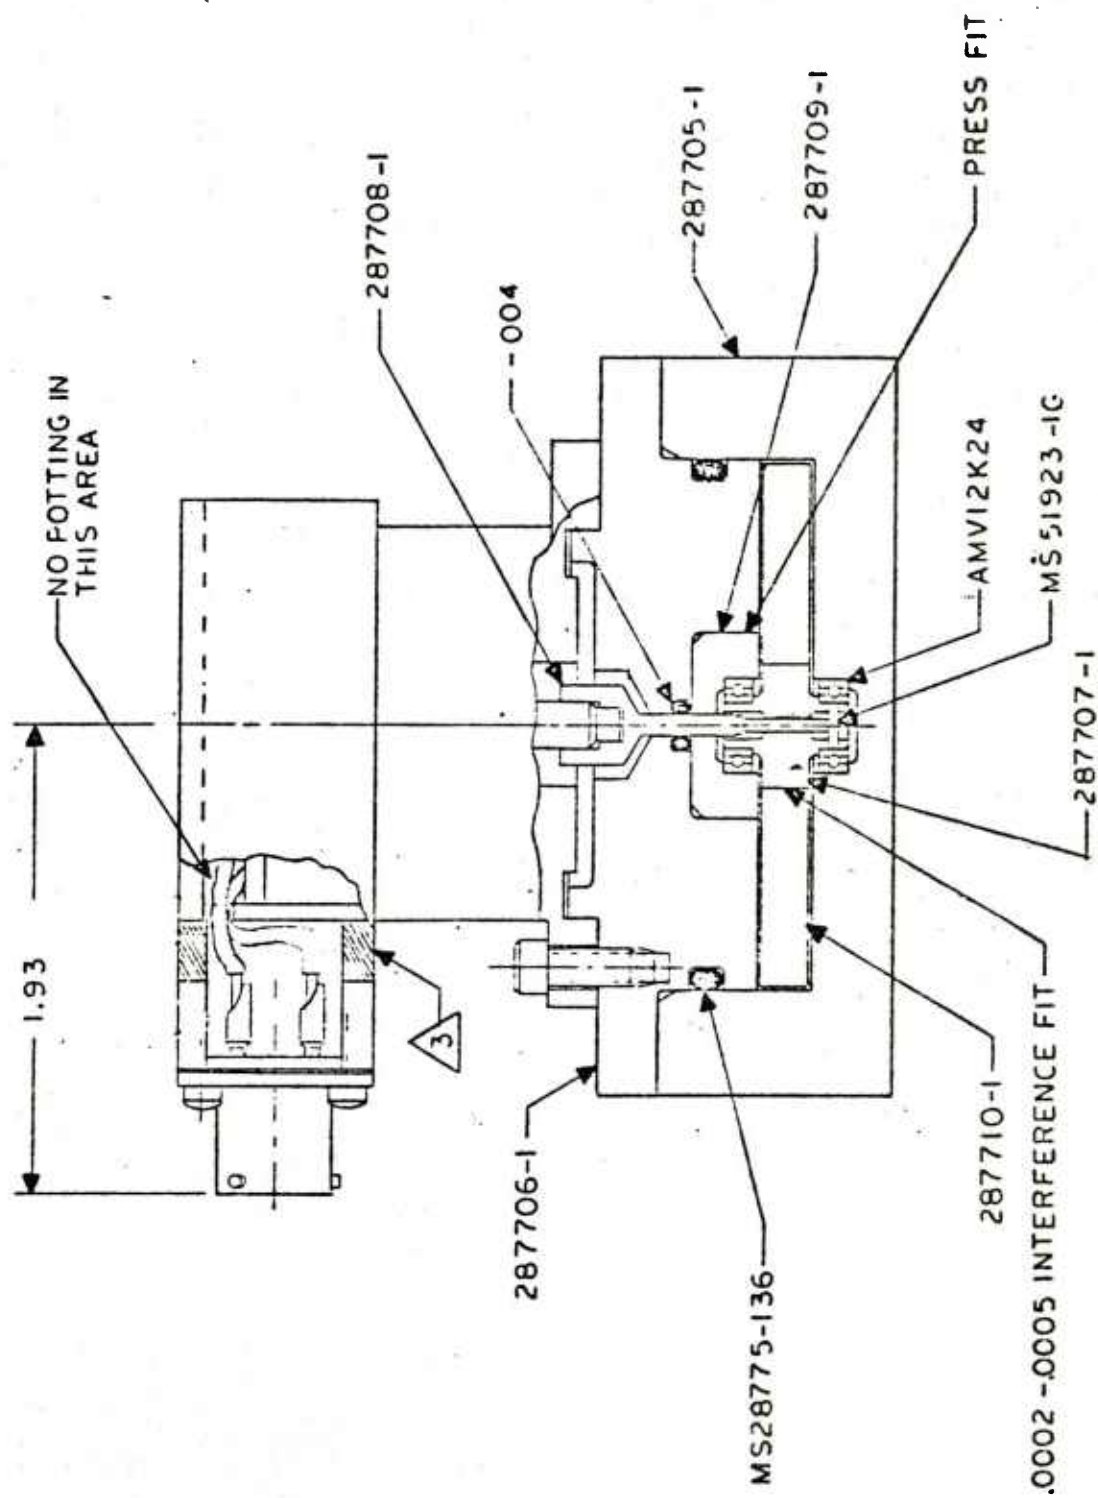


Figure B-3. HPA, Sectioned View



$$HP = \frac{GPM \times \Delta P}{1714} = \frac{0.72 \times 3000}{1714} = 1.26$$

Where HP = horsepower, GPM = gallon per minute flow,  $\Delta P$  = pressure drop and 1714 is a scaling constant.

As one HP = 746 watts

$$W \text{ input} = 1.26 \times 746 = 940$$

$$\% \text{ efficiency} = \frac{W \text{ output}}{W \text{ input}} \times 100 = \frac{26}{940} \times 100 = 2.8\%$$

Turbine windage in the fluid filled cavity is a major contributor to this inefficiency. The high turbine speed of 10,000 rpm tends to emphasize the turbine losses. Other means of driving the alternator, such as a positive displacement hydraulic motor or a slower turbine speed, have been considered. All of these approaches would increase complexity and add size and weight to the HPA.

Studies by the supplier to reduce the losses of the present design show that a smaller diameter turbine wheel, 0.75 inches (1.9 cm) compared to 2 inches (5.1 cm), could double the output with the same flow. Also a generator has been tested which has smaller air gaps and will supply 20% additional power at the same rpm. Should the efficiency be doubled or tripled, it would still remain a low number. The major advantage of this design is its simplicity and relatively low cost when compared to gear trains and positive displacement hydraulic motors.

When evaluating a device of this type its impact on the aircraft must be considered. While the unit efficiency is very low, the total flow requirement is not significant. To keep this number in perspective some typical aircraft flow capabilities are:

<u>Aircraft</u>	<u>GPM</u>	<u>L/M</u>
F-15	224	848
F-14	168	636
A-7	80	303
A-6	56	212
F-18	112	424
F-16	85	322

Present day actuators for fly-by-wire aircraft have leakage rates of 0.5 gpm (1.9 L/m) to 1.0 gpm (3.8 L/m). Adding 10 to 20 hydra-alternators to an aircraft would not have a major impact on aircraft hydraulic system.

### B.3

#### HPA POWER OUTPUT AND TRANSIENT RESPONSE

When the HPA was designed it was determined that the inertia of the turbine and alternator plus the hydraulic drive design would be sufficient to maintain alternator speed for transient overloads. This proved to be essentially correct. Also with the low efficiency of the hydraulic drive, the alternator output has very little effect on the turbine speed. The alternator selected by the supplier is wound to provide load protection, and any attempt to draw additional current beyond rated value results in an immediate voltage drop. Therefore the design of the alternator selected for the HPA precluded the transient power capability even though the hydraulic turbine was able to maintain speed.

To obtain full actuation system capability, the HPA must be able to supply maximum required power. Sizing the unit to the peak power requirement would result in a noticeable larger alternator. The alternator should be designed so that a short term overload capability, similar to aircraft power systems, is available. This may require an alternator to be designed specifically for this specification.

### B.4

#### HPA SPECIFICATION

The performance specification for the HPA is contained in Table B-I. The requirements for items 2, 5, and 7 of Table B-I were not attainable with the developmental unit, and are as follows:

- Item 2, Operating Pressures

A proof pressure of 3500 psi was used in lieu of 4500 psi as specified. The supplier expressed concern that the unit might be damaged by the requested proof pressures and therefore the unit was not evaluated at the higher pressures. This is not a major concern for a research unit but would be needed for general production applications.


- Item 5, Transients

The output peak power requirement was not met and as discussed in Section 4, resulted in the performance limitations of the HOFAS. The average or steady-state power requirements of the HPA were adequate to power the D<sup>3</sup> actuator for normal system operations. However for step inputs or high frequency response requirements the actuator electronics (EDU) can require up to 50 watts. Without this level of power the transient response performance of the actuator is reduced.

Table B-I. Performance Specification

Performance

1. Rated Inlet Pressure. The rated inlet pressure of the unit shall be 3000 psi. This pressure is defined as the maximum system pressure for which the unit is designed to operate continuously at rated temperature and rated speed.
2. Operating Pressures. The operating pressure limits and peak impulse pressure for the inlet and outlet shall be 4500 psi on the pressure port and 2250 psi on the return port.
3. Ambient Conditions. The unit shall operate with ambient temperature and pressures of 0°C at 30,000 feet altitude and 50°C at sea level. The alternator shall be designed to operate with a maximum continuous fluid temperature at the inlet port of 135°C.
4. Rated Power Output. The alternator shall deliver 25 watts of average power at 26 VAC 1K Hz.
5. Transients. The transient and steady state voltage shall remain within the limits shown for all normal load conditions while the system is operating under all the environmental conditions.
6. Output Peak Power. The unit shall deliver 50 watts of peak power, 0.2 second maximum. At this peak power output, the voltage and frequency change shall be within 10% of rated power.
7. Rated Power Input. The unit shall not demand more than 0.5 gpm at 3000 psi.

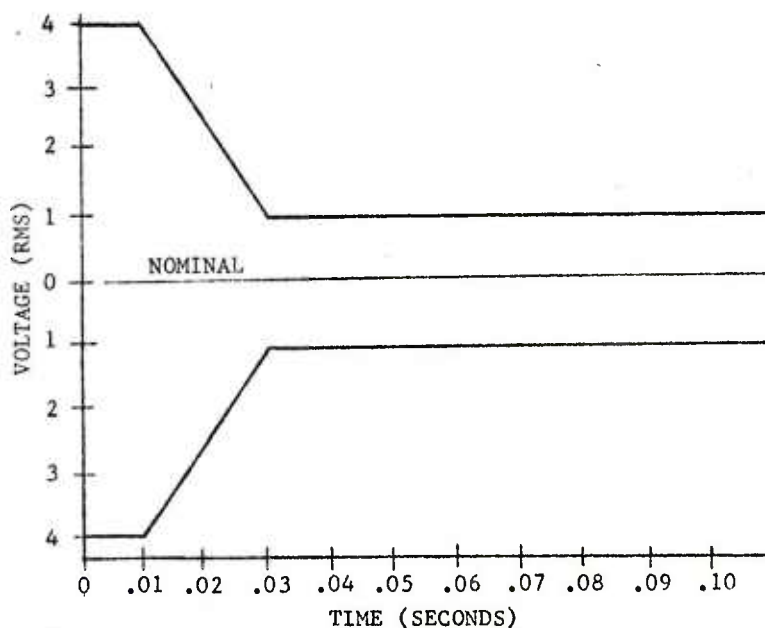

Transient and Steady State Regulation @ Rated Capacity

- Item 7, Rated Power Output

The rated power requirement was not met, and is discussed in detail in paragraph B.1 of this Appendix.

In writing a new specification for an HPA, all the performance requirements originally specified for this unit should be required and all applicable military specifications should be met. (Table B-II is a list of military specifications used for this unit.) The HPA should be sized for the specific application. The smaller turbine wheel (0.75 inches) design should be included, to improve efficiency and produce a smaller, more compact package. The unit should be modular in design so that it could be easily added to an actuator and can also be readily removed for maintenance actions.

B.5 BERTEA ACCEPTANCE TEST PROCEDURE NO. 287700T HYDRAULIC ALTERNATOR

The enclosed Bertea Acceptance Test Procedure No. 287700T, Hydraulic Alternator, was performed on the HPA by the supplier before shipment to Rockwell. The Acceptance Test Data Sheet with test results is also included.

The results of the temperature performance tests (Item 10) of this procedure demonstrate the effects of hydraulic fluid viscosity on the HPA output. If the speed (frequency) of the alternator is compared to the viscosity of the hydraulic fluid at various temperatures, the results contained in test #10 of the Acceptance Test Procedure are considered normal. The low alternator output at 0°F is not a concern for the T-2C application since the fluid temperature increases rapidly after starting the aircraft engines and hydraulic pumps. The effect of oil viscosity on the HPA power output should not be overlooked, however, since there are potential applications of the HOF-CAS concept where the low temperature operation could result in significant operational problems.

Table B-II. Applicable Military Specifications

Federal

QQ-C-320	Chromium Plating (Electrodeposited)
QQ-P-416	Plating, Cadmium (Electrodeposited)
QQ-Z-325	Zinc Coating, Electrodeposited, Requirements for

Military

MIL-P-116	Preservation, Method of
MIL-D-1000	Drawings, Engineering and Associated Lists
MIL-C-5501	Caps and Plugs, Protective, Dust and Moisture Seal
MIL-H-83282	Hydraulic Fluid, Synthetic Hydrocarbon Base, Aircraft, Missile, and Ordnance
MIL-H-6083	Hydraulic Fluid, Petroleum Base, Preservation and Testing
MIL-P-6906	Plates, Information and Identification
MIL-P-7936	Parts and Equipment, Aeronautical, Preparation for Delivery
MIL-A-8625	Anodic Coatings, for Aluminum and Aluminum Alloys
MIL-C-26482	Connector, Electric Circular, Miniature, Quick Disconnect, Environment Resisting, General Specification for
MIL-H-8775	Hydraulic System Components, Aircraft and Missiles, General Specification for
MIL-F-8815	Filter and Filter Elements, Fluid Pressure, Hydraulic Line, 5 Micron Absolute Type II Systems
MIL-S-8879	Screw Threads, Controlled Radius Root with Increased Minor Diameter; General Specification for

STANDARDS

Military

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-143	Specifications and Standards, Order of Precedence for the Selection of
MIL-STD-781	Reliability Tests: Exponential Distribution
MIL-STD-889	Dissimilar Metals
MS33649	Bosses, Fluid Connection - Internal Straight Thread

<b>BERTEA</b>	CORPORATION IRVINE • CALIFORNIA	CODE IDENT NO 82106	287700-T	REV N/C
<b>ACCEPTANCE TEST PROCEDURE</b> <b>HYDRAULIC ALTERNATOR</b>			SIZE <b>A</b>	P 2
<ol style="list-style-type: none"> <li>1. TEST THE FOLLOWING UNIT TO THIS PROCEDURE. <ol style="list-style-type: none"> <li>A. 287700 HYDRAULIC ALTERNATOR</li> </ol> </li> <li>2. TEST EQUIPMENT <ol style="list-style-type: none"> <li>A. ELECTRONIC COUNTER OR EQUIVALENT FREQUENCY COUNTER</li> <li>B. AC VOLTMETER</li> <li>C. ELECTRONIC PROGRAMMABLE SWITCH</li> </ol> </li> <li>3. TEST FLUID MIL-H-83282 @ 80 TO 130°F CONTAMINATION LEVEL PER BMF 5106.</li> <li>4. RECORD THE TEST RESULTS ON BERTEA TEST DATA SHEETS. SEND ONE COPY OF RESULTS WITH THE UNIT.</li> <li>5. UNLESS OTHERWISE NOTED, THE RETURN PART WILL REMAIN OPEN FOR ALL TESTS.</li> </ol>				



**BERTEA**CORPORATION  
IRVINE • CALIFORNIACODE  
IDENT  
NO .  
82106

287700-T

REV  
A

## ACCEPTANCE TEST PROCEDURE

SIZE

A

P 3

## HYDRAULIC ALTERNATOR

## REQUIREMENTS

## TEST

1. **EXAMINATION OF PRODUCT**  
THE ASSEMBLY IS TO BE EXAMINED FOR DIMENSIONAL COMPLIANCE WITH BERTEA DRAWING 287700.
2. **DIELECTRIC STRENGTH**  
APPLY 500 VAC BETWEEN THE CONNECTOR PINS AND THE ASSEMBLY CASE. NO ARCING OR FLASHOVER ALLOWED.
3. **INSULATION RESISTANCE**  
APPLY 500 VDC BETWEEN THE CONNECTOR PIN AND THE CASE. INSULATION RESISTANCE TO BE 10 MEGOHMS MINIMUM.
4. **ELECTRICAL RESISTANCE**  
MEASURE THE ELECTRICAL RESISTANCE BETWEEN PINS A & B. RECORD THE ELECTRICAL RESISTANCE AND TEMPERATURE. ELECTRICAL RESISTANCE BETWEEN PINS A & B TO BE  $1 \Omega \pm .15 \Omega @ 77^{\circ}\text{F}$ .
5. **PROOF PRESSURE**  
APPLY 50 PSI TO THE PRESSURE PORT WITH THE RETURN PORT OPEN. BLEED ALL AIR FROM THE UNIT. CLOSE THE RETURN LINE AND INCREASE THE SUPPLY PRESSURE TO 3500 PSI. HOLD THE PRESSURE FOR 2 MIN. NO EXTERNAL LEAKAGE OR PERMANENT SET ALLOWED.
6. **BREAK-IN RUN**  
INSTALL A 5 MICRON FILTER IN THE PRESSURE AND RETURN LINE TO THE UNIT. THE BREAK-IN SHALL BE OF ONE HOUR DURATION. APPLY 3000 PSI AT THE PRESSURE PORT AND 50 PSI AT THE RETURN PORT. THE ELECTRICAL OUTPUT BETWEEN PIN A & B IS TO BE VARIED AS FOLLOWS:  

.2 SEC - 50 WATTS

1.8 SEC - 25 WATTS

AT THE COMPLETION OF THE ONE HOUR TEST, THE DOWNSTREAM FILTER IS TO BE COUNTED TO DETERMINE ANY CONTAMINATION GENERATED BY THE ASSEMBLY. EXTERNAL LEAKAGE DURING THE BREAK-IN RUN IS TO BE INSUFFICIENT TO FORM A DROP.

APPLY 3000 PSI TO THE SUPPLY PORT AND RESTRICT THE RETURN LINE TO INDUCE A 50 PSI RETURN PRESSURE. MEASURE THE FREQUENCY AND RMS VOLTAGE WHEN THE GENERATOR IS DELIVERING 25 WATTS OF AVERAGE POWER BETWEEN PINS A & B (25 WATTS OF POWER IS OBTAINED BY DROPPING THE ELECTRICAL OUTPUT BETWEEN PINS A & B ACROSS A 27.04  $\Omega$  RESISTOR)

THE FREQUENCY WILL BE 1000 HERTZ  $\pm$  100 HERTZ AND THE VOLTAGE IS TO BE  $26 \pm 1$  VAC RMS.
7. **RATED POWER OUTPUT**

<b>BERTEA</b> CORPORATION IRVINE • CALIFORNIA		CODE IDENT NO 82106	287700-T	REV A
ACCEPTANCE TEST PROCEDURE HYDRAULIC ALTERNATOR				SIZE A
P 4				
<b>TEST</b>	<b>REQUIREMENTS</b>			
8. RATED POWER INPUT	WITH THE CONDITIONS OF TEST 7, MEASURE THE FLOW AT THE RETURN PORT. FLOW SHALL NOT EXCEED .5 GPM.			
9. OUTPUT POWER PEAK	WITH THE CONDITIONS OF TEST 7 ESTABLISHED, MOMENTARILY (2 SEC.) INCREASE THE ELECTRICAL OUTPUT BETWEEN PINS A & B FROM 25 WATTS TO 50 WATTS. (THIS IS ACCOMPLISHED BY PARALLELING AN ADDITIONAL 27.04 $\Omega$ RESISTOR WITH THE EXISTING 27.04 $\Omega$ RESISTOR) DURING THIS TRANSIENT, RECORD OUTPUT VOLTAGE AND FREQUENCY VOLTAGE AND FREQUENCY WILL NOT VARY BY MORE THAN 10% OF THE VALUES RECORDED IN TEST 7.			
10. TEMPERATURE PERFORMANCE	WITH THE CONDITIONS OF TEST 7 ESTABLISHED, DECREASE THE FLUID TEMPERATURE TO 0°F. RECORD THE VOLTAGE AND FREQUENCY BETWEEN PINS A & B.  RAISE THE FLUID TEMP. TO 275°F. RECORD THE FREQUENCY AND VOLTAGE. BE SURE THE ELECTRICAL LOAD DOES NOT VARY WITH TEMPERATURE CHANGE.			
11. FLUSHING	FLUSH AND FILL THE UNIT WITH MIL-H-6083 AND CAP PORTS.			

<b>BERTEA</b> CORPORATION IRVINE • CALIFORNIA		CODE IDENT NO 82106	287700T	REV A
<b>ACCEPTANCE TEST DATA SHEET</b>				SIZE A P 5
PART NUMBER 287700	DASH NO	PART NAME HYDRAULIC ALTERNATOR	PROJECT T2C	
PAGE OF ACCEPTANCE TEST DATA SHEETS				
SPECIFICATION NO HC 287-5009	CONTR NO N62269-79-C-0709	DATE TESTED 6/5/80	INSPECTION	
TEST	REQUIREMENTS	RESULTS	ACPT	REJ
1 EXAMINATION OF PRODUCT	COMPLIANCE WITH DRAWING 287700	ACCEPTABLE ✓ NOT ACPT. _____	✓	
2 DIELECTRIC STRENGTH	NO ARCING OR FLASHOVER PIN A & B TO BODY (500 VAC)	ACCEPTABLE ✓ NOT ACPT. _____	✓	
3 INSULATION RESISTANCE	500 VDC BETWEEN PIN A & B AND CASE. RESISTANCE TO BE 10 MEGOHM MINIMUM	INSULATION RESISTANCE _____/10 MEG Ω	✓	
4 ELECTRICAL RESISTANCE	ELECTRICAL RESISTANCE BETWEEN PINS A & B TO BE 1 Ω ± .15 Ω AT 77°F	ELEC. RESISTANCE A-B 1 Ω @ 70 °F CORRECTED 1.057 Ω @ 77°F	✓	
5 PROOF PRESSURE	NO EXTERNAL LEAKAGE OR PERMANENT SET	3500 PSI OK		
6 BREAK-IN RUN	ONE HOUR DURATION. CONTAMINATION & EXTERNAL LEAKAGE CHECK	CONTAMINATION No DETECTABLE VIB. ✓ EXTERNAL LEAKAGE NONE ✓		
7 RATED POWER OUTPUT	WHEN DELIVERING 25 WATTS OF POWER THE FREQUENCY IS TO BE 1000 ± 100 HZ AND THE VOLTAGE IS TO BE 26±1 VOLTS	FREQ. 1033 HZ VOLT. 26.4 VAC	✓	
8 RATED POWER INPUT	WHEN DELIVERING 25 WATTS OF ELECTRICAL POWER, THE RETURN FLOW SHALL NOT EXCEED .5 GPM WITH 3000 PSI AT THE SUPPLY PORT	RETURN FLOW .75 GPM		Acceptable Pik & Kohnen 6/5/80
9 OUTPUT POWER PEAK	WITH A MOMENTARY (.2 SEC) INCREASE IN THE OUTPUT, FREQ. & VOLTAGE NOT TO VARY BY MORE THAN 10% OF TEST 7	FREQ. 1011 HZ VOLT. 19.2 VAC		Acceptable Pik & Kohnen
10 TEMP. PERF.	RECORD VOLTAGE & FREQ. @ 0°F & 275°F FLUID TEMP.	VOLT. 3.8 FREQ. 141 C °F VOLT. 2.8 FREQ. 1133 275 °F		
11 FLUSHING	FLUSH WITH MIL-H-6083. FILL AND CAP PORTS	FLUSHED YES CAPPED YES	✓	

## LIST OF ABBREVIATIONS/ACRONYMS

AC	Alternating Current
ABU	Analog Back-Up
ACIA	Asynchronous Interface Adapter
A/D	Analog to Digital
AFCAS	Advanced Flight Control Actuation System
Amp	Ampere
AROM	Alterable Read Only Memory
°C	Degrees Celsius
cc/min	Cubic Centimeters per Minute
c	Centi ( $10^{-2}$ )
cm <sup>3</sup>	Cubic Centimeters
CMD	Pilot Command
CPU	Central Processing Unit
D <sup>3</sup>	Direct Digital Drive
D/A	Digital to Analog
DAC	Digital to Analog Converter
db	Decibel
DC	Direct Current
deg	Degree
DFBL	Digital Fly-By-Light
DFBW	Digital Fly-By-Wire
EDU	Electronic Drive Unit
EMI	Electromagnetic Interference

EMP	Electromagnetic Pulse
°F	Degrees Fahrenheit
ft	Feet
F/T	Force Transducer
ft/sec	Feet per Second
gpm	Gallons per Minute
HOFCAS	Hydra-Optic Flight Control Actuation System
HPA	Hydra-Powered Alternator
hp	Horsepower
HZ	Hertz (Cycles per Second)
in.	Inch
in <sup>2</sup>	Square Inches
in <sup>3</sup>	Cubic Inches
I/O	Input/Output
k	Kilo (10 <sup>3</sup> )
kg	Kilogram
kW	Kilowatt
lb	Pound
L	Liter
LED	Light Emitting Diode
L/m	Liters per Minute
LHS	Lightweight Hydraulic System
LSSB	Laboratory Signal Simulator Box
LVDT	Linear Variable Differential Transformer

m	Meter, also Milli ( $10^{-3}$ ), also Minute
M	Mega ( $10^6$ )
max	Maximum
mm	Millimeter
M/N	Model Number
min	Minute (Time)
MPa	Megapascals
MPU	Microprocessing Unit
ms	Millisecond
m/s	Meters per Second
mv	Millivolt
N	Newton (Metric Unit of Force)
NAAD	North American Aircraft Division
NADC	Naval Air Development Center
No.	Number
$\Delta P$	Differential Pressure
Pa	Pascal (Metric Unit of Pressure)
PIA	Peripheral Interface Adapter
POS	Rudder Position
PROM	Programmable Read Only Memory
psi	Pounds per Square Inch
psia	Pounds per Square Inch Absolute Pressure
psig	Pounds per Square Inch Gauge Pressure
PM	Pulse Modulation



P/N	Part Number
PWM	Pulse Width Modulated
RAM	Random Access Memory
R&D	Research and Development
RFI	Radio Frequency Interference
rms	Root-Mean-Square
ROM	Read Only Memory
rpm	Revolutions per Minute
s	Second (Time), also LaPlace Transform Operator
sec	Second (Time)
V	Volt
VDC	Volts Direct Current
W	Watt
XDCR	Transducer
XFMR	Transformer

# SUMMARY OF METRIC CONVERSIONS

Area	in <sup>2</sup>	x	6.452	=	cm <sup>2</sup>
	ft <sup>2</sup>	x	.0929	=	m <sup>2</sup>
Fluid Flow	gal/min	x	3785	=	cc/min
	gal/min	x	3.785	=	L/min
	in <sup>3</sup> /sec	x	16.39	=	cc/sec
Force	lb	x	4.448	=	N
Length	in	x	2.540	=	cm
	ft	x	.3048	=	m
Mass	lb	x	.4536	=	kg
Pressure, Stress	psi	x	6895	=	Pa (=N/m <sup>2</sup> )
	psi	x	.06895	=	bar
Velocity, Speed	in/sec	x	2.540	=	cm/sec
	ft/sec	x	.3048	=	m/sec
	knots	x	.5144	=	m/sec
Volume	in <sup>3</sup>	x	16.39	=	cm <sup>3</sup> (-cc)
	gal	x	3.785	=	L
	l	x	1000	=	cm <sup>3</sup>
	m <sup>3</sup>	x	1000	=	L